


850 Garnet, 450 Indigo, 400 Caribe, 230 Merigold

Style Name	Color Scp ILLE	
Style Number	5042V	
Construction	SPC with Inline Level Edge	
Class / ASTM F1700	Class III Printed Film Vinyl Tile, Type B (embossed)	
Attached Underlayment	NO	
Finish	ExoGuard+®	
Locking System	Tongue and Groove	
	U.S.	Metric
Nominal Dimensions	7 in w, 48 in l	18 cm w, 122 cm l
Actual Dimensions	7 in w, 48 in l	17.78 cm w, 121.92 cm l
Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Overall Thickness	0.157 in	4 mm
Installation	Direct Glue	
Recommended / Required Adhesive	LokWorx+ (236MM) or S150 (5025M)	

Packaging

Area per box	2796 sq ft	2.6 sq m
Weight per box	42.24 lbs	1916 kg

Recommended Installation Method

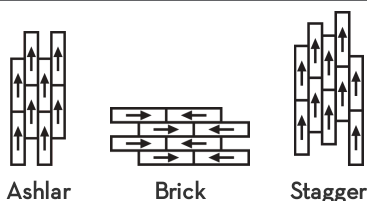

Performance Testing

Static Load (ASTM F970)	Passes (Modified), *2500 lbs
Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Slip Resistance (ASTM D2047)	ADA compliant

Warranties

Commercial Limited Underbed Bond Warranty S150/4151/LokWorx+ Resilient
Resilient 15 Year Commercial Limited

Environmental

Indoor Air Quality	FloorScore® Certified
Recycled Content	Pre-consumer - 20%, Post-consumer - 0%

Specifications are subject to nominal manufacturing variance.
Material supply and/or manufacturing processes may necessitate changes without notice.

