


Style Name	CODEX	
Style Number	5609V	
Construction	Heavy Commercial Luxury Vinyl Tile	
Class / ASTM F1700	Class III Printed Film Vinyl Tile, Type B (embossed)	
Attached Underlayment	No	
Finish	ExoGuard®	
	U.S.	Metric
Nominal Dimensions	8 in w, 48 in l	20.5 cm w, 122 cm l
Actual Dimensions	8 in w, 48 in l	20.32 cm w, 121.92 cm l
Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Overall Thickness	0.098 in	2.5 mm
Installation	Direct Glue	
Recommended / Required Adhesive	LokWorx+ (236MM) or S150 (5025M)	

**Packaging**

Pieces per box	16 pcs	
Area per box	42.66 sq ft	3.96 sq m
Weight per box	38.32 lbs	17.38 kg

**Recommended Installation Method**

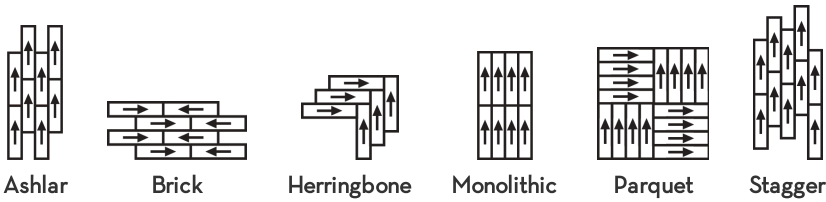

**Performance Testing**

Static Load (ASTM F970)	<b>Passes (Modified), *1000 lbs</b>
Residual Indentation (ASTM F1914)	<b>Passes</b>
Resistance to Heat (ASTM F1514)	<b>Passes</b>
Resistance to Light (ASTM F1515)	<b>Passes</b>
Resistance to Chemicals (ASTM F925)	<b>Passes</b>
Radiant Panel (ASTM E648)	<b>Passes, Class I</b>
Slip Resistance (ASTM D2047)	<b>ADA compliant</b>

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

**Warranties**

Commercial Limited Underbed Bond Warranty S150/4151/LokWorx+ Resilient  
Resilient 15 Year Commercial Limited

**Environmental**

Recycled Content Pre-consumer - 0%, Post-consumer - 0%

Specifications are subject to nominal manufacturing variance.  
Material supply and/or manufacturing processes may necessitate changes without notice.