





100 Statuary




102 Crema




400 Lapidica



500 Neolith




504 Tourmaline



505 Onyx



700 Macchia



703 Emperador



505 Onyx


# CROSS CUT

Style Name	CROSS CUT	
Style Number	5655V	
Construction	Heavy Commercial Luxury Vinyl	
Class / ASTM F1700	Class III Printed Film Vinyl Tile, Type B (embossed)	
Attached Underlayment	No	
Finish	ExoGuard®	
Nominal Dimensions	U.S. 9 in w, 63 in l	Metric 23 cm w, 160 cm l
Actual Dimensions	9 in w, 63 in l	22.86 cm w, 160.02 cm l
Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Overall Thickness	0.197 in	5 mm
Installation	Direct Glue, Floating or Perimeter Gl	
Recommended / Required Adhesive	Shaw 4100 or S150	

## Packaging

Pieces per box	6 pcs	
Area per box	23.62 sq ft	2.19 sq m
Weight per box	41.03 lbs	18.61 kg

## Recommended Installation Method

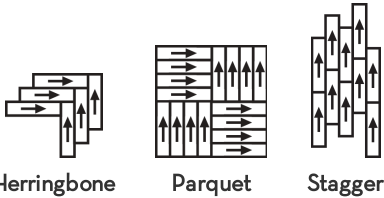

## Performance Testing

Static Load (ASTM F970)	Passes (Modified), *750 lbs
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Slip Resistance (ASTM D2047)	ADA compliant

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Warranties

Commercial Limited Underbed Bond Warranty S150/4151/LokWorx+ Resilient  
Resilient 15 Year Commercial Limited

## Environmental

Recycled Content Pre-consumer - 0%, Post-consumer - 0%

Specifications are subject to nominal manufacturing variance.  
Material supply and/or manufacturing processes may necessitate changes without notice.