




1206 Serene Sand




1207 Whispering Beige




2096 Soft Sepia




5222 Calm Grey



6043 Subdued Sienna



7309 Delicate Pewter



7310 Soothing Sable




1206 Serene Sand

Style Name	Quietude	
Style Number	5683V	
Construction	Commercial Luxury Vinyl Tile w/Acoustic Backing	
Class / ASTM F1700	Class III Printed Film Vinyl Tile, Type B (embossed)	
Attached Underlayment	Yes	
Finish	ExoGuard [®]	
	U.S.	Metric
Nominal Dimensions	6 in w, 48 in l	15 cm w, 122 cm l
Actual Dimensions	6 in w, 48 in l	15.24 cm w, 121.92 cm l
Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Overall Thickness	0.197 in	5 mm
Installation	Direct Glue	
Recommended / Required Adhesive	LokWorx + 4 gal (236MM), LokWorx + 1 gal (235MM), LokWorx 4 gal (239MM), LokWorx 1 gal (240MM) or S150 (5405V)	

Packaging

Pieces per box	10 pcs	
Area per box	20 sq ft	1.86 sq m
Weight per box	27.65 lbs	12.54 kg

Recommended Installation Method

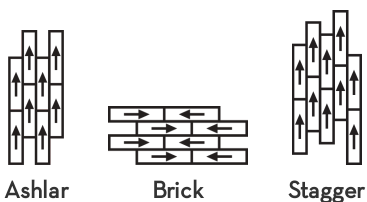

Warranties

Resilient 15 Year Commercial Limited

Environmental

Indoor Air Quality	FloorScore [®] Certified
Recycled Content	Pre-consumer - 0%, Post-consumer - 0%

Specifications are subject to nominal manufacturing variance.
Material supply and/or manufacturing processes may necessitate changes without notice.