

# BRIDGE

## KITCHEN FAUCET

SKU: 907536, 913187

### BEFORE YOU BEGIN

We recommend consulting a professional if you are unfamiliar with installing plumbing fixtures. Signature Hardware accepts no liability for any damage to the faucet, plumbing, sink, counter top, or for personal injury during installation.

Observe all local plumbing and building codes.

Unpack and inspect the faucet for shipping damage. If any damage is found, contact our Customer Relations team at 1-855-715-1800.

---

### GETTING STARTED

- Ensure that you have gathered all the required materials that are needed for the installation.
- For these instructions, it is assumed that the old faucet has been completely removed and any necessary repairs or modifications to the water supply have been completed.

### TOOLS AND MATERIALS:



Plumbers  
Tape



Thread  
Sealant



Adjustable  
Wrench



Small  
Bucket



Phillips  
Screwdriver

For Warranty information, please visit: [signaturehardware.com/services/warranty](https://signaturehardware.com/services/warranty)

REVISED 06/30/2020  
CODES: 508626, 508625, 508624

# BRIDGE


## KITCHEN FAUCET

SKU: 907536, 913187


### INSTALLATION

1. Ensure that the water supply below your sink is completely shut off by turning the shutoff valves all the way to the right.


**Tip:** Place a small bucket below your workspace to catch any water that may drip during the installation process.

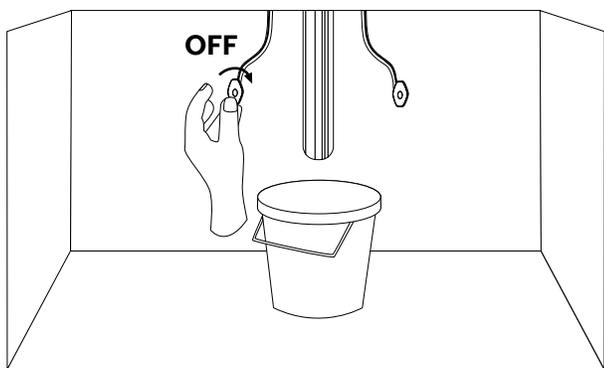


2. Attach the provided threaded shanks into the base of the faucet, as shown below. Insert the faucet into its prepared mounting location.

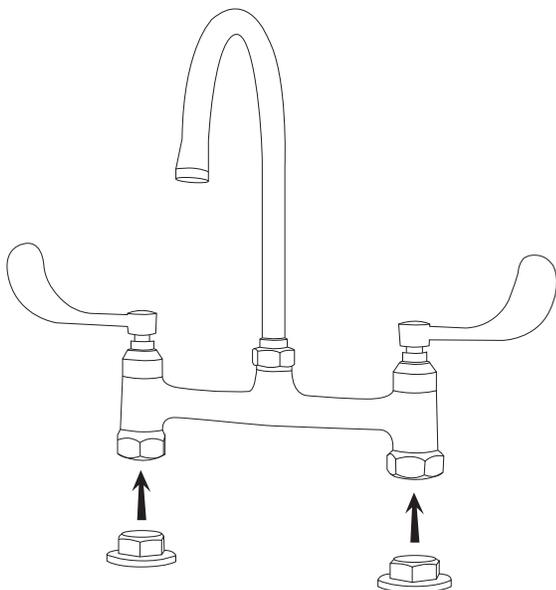

3. From below, slide the metal washers onto the threaded shanks. Thread the locknuts onto the shanks until hand-tight, then finish tightening using an adjustable wrench.

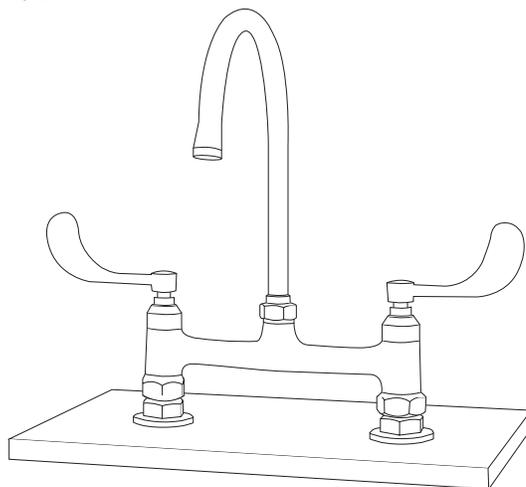

4. Remove the locknut and metal washer from the trim piece for the drain's rod. Insert the trim piece into the center faucet hole, then secure from below using the metal washer and locknut.

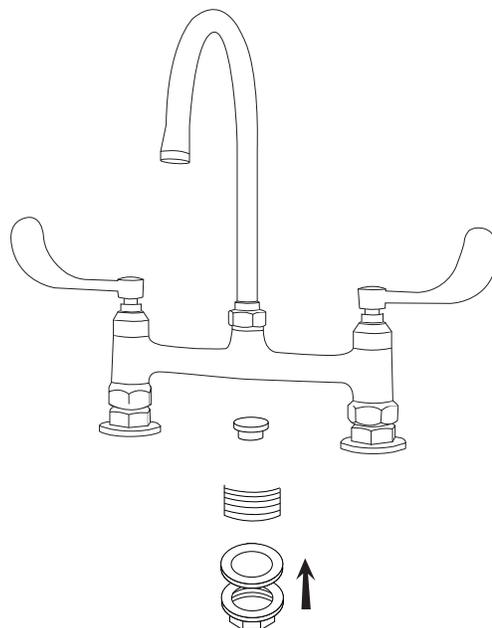


# BRIDGE


## KITCHEN FAUCET

SKU: 907536, 913187

5. Connect the main water supply lines to the faucet. Apply plumber's tape or thread sealant to the threads before tightening. Use an adjustable wrench to tighten, but be careful not to overtighten. Ensure that you are connecting the hot and cold lines appropriately.

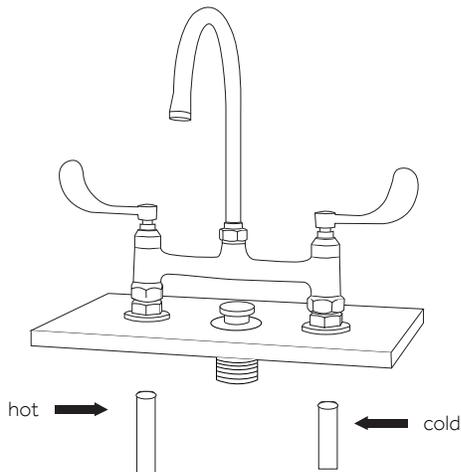

6. Once installation is complete, turn the main water supply back on from underneath your sink. Check for any leaks underneath.

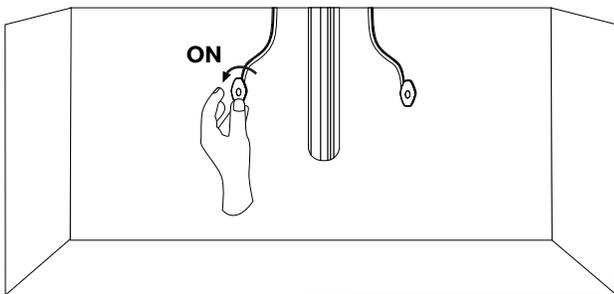

7. Proceed to the drain installation. Once completed, remove the aerator from the spout and turn the faucet on for approximately 60 seconds to remove any dust or loose sediment from the water lines. Ensure that there are no leaks, and that both hot and cold water are running properly. Turn the water off and reattach the aerator.




# BRIDGE


KITCHEN FAUCET

SKU: 907536, 913187


## DRAIN INSTALLATION

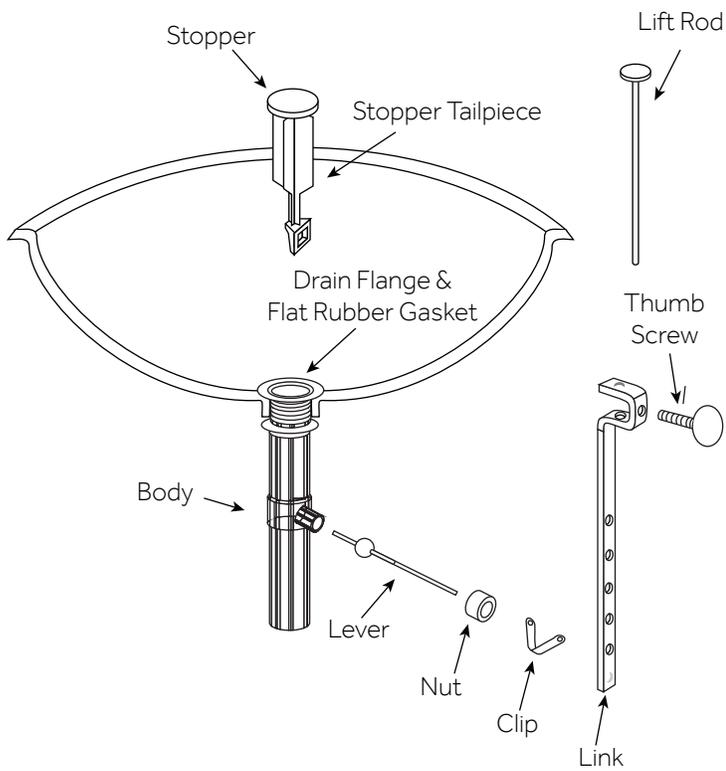

1. Remove the flange by unthreading it from the drain body. Remove the flat rubber gasket as well.

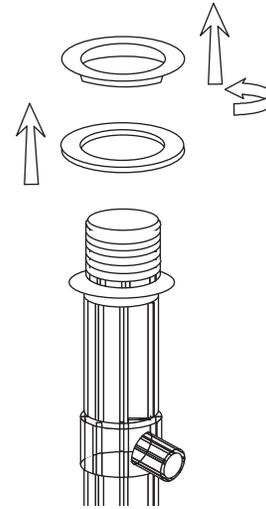

2. Set the flat rubber gasket over the drain hole in your sink, then insert the flange into the drain hole.

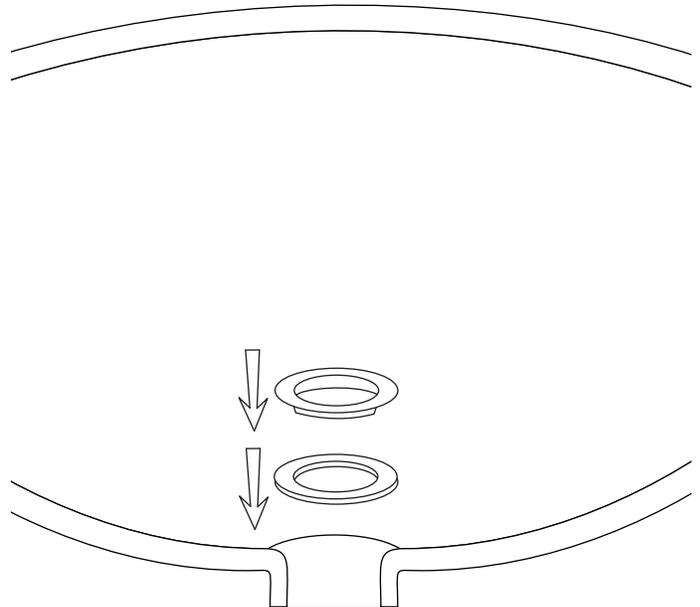


# BRIDGE


## KITCHEN FAUCET

SKU: 907536, 913187


3. From beneath the sink, reattach the flange by threading it back onto the drain body.

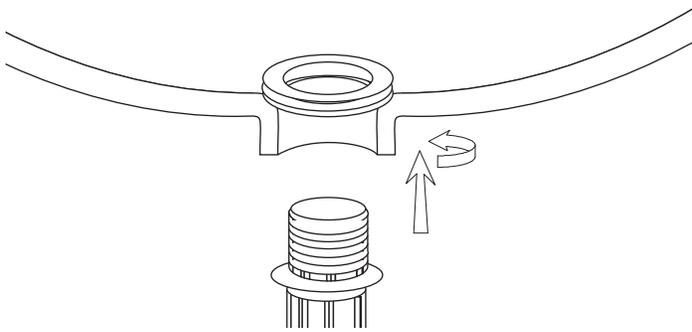


4. Connect the drain lever by threading it into the hole on the side of the drain body. The lever must pass through the hole in the stopper tailpiece to function properly. Apply a bit of thread sealant or plumber's tape to the threads before attaching.

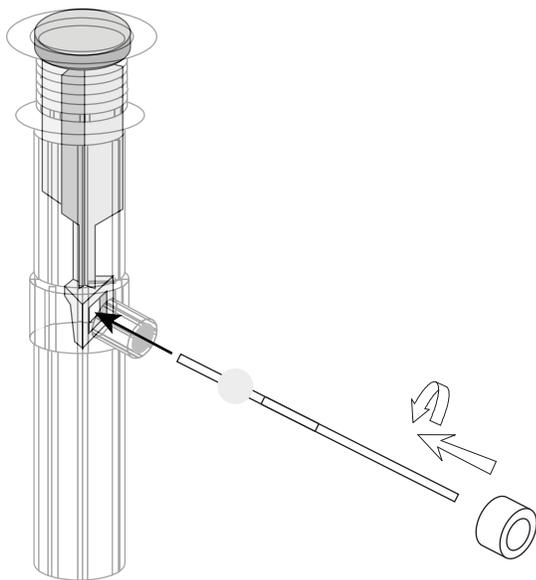

5. Position the drain so that the lever is facing the back of the fixture, in line with the faucet's lift rod. While holding in place, hand tighten the lock nut until secure then finish tightening with a basin wrench. Be careful not to overtighten, which can crack a fragile sink.

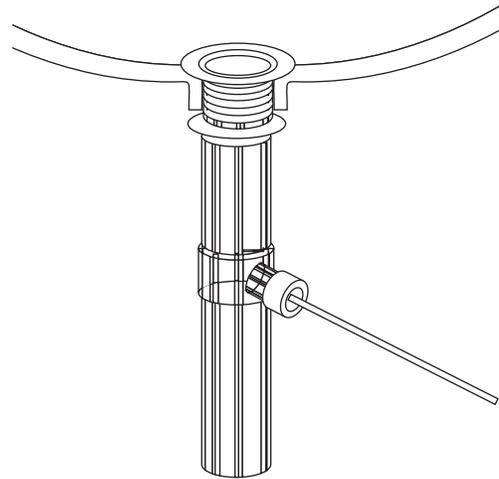

6. If not already installed, insert the faucet's lift rod into its designated hole on the back of the faucet.

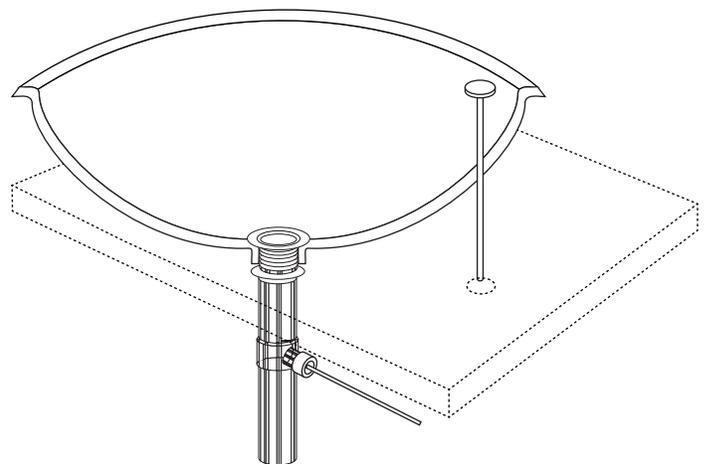


# BRIDGE


## KITCHEN FAUCET

SKU: 907536, 913187



7. Use the link to attach the faucet's lift rod to the drain lever. Pinch the metal clip located on the drain lever to remove. Slide one end of the clip back onto the lever, followed by the link, then the second end of the clip to secure.

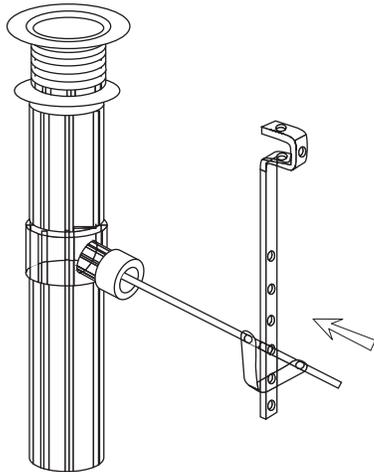

8. Attach the lift rod to the top of the link and secure it by tightening the thumb screw.

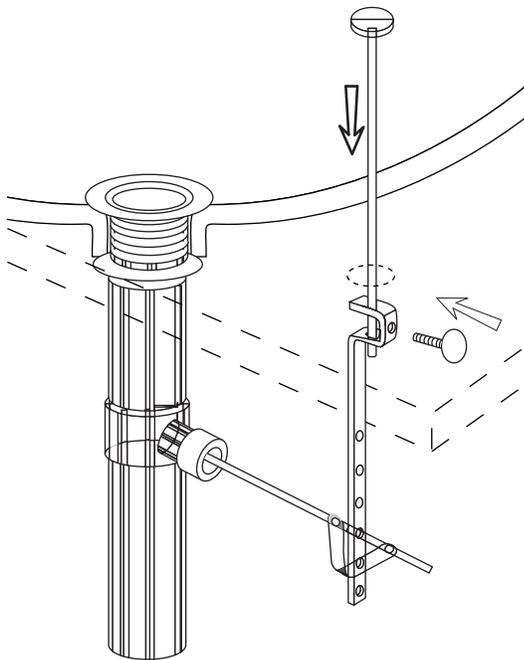

9. Make any final adjustments to the positioning of the link and drain lever as needed. Adjust until the drain fully opens and closes.

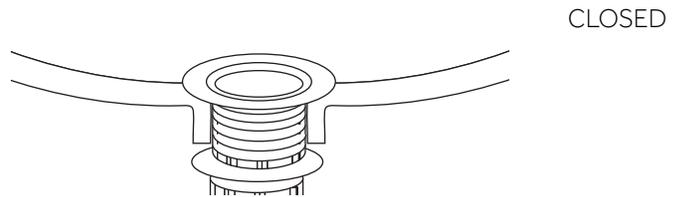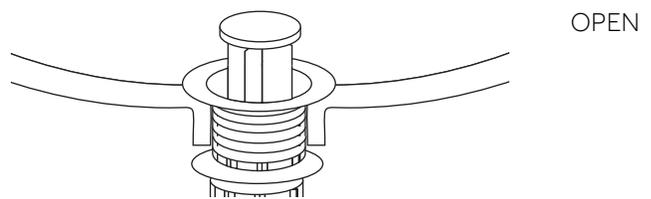

10. Fill your sink to check for any leaks and to ensure that the drain is functioning properly.

