



ROTUNDA WALL-MOUNT FAUCET

INSTALLATION INSTRUCTIONS

Before installing, read entire Rotunda Wall-Mount Faucet Installation Instructions. Observe all local building and safety codes.

For the following installation instructions for your new wall-mount faucet it is assumed that any old fixtures have been removed and the water supply lines have been relocated to the proper installation location.

Unpack and inspect the product for any shipping damages. If you find damages, do not install. Contact Customer Service at 1-866-855-2284. If you need assistance or have questions while installing your wall-mount faucet, contact Customer Service.

We recommend consulting a professional if you are unfamiliar with installing bathroom fixtures. Signature Hardware accepts no liability for any damage to the floor, walls, plumbing or for personal injury during installation.


TOOLS AND MATERIALS

Allen Wrench (provided)
Wood Screws

Drill
Silicone Sealant

Level

INSTALLATION DIAGRAM

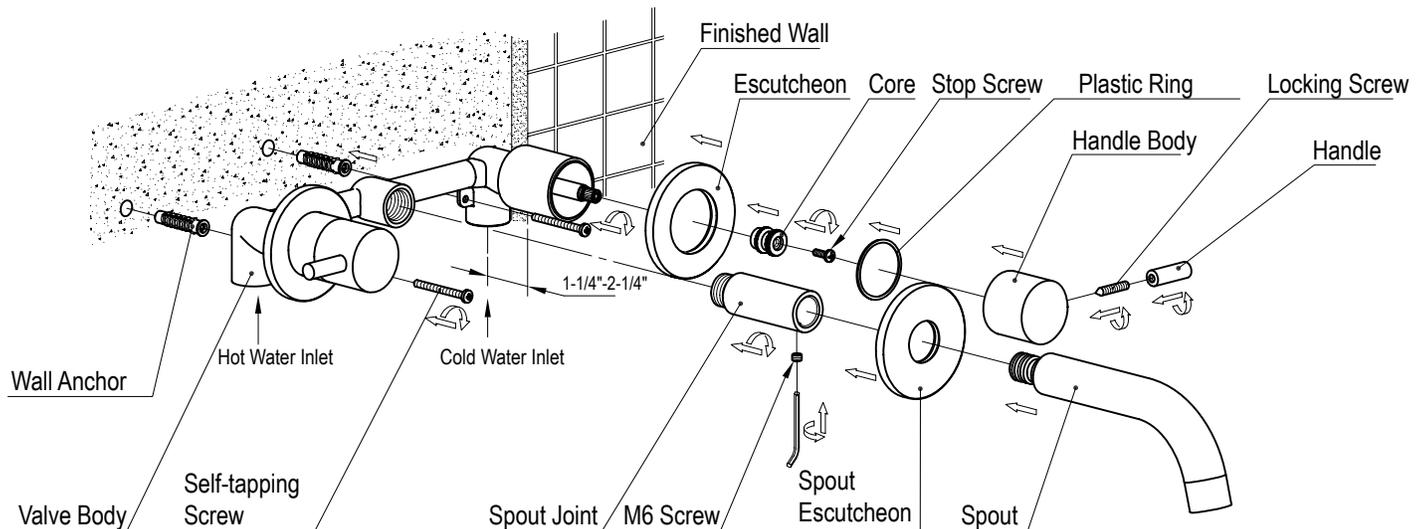



INSTALLATION

1. Remove the handle, locking screw, handle body, plastic spacing ring, stop screw and core from the faucet body. Put the plastic faucet protector on the faucet body.
2. Install the faucet body behind the finished wall in accordance with installation diagram. Wrap Teflon tape around the threaded connections and attach to the water supplies.
3. Plug the outlet on the faucet body and turn on the water supply to verify that there is no leakage.
4. Finish the wall or tile around the faucet body.
5. Wrap the Teflon tape around the spout joint and connect it with valve body. Push the spout escutcheon in place close to the wall, connect the spout, and tighten it with an M6 screw.
6. Remove the plastic faucet protector, and finish faucet assembly as specified in diagram.
7. When your faucet installation is complete, turn on the water supply. Check to make sure that all connections are tight (no water should be leaking) and that the hot and cold supplies are working correctly. Turn the water on and allow the water to flow through the spout for approximately 60 seconds. Allow any sealant to cure for 24 hours before use.