HIBISCUS THERMOSTATIC SHOWER SYSTEM WITH 3 BODY SPRAYS, SLIDE BAR AND HAND SHOWER

SKU: 953898 Code:

SHHB9009,SH6006,SHRSA120S,SHSH2080G,SHHS4080G,SHH1010,SHWE2020,SHHB9005,SH6103,SHHB9007,SH6040,SHSB3050,SHBS6040E



ASME A112.18.1/CSA B125.1 ASSE 1016 Type T ICC/ANSI A117.1 CEC Listed Massachusetts Accepted

LISTED ID: SHHB9009*, SH6006, SHRSA120S*, SHSH2080G*, SHHS4080G*, SHH1010*, SHWE2020*, SHHB9005*, SH6103, SHHB9007*, SH6040,









FEATURES

Installation Type: Wall

Features: Thermostatic, Hand Shower Included

Mounting Hardware Included: Yes

Assembly Required: No Handle Type: Lever

Body Spray Flow Rate: 2.5 gpm (9.5L/min) max @ 60 ps

NPT Connection: 1/2" Body Sprays: Yes

Shower Head Installation Type: Wall-Mount

Number of Shower Heads: 1

Shower Head Material: 304-Grade Stainless Steel

Shower Head Spray: Rainfall Shower Head Length: 11-3/4" Shower Head Width: 11-3/4" Shower Arm Included: Yes Shower Arm Extension: 12" Shower Arm Height: 2-3/8" Shower Head IPS: 1/2" Shower Head Swivel: Yes Valve Trim Width: 6-11/16" Valve Trim Height: 6-11/16"

Slide Bar Length: 30"

Hand Shower Length: 8-7/16" Hand Shower Hose Length: 60" Hand Shower Material: Brass

Hand Shower Flow Rate: 1.8 gpm (6.8 L/min) @ 80 psi

Diverter Included: Yes

Shower Head Flow Rate: 1.8 gpm (6.8 L/min) @ 80 psi

REVISED 7/19/2023

HIBISCUS THERMOSTATIC SHOWER SYSTEM WITH 3 BODY SPRAYS, SLIDE BAR AND HAND SHOWER

SKU: 953898 Code:

SHHB9009,SH6006,SHRSA120S,SHSH2080G,SHHS4080G,SHH1010,SHWE2020,SHHB9005,SH6103,SHHB9007,SH6040,SHSB3050,SHBS6040E




ADDITIONAL FEATURES


- Thermostatic technology keeps shower temperature within 1 degree Celsius.
- Temperature outlet factory calibrated to 104 degrees Fahrenheit and can be easily adjusted up or down to user's comfort level.
- Six total settings allow for shared water flow between outlets, giving you the ability to use two functions at once.
- Metal handles.
- Single function shower head (full spray) with easy-clean silicone nozzles.
- Single function hand shower.
- 60" 72" stretchable metal shower hose.
- Adjustable angle for hand shower mount.
- Body spray jet swivels with a 3-9/16" surface area.
- Body spray flow rate: 2.5 gpm (9.5L/min) max @ 80 psi.
- Must be installed in accordance with provided installation instructions.
- Recommended valve installation depth 1-5/8" to 2-3/8"
- Included Rough-in valves:
- Thermostatic rough-in valve features scald guard protection, high temperature limit stop, integral water stops and check valve, a ceramic cartridge, and a bronze valve body.
- Volume control rough-in valve features a ceramic disc cartridge and brass valve body.
- Diverter valve features a ceramic disc cartridge and brass valve body. An available Single-Function Diverter valve Cartridge restricts water flow to one outlet at a time.

REVISED 7/19/2023

VOLUME CONTROL ROUGH-IN VALVE

SKU: 948546 SH6020, SH6040

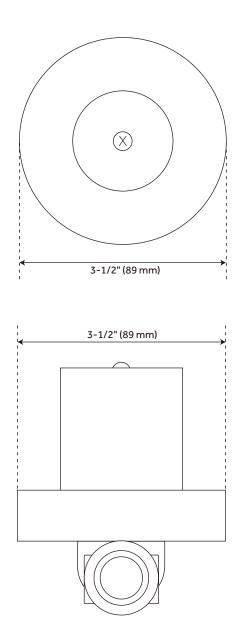


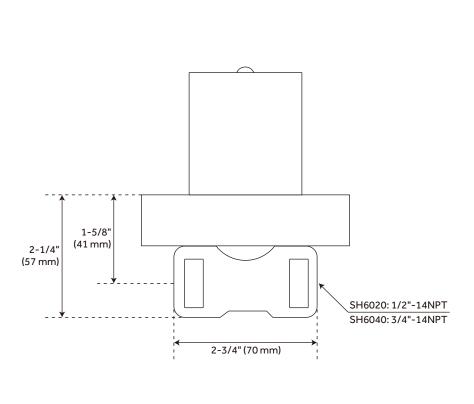

HIBISCUS IN-WALL SHOWER VOLUME CONTROL HANDLE


SKU: 948557

SHHB9007, SHHB9007Z

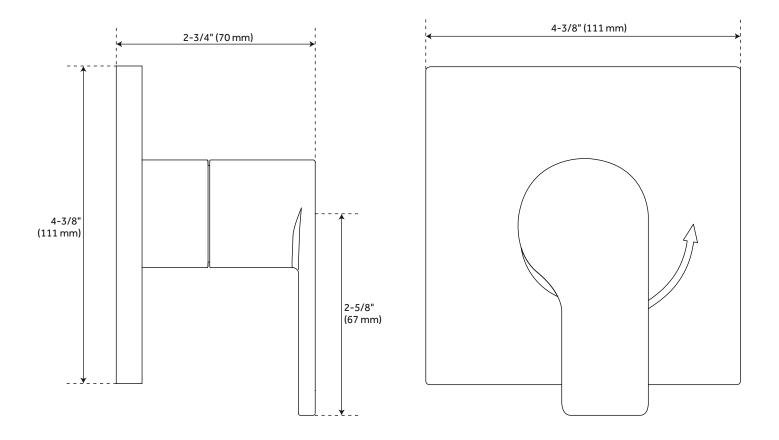

OPTIONAL VOLUME CONTROL ROUGH-IN VALVE WITH 1/2" -OR- 3/4" CONNECTION


SKU: 948557 SH6020, SH6040

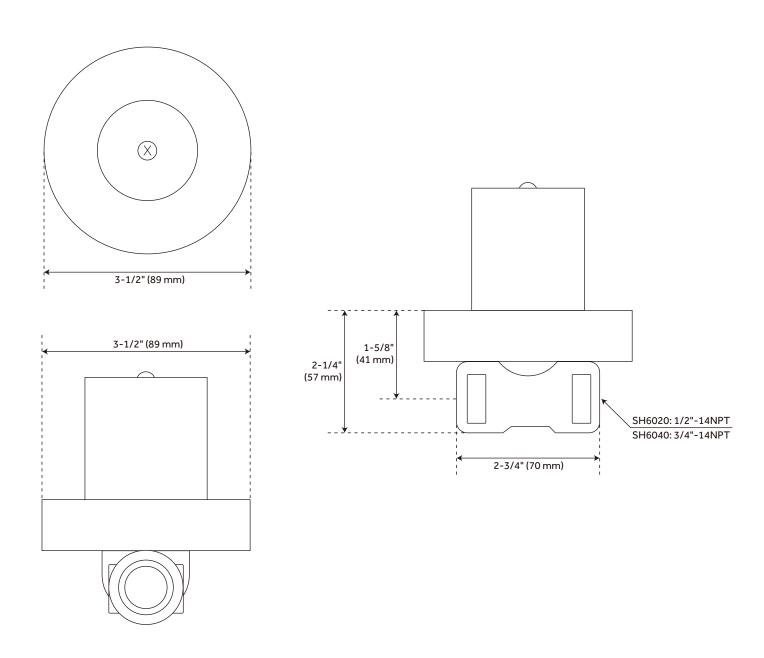

HIBISCUS THERMOSTATIC SHOWER VALVE


SKU: 948558


SHHB9009, SHHB9009Z

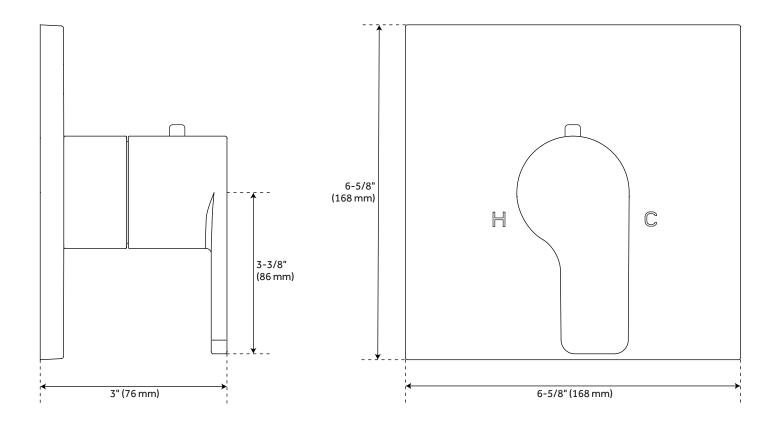

HIBISCUS OPTIONAL THERMOSTATIC VALVE WITH 1/2" -OR- 3/4" CONNECTION

SKU: 948558 SH6004, SH6006

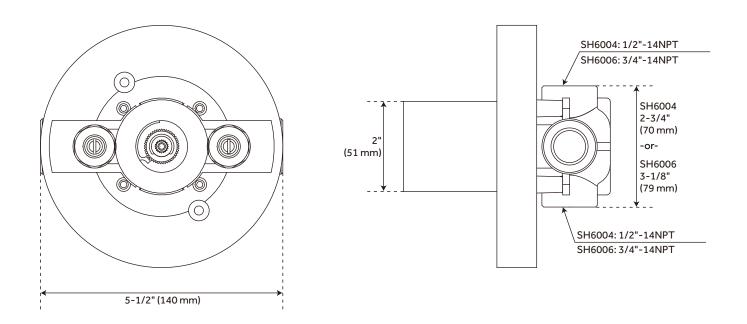


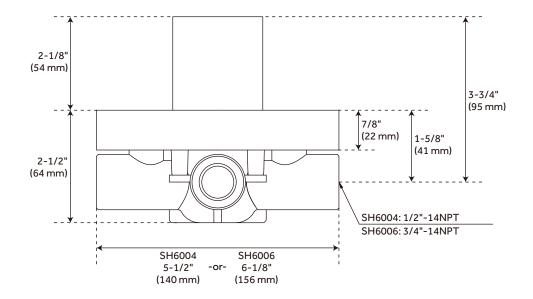

HIBISCUS IN-WALL SHOWER DIVERTER

SKU: 948902

SHHB9005, SHHB9005Z

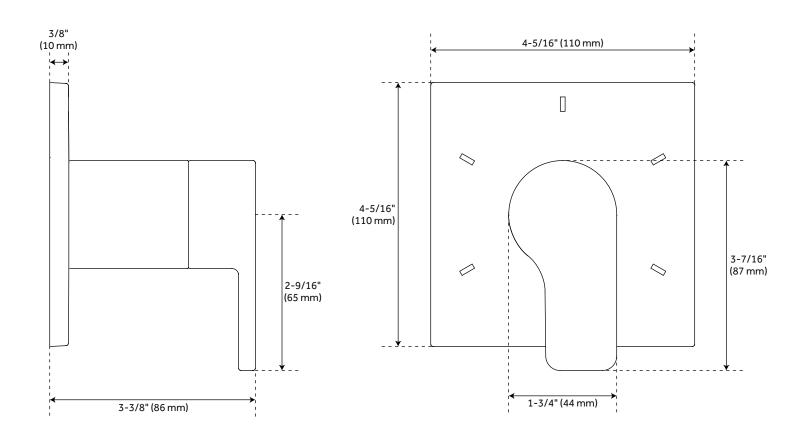




HIBISCUS OPTIONAL 3-WAY IN-WALL DIVERTER ROUGH-IN VALVE - 3/4"


SKU: 948902


SH6103

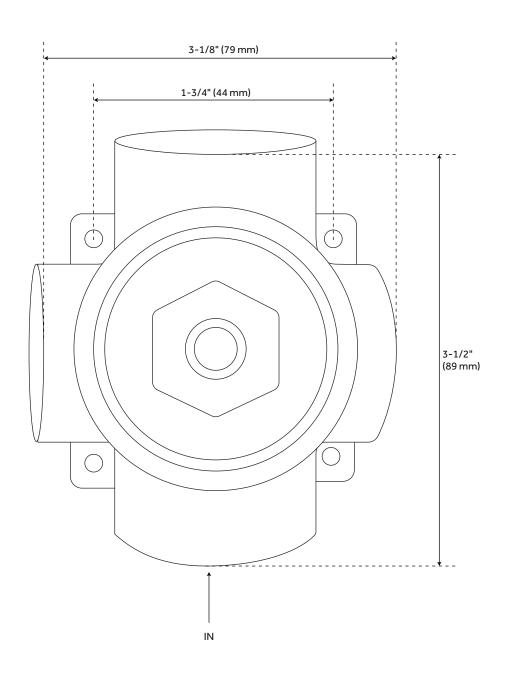

CONTEMPORARY SQUARE WATER SUPPLY ELBOW FOR HAND SHOWER


SKU: 948933 SHWE2020

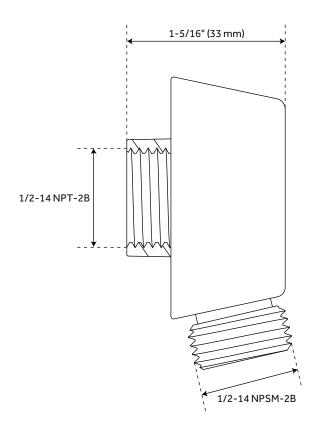


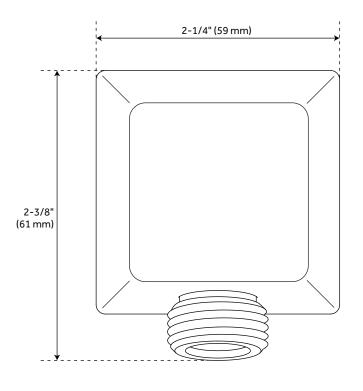

60" STRETCHABLE METAL HAND SHOWER HOSE

SKU: 948938 SHH1010

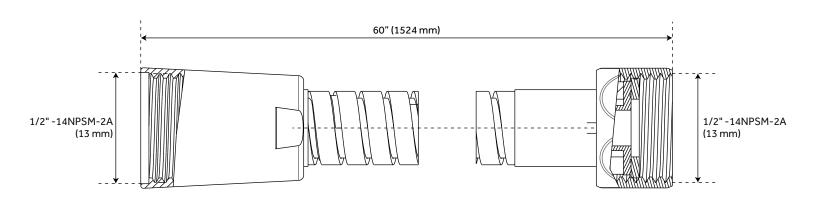




MODERN SQUARE WALL-MOUNT SHOWER ARM WITH FLANGE

SKU: 948956

SHRSA120S, SHRSA120SZ, SHRSA180S, SHRSA180Z

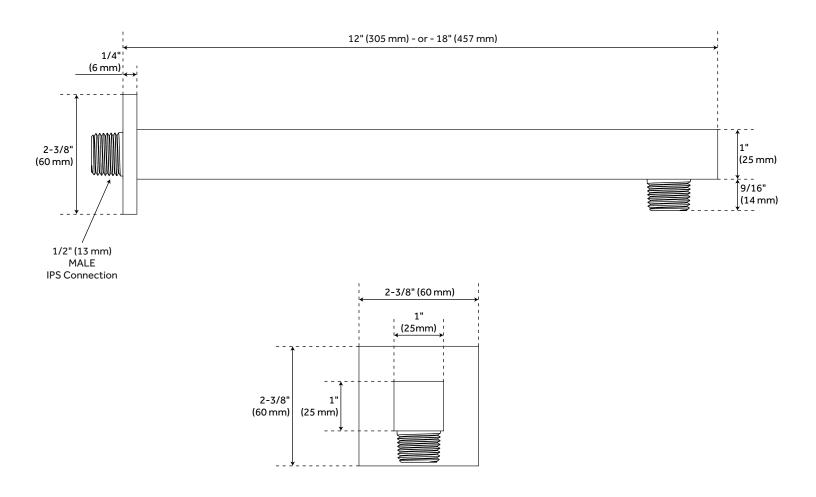

3-WAY IN-WALL DIVERTER ROUGH-IN VALVE

SKU: 953056 SH6101, SH6103

