

SIMPLY CONSERVE

9W LED PL LAMP (HORIZONTAL)

L9PL40G24QH, L9PL50G24QH



This plug-and-play lamp offers a simple and efficient lighting solution for task lighting. Its mercury-free, instant-on soft white light is ideal for brightly illuminating spaces without overpowering them. A 50,000-hour lifespan means less bulb replacement, and DLC certification guarantees energy and money savings.



POTENTIAL LIFETIME SAVINGS: 200 KWH/\$22*

**Compared to an 13W CFL, 3 hours per day, ~ \$0.11/Kwh*

PRODUCT FEATURES OVERVIEW



DAMP-RATED



MERCURY-FREE



INSTANT-ON/OFF



NON-DIMMABLE



5-YEAR LIMITED WARRANTY*

*AM Conservation Group, Inc. guarantees to the original purchaser or recipient of this lamp that it is free from defects in material and workmanship for five years from the date of purchase. Warranty is limited to repair or replacement of the lamp. Lamps being returned must include proof of purchase.

Rated Power (W):	9W
Color Temp (CCT):	4000K, 5000K
Typical Lumens (lm):	800 lm
Efficacy (lm/w):	88.8 lm/w
Beam Angle:	150°
Operation Temperature:	-4°F - 104°F
Storage Temperature:	-4°F - 104°F
Input Voltage (V):	120-277V
Power Factor:	> 0.9
THD:	20%
Ignition Time:	Instant-on
Line Frequency:	60 Hz
Dimmable:	No
Safety Certification:	ETL
DLC-Listed:	Yes
Base / Cap:	G24Q, GX24Q

Product Life: 50,000 Hrs

Target Replacement: 13W/5T4/G24Q

Direct Replacement/Ballast Compatible:

New or existing ballast is required for operation

- Shatter Resistant
- Mercury-Free
- Damp-Rated

9W LED PL LAMP (HORIZONTAL) | L9PL40G24QH, L9PL50G24QH

SPECIFICATIONS BY MODEL


ITEM #	VOLTAGE	WATTS	CCT	LUMENS	PF	CRI	LIFETIME	BEAM ANGLE	BASE	CERTIFICATIONS
L9PL40G24QH	120-277V	9W	4000K	800 lm	≥0.9	≥80	50,000 Hrs	150	G24Q, GX24Q	DLC Standard
L9PL50G24QH	120-277V	9W	5000K	800 lm	≥0.9	≥80	50,000 Hrs	150	G24Q, GX24Q	DLC Standard

MODEL SELECTION

FAMILY	WATTAGE	LAMP TYPE	BASE	CCT.	ORIENTATION
L = LED Linear	9 = 9W 12 = 12W	PL = PL Lamp	G24Q/GX24Q GX23-2 G24D	35 = 3500K 40 = 4000K 50 = 5000K	V = Vertical H = Horizontal


DIMENSIONS

PRODUCT

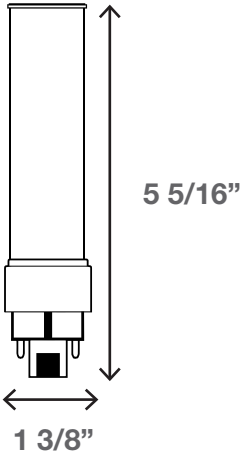

PACKAGING

Case

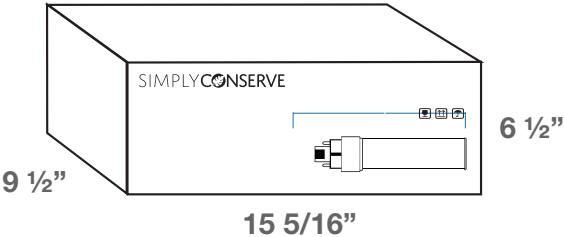

60/Master Case

Gross WT: 11 1/2 LBS

AM CONSERVATION GROUP//COMMERCIAL LIGHTING

9W LED PL LAMP (HORIZONTAL) | L9PL40G24QH, L9PL50G24QH

BALLAST COMPATIBILITY



✓	COMPATIBLE
✗	UN-COMPATIBLE
/	NOT TESTED

							1 LAMP		2 LAMP	
NO.	BRAND	PART #	VIN	START METHOD	# OF LAMPS	LAMP CONNECTION	120 VAC	277 VAC	120 VAC	277 VAC
1	Philips	ICF-2S18-H1-LD	120-277	RS	2	Parallel	✓	✓	✓	✓
2	Philips	ICF-2S26-H1-LD	120-277	RS	2	Parallel	✓	✓	✓	✓
3	Philips	ICF-2S42-M2-LD	120-277	RS	2	Parallel	✓	✓	✓	✓
4	Philips	REZ-1Q18-M2-BS	120	RS	1	N/A	✓	✓	/	/
6	Triad	Triad C213UNVME	120-277	RS	2	Parallel	✓	✓	✓	✓
7	Triad	Triad C218UNVME	120-277	RS	2	Parallel	✓	✓	✓	✓
8	Triad	Triad C2642UNVME	120-277	RS	2	Parallel	✓	✓	✓	✓
9	Osram	QTP 2*26CF/UNV DM	120-277	RS	2	Parallel	✓	✓	✓	✓
10	Hatch Lighting	HC226PS/UV/D	120-277	RS	2	Parallel	✓	✓	✓	✓
12	Energy Savings	ES-2/1-CFQ-18-UNV-C	120-277	RS	2	Parallel	✓	✓	✓	✓
14	Robertson	PSM 226CQMVDWCE(3P20145)	120-277	RS	2	Parallel	✓	✓	✓	✓
15	Howard	EP2/26CF/MV/2	120-277	RS	2	Parallel	✓	✓	✓	✓
16	Howard	EP2/42CF/MV/2	120-277	RS	2	Parallel	✓	✓	✓	✓
17	Sola	E-724-U-226-MI-S	120-277	PS	2	Parallel	✓	✓	✓	✓
18	Keystone	CAT.NO.KTEB-213-UV- RS-DW	120-277	PS	2	Parallel	✗	✗	✓	✓
19	Keystone	CAT.NO.KTEB-213-UV- PS-DW	120-277	RS	2	Parallel	✗	✗	✓	✓
20	Keystone	CAT.NO.KTEB-218-UV- RS-DW	120-277	RS	2	Parallel	✗	✗	✓	✓

AM CONSERVATION GROUP//COMMERCIAL LIGHTING

9W LED PL LAMP (HORIZONTAL) | L9PL40G24QH, L9PL50G24QH

							1 LAMP		2 LAMP	
NO.	BRAND	PART #	VIN	START METHOD	# OF LAMPS	LAMP CONNECTION	120 VAC	277 VAC	120 VAC	277 VAC
21	Keystone	CAT.NO.KTEB-218-UV-PS-DW	120-277	RS	2	Parallel	✗	✗	✓	✓
22	Keystone	CAT.NO.KTEB-226-UV-RS-DW	120-277	RS	2	Parallel	✗	✗	✓	✓
25	Keystone	CAT.NO.KTEB-226-UV-PS-DW	120-277	RS	2	Parallel	✗	✗	✓	✓
26	Keystone	CAT.NO.KTEB-242-UV-RS-DW	120-277	RS	2	Parallel	✗	✗	✓	✓
27	Keystone	CAT.NO.KTEB-242-UV-PS-DW	120-277	RS	2	Parallel	✗	✗	✓	✓