

MICROPlumb® PRODUCTS Electronic Prison Flushometer

ROYAL 601-ESM



► Description

Concealed electronic operated water closet flushometer, for stainless steel combination fixtures. For use with: Acorn®, Bradley®, Metcraft® (Series 3000), Willoughby® and similar fixtures.

► Flush Cycle


- Model 601 ESM Water Saver (3.5 gpf/13.2 Lpf)
- Model 601 ESM-1.6 Low Consumption (1.6 gpf/6.0 Lpf)

► Specifications

- Concealed electronic operated, diaphragm type, rough brass closet flushometer
- 24 VAC 50/60 Hz solenoid operator
- 15' cord w/RJ-11 connection
- Dual filtered bypass diaphragm
- Diaphragm, stop seat and vacuum breaker sack made from Permex™ rubber compound for chloramines resistance
- 1 I.P.S. Wheel handle Bak-Check™ angle stop
- Adjustable tailpiece
- High back pressure vacuum breaker
- Elbow flush connection and coupling for 1 1/2" NPT back inlet (for connection in pipe chase—flush tube through wall not provided by Programmed Water Technologies)
- Sweat solder adapter

► Wall Thickness

Specify wall thickness for proper length of flush connection for china fixtures. A 3-1/4" flush connection is supplied for stainless steel fixtures.

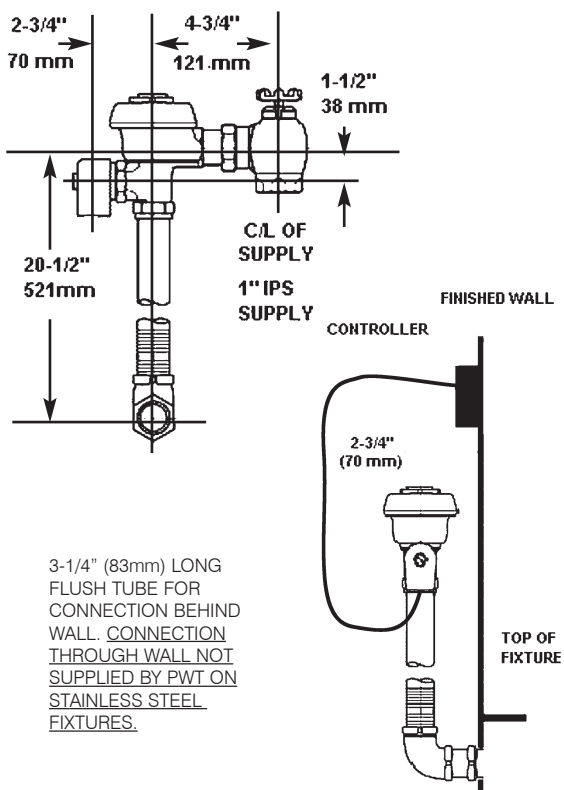

This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.



10500 Seymour Avenue • Franklin Park, Illinois, 60131-1259
Phone 800-671-6970 • Fax 847-671-6944