

Act-O-Matic® Shower Head

AC-51-2.0



► Description

Act-O-Matic®, Chrome Plated, Self-cleaning Shower Head.

► Flow Rate

□ 2.0 gpm/7.5 Lpm maximum

► Specifications

Act-O-Matic®, Chrome Plated Shower Head with the following features:

- Spring loaded, Self-cleaning Spray Disk to prevent particle clogging
- Saves up to 20% or more water depending on length of shower
- "Cone-within-a-cone" Spray Pattern for total body coverage
- Fast drain feature to prevent residual slow dripping
- Pressure Compensating 2.0 gpm/7.5 Lpm Flow Control
- All Brass Construction
- Universal Ball Joint
- ½" I.P.S. Inlet

Shower Head shall be in conformance to all requirements of ANSI/ASME Standard A112.18.1M, CSA B-125 and the United States Federal Energy Policy Act.

► Finishes

□ **PB** Polished Brass


□ **BN** Brushed Nickel

□ **SF** Satin Finish

Note: Shower Head Available with ½" Whitworth Thread (please specify).

See Accessories Section of the Sloan Catalog for details on these and other Shower Head variations.

½" (DN 15 mm) NPT

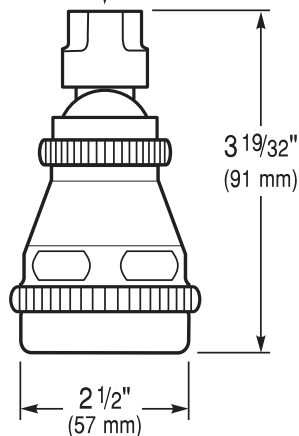

This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.

SLOAN®



Made in the U.S.A.

SLOAN VALVE COMPANY • 10500 SEYMOUR AVE. • FRANKLIN PARK, IL. 60131

Ph: 1-800-9-VALVE-9 or 1-847-671-4300 • Fax: 1-800-447-8329 or 1-847-671-4380

www.sloanvalve.com