MCR-224

MICRO Plumb® PRODUCTS
Push Button Shower Control

Description
Push button-activated shower control for single pre-mixed shower. System includes five components: MCR-115-A, EL-154, MCR-139-A, ETF-458-A and AC-450; plus five push button options: MCR-140-A, MCR-60-A, MCR-231-D, MCR-183-A and MCR-184-A.

Specifications
• Operates on 24 VAC
• Adjustable run time
• Waterproof module
• RJ-11 six position, four pin connections for push button connections
• Visible LED target detection
• 24 VAC brass body solenoid with integral "Y" strainer
• Diagnostic LED indicators in control module
• AC-450 Act-O-Matic® self-cleaning institutional-style shower head

Options (one required) – Sold separately
• MCR-140-A Waterproof Ever Switch Push Button with 15' cord
• MCR-60-A Thru-wall Push Button Sensor Assembly with 15'cord
• MCR-231-D Waterproof D-Slot Push Button with 15' cord
• MCR-183-A Waterproof Push Button with 15' cord
• MCR-184-A Waterproof Thru-wall Push Button with 15' cord


MCR-139-A
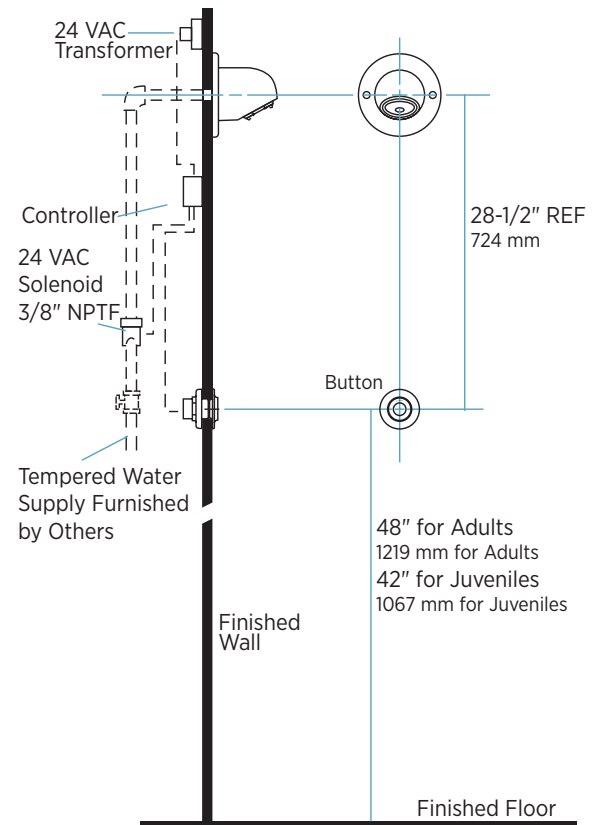

AC-450

MCR-115-A

ETF-458-A

EL-154

Push Button Shower Systems

24 VAC Transformer

Controller

24 VAC Solenoid 3/8" NPTF

Tempered Water Supply Furnished by Others

Finished Wall

28-1/2" REF 724 mm

Button

48" for Adults
1219 mm for Adults
42" for Juveniles
1067 mm for Juveniles

Finished Floor

The information contained in this document is subject to change without notice.

MCR-224 07-14