

Sloan Standard Urinal Model HYB-1000

Code Number

1001020

Description

Complete Vitreous China Hybrid Urinal with automatic drain rinse.

Flush Cycle Waterfree operation

waleniee operation

- Specifications
- Urinal Assembly
- Complete mounting kit included
- Jetrinse[™] Assembly
- Patented housing and drain line rinsing

- Automatic activation injects 1 gallon of water through housing and drain line every 72 hours to prevent struvite build-up and clogs

- IR switch for manual rinse activation
- Long life lithium battery provides at least 8 years of service
- Cartridge Assembly*

- Enhance patented design maximizes operational life, prevents accidental sealant loss and virtually eliminates odor

- Biodegradable sealant liquid

- Vandal resistant locking design
- 20% less plastic than previous designs
- Provides average of 7,000 uses that saves up to 40,000 gallons of water each year
- * Replacement cartridges sold separately

Features

- Patented drain rinsing assembly
- Minimizes cleaning effort
- Virtually eliminates odor
- Touch-free hygenic operation
- Earns maximum LEED credits
- Up to 5 times cleaner than conventional flush urinals
- Best in class odor control



IMPORTANT-Do not install on copper DWV due to copper's susceptibility to corrosion.

Compliance & Certifications

IAPMO certified to the applicable requirements in the following standards

ASME A112.19.2./CSA B45.1

ASME A112.1.3





This space for Architect/Engineer Approval





Housing and Jetrinse[™] Assembly

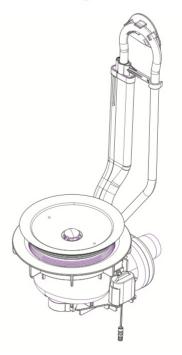

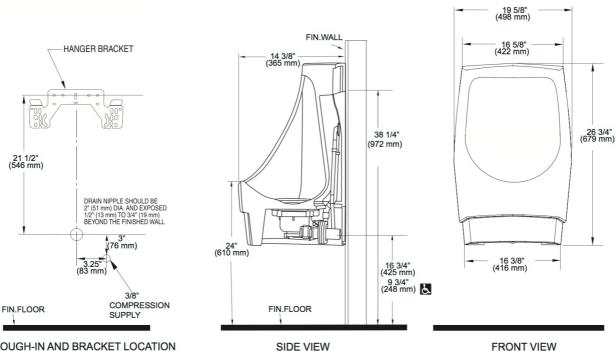

ROUGH-IN AND BRACKET LOCATION NOTE: All vitreous china dimensions shown in these drawings are nominal. Dimensions can vary within the tolerances established in the governing ASME A112.19.2/CSA B45.1 standard. Please take this into consideration when planning rough-in and plumbing layouts.