

► **Code Number**

3915522

► **Description**

Concealed hydraulically activated urinal flushometer, for 3/4" rear spud high efficiency urinals.

► **Flush Cycle**

0.125 gpf/0.5 Lpf

► **Specifications**

Quiet, Concealed, Diaphragm Type, Rough Brass Urinal Flushometer for either left or right hand supply with the following features:

- ADA Compliant Non-Hold-Open feature type Actuator (not included, order separately-specify Actuator type listed below)
- Chrome Plated Exposed Flushometer Parts
- Elbow Flush Connection and Spud Coupling for 3/4" Concealed Back Spud
- ADA Compliant Non-Hold-Open Actuator
- PERMEX® Synthetic Rubber Diaphragm with Dual Linear Filtered Bypass
- Flush accuracy controlled by CID® technology

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

- 3/4" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- Diaphragm, Stop Seat and Vacuum Breaker to be molded from PERMEX® rubber compound for Chloramine resistance

► **L Dimension**


Specify the "L" Dimension for the proper length of the Handle Assembly and Flush Connection. The "L" Dimension is equal to the Wall Thickness (to the nearest whole inch) plus 2 3/4" (70 mm).

► **Actuator Types: (not included-order separately-please check one)**

- MBPM - Metal Button Panel Mount (HY-108-A)
- MP - Metal Partition Actuator (HY-49-A)
- SW - Side Wall Mounted Actuator (HY-72-A)
- MBFW - Metal Button Fixture Wall Actuator (HY-100-A) (rear access required)
- See Actuator Specification pages for details on Actuators.
- Fixture Wall Actuator (HY-33-A) (rear access required)

► **Accessories (Sold Separately)**

See Accessories Section of the Sloan catalog for available accessories

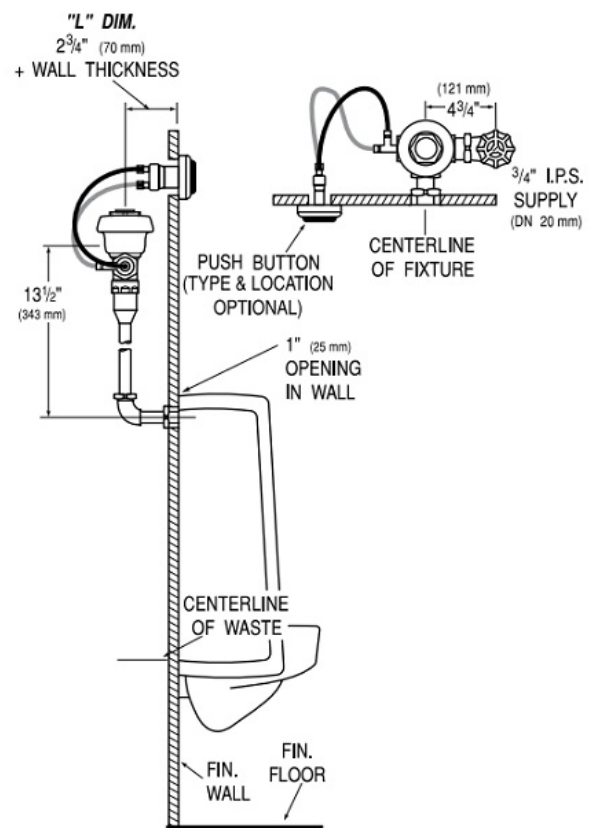

► **Compliance & Certifications**



This space for Architect/Engineer Approval