


# Dolphin® Model Flushometer

# Type II Class B Rigid Installation

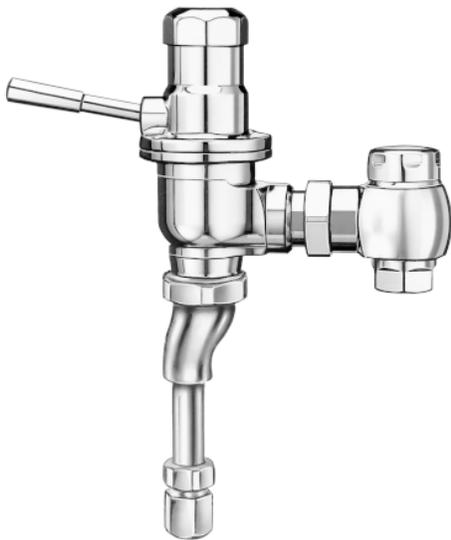

### ► Description

Exposed Water Urinal Flushometer. Specifically engineered for salt water and severe water conditions. Meets U.S. Navy Bureau of Ships Specifications.

### ► Flush Cycle

Model Type II—Class B Rigid Installation (factory set at 1.0 gpf/5.7 Lpf)  
Valve Adjustment Range: 0.25 gpf/0.9 Lpf to 12.0 gpf/45.4 Lpf  
Factory settings made at 40 psi (275 kPa) - flush volume will vary with pressure and flow rate

### ► Specifications

Quiet, Exposed, Chrome Plated Urinal Flushometer with the following features:


- Metal Lever Handle
- 3/4" I.P.S. Screwdriver Bak-Chek™ Angle Stop with 1/2" Inlet Adapter
- Vandal Resistant Stop Cap
- Ground Joint Tailpiece
- 3/4" Flush Connection with 1/2" Offset and 3/4" x 1/2" Reducer for 1/2" Spud
- Flushometer does not require water pressure to positively shut off

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037, ANSI/ASME 112.19.6, and Military Specification V-29193. Valve conforms with Military Specification MIL-V-0015020F (Ships).

### ► Variations

- 1/2" Sil-braze Inlet Adapter

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

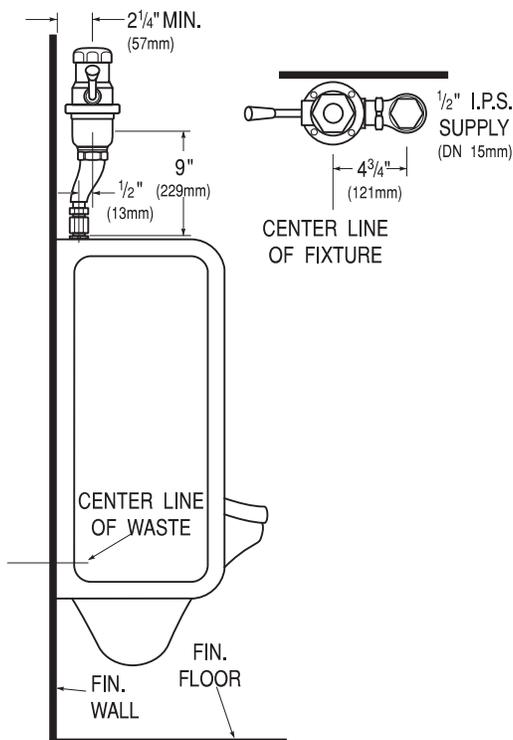

This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.

Made in the U.S.A.

# SLOAN®

SLOAN VALVE COMPANY • 10500 SEYMOUR AVE. • FRANKLIN PARK, IL 60131  
PHONE: 1-800 982-5839 • FAX: 1-800 447-8329 • <http://www.sloanvalve.com>