


Description

The Gen2 Guidelight is an outlet cover plate with integrated LED illumination that is specifically designed to be used with standard duplex and decor outlets. The Guidelight can be quickly installed over existing outlets by replacing the existing cover plate with the Guidelight. No modification to the wiring of the existing outlet is necessary. The Guidelight does not affect the outlet operation.

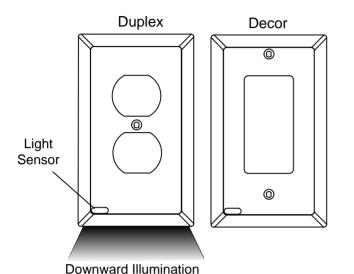

Features


- Quick Installation without wires or batteries, electrical contacts extending from the Guidelight extract power from screw terminals on the outlet body
- Two styles (Duplex and Décor) fits over all standard outlets and is available in white, light almond, ivory, and black.
- 4000K LED illuminated bar provides a uniform sheet of light from bottom edge of the Guidelight to provide path lighting without shining in a user's eyes.
- Light sensor automatically turns the LEDs on to the selected light level when the room is dark
- Low power consumption provides extremely cost effective illumination
- Nationally Recognized Testing Laboratory (NRTL) certified product

| Optical Performance |
|----------------------------|
|----------------------------|

| Parameter | Min. | Тур. | Max. | Units |
|---------------------------------------|------|------|------|---------------------------|
| Turn On Threshold (Incandescent Bulb) | 1 | 3 | 5 | lux at light sensor |
| Brightness (BRIGHT) | 20 | 23 | 26 | lux at 3" below light bar |
| Lumens on Bright (BRIGHT) | | 1.25 | | lumens |

Electrical Performance

| Parameter | Min. | Тур. | Max. | Units |
|---------------------------------|------|------|------|--------------------|
| Input Voltage (AC Volts) | 30 | 120 | 277 | AC Volts |
| Power draw' (illuminated) | | .024 | | watts |
| Power consumption (illuminated) | | .20 | | kW hr/year (\$.02) |



Measured 18" below bottom of the Guidelight (floor level)

