




2785.25

2786.25

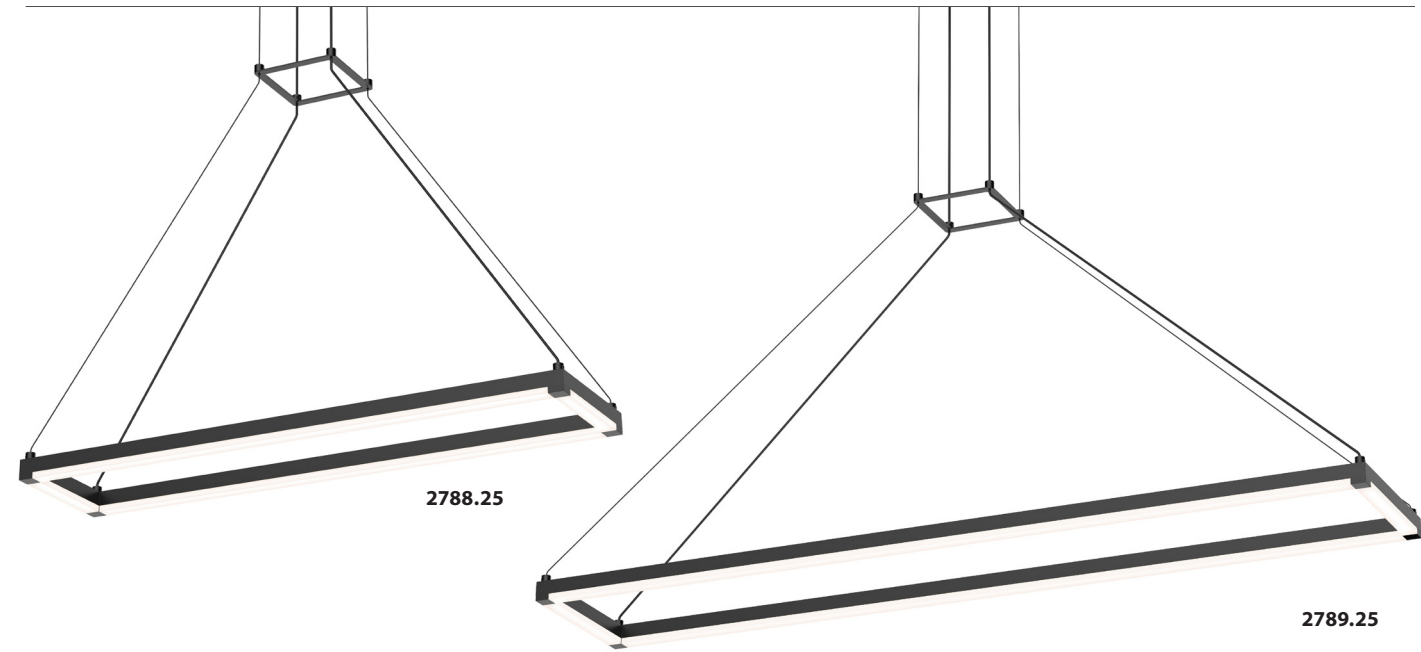

2788.25

2789.25

# stix rectangle

# stix square

**2785**  
**Stix Square 9" LED Pendant**  
 1 1/2" H x 9 1/4" W x 9 1/4" D  
 Shade: Optical Acrylic  
 Canopy: 6" sq w/6' Adjustable Cable  
 LED: 11w, 880 Lumens  
 Warm White (3000K), 90 CRI  
 100-277VAC Input w/LED Driver in Canopy  
 Dimmable by Electronic Low Voltage (ELV) or  
 Standard (TRIAC) Incandescent  
**2785.16** Bright Satin Aluminum  
**2785.25** Satin Black

**2786**  
**Stix Square 19" LED Pendant**  
 1 1/2" H x 18 1/2" W x 18 1/2" D  
 Shade: Optical Acrylic  
 Canopy: 6" sq w/6' Adjustable Cable  
 LED: 25w, 2000 Lumens  
 Warm White (3000K), 90 CRI  
 100-277VAC Input w/LED Driver in Canopy  
 Dimmable by Electronic Low Voltage (ELV) and  
 Standard (TRIAC) Incandescent at 120VAC, or  
 0-10V  
**2786.16** Bright Satin Aluminum  
**2786.25** Satin Black

**2787**  
**Stix Square 24" LED Pendant**  
 1 1/2" H x 24 1/4" W x 24 1/4" D  
 Shade: Optical Acrylic  
 Canopy: 6" sq w/6' Adjustable Cable  
 LED: 33w, 2640 Lumens  
 Warm White (3000K), 90 CRI  
 100-277VAC Input w/LED Driver in Canopy  
 Dimmable by Electronic Low Voltage (ELV) and  
 Standard (TRIAC) Incandescent at 120VAC, or  
 0-10V  
**2787.16** Bright Satin Aluminum  
**2787.25** Satin Black

**2788**  
**Stix Rectangle 30" x 6" Rectangle LED Pendant**  
 1 1/2" H x 30" W x 7 1/4" D  
 Shade: Optical Acrylic  
 Canopy: 6" sq w/6' Adjustable Cable  
 LED: 25w, 2000 Lumens  
 Warm White (3000K), 90 CRI  
 100-277VAC Input w/LED Driver in Canopy  
 Dimmable by Electronic Low Voltage (ELV) and  
 Standard (TRIAC) Incandescent at 120VAC, or  
 0-10V  
**2788.16** Bright Satin Aluminum  
**2788.25** Satin Black

**2789**  
**Stix Rectangle 47" x 9" Rectangle LED Pendant**  
 1 1/2" H x 47" W x 9 1/4" D  
 Shade: Optical Acrylic  
 Canopy: 6" sq w/6' Adjustable Cable  
 LED: 38w, 3040 Lumens  
 Warm White (3000K), 90 CRI  
 100-277VAC Input w/LED Driver in Canopy  
 Dimmable by Electronic Low Voltage (ELV) and  
 Standard (TRIAC) Incandescent at 120VAC, or  
 0-10V  
**2789.16** Bright Satin Aluminum  
**2789.25** Satin Black