

HINGE OPEN

1/4 IF EXCEEDED DOOR MAY NOT OPEN


⑧ NOT SHOWN

7/32 DIA. HOLE WITH
13/32 DIA. x 82° C'SINK

3/8 DOOR CLEARANCE

THE 1-21/32" DEPTH PROVIDES 1/16" CLEARANCE IN BOTTOM OF MORTISE
 #10 x 1-1/2" WOOD SCREWS SUPPLIED
 #10-24 X 1" MACH. SCREWS SPEC. ORDER
 MIN. WOOD THICKNESS IS 1-3/4 INCHES
 DO NOT SCALE DRAWING
 DOOR CLEARANCE REDUCES TO 1/64" WHILE CLOSING
 SEE DWG# 4477-C IF ADDING MATERIAL TO DOOR FACE

NO.	QTY.	PART NAME	MATERIAL
1	1	RIVET PIN	STEEL
2	2	LONG PIN	STEEL
3	12	LINK	STEEL
4	2	CHANNEL PIN	STEEL
5	2	BODY	ZINC
6	2	LONG ROLLER	NYLON 6/6
7	2	SPACER	NYLON 6/6
8	2	SHORT ROLLER	NYLON 6/6
9	8	LINK	NYLON 6/6

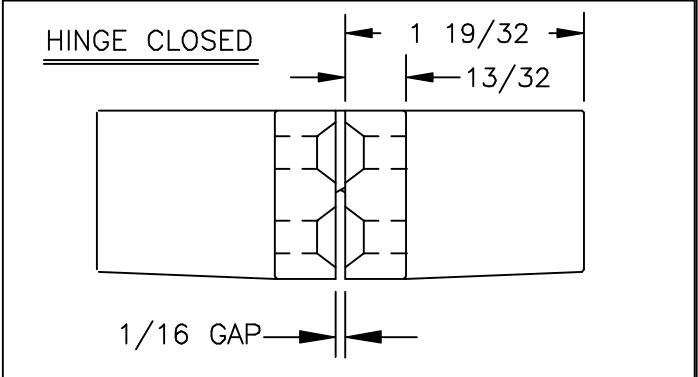

<p>UIP ©Copyright 1998 Universal Industrial Products Co. Inc. One Coreway Drive Pioneer, Ohio 43554-0628</p>	<p>SCALE: NOT TO SCALE</p>
	<p>DRAWN BY: R. SEIGNEUR</p>
<p>HINGE TEMPLATE</p>	<p>DATE: 4/8/98</p>
<p># 218 SOSS INVISIBLE HINGE</p>	<p>DRAWING # 3964-C</p>