SPEAKMAN® S-9200-CA-E S-9210-CA-E S-9220-CA-E S-9211-CA-E S-9221-CA-E

Sensorflo® AC Powered Lavatory Faucet

MODELS:

- □ S-9200-CA-E: Gooseneck faucet.
- □ S-9201-CA-E: Gooseneck faucet, under counter mechanical mixer with built-in backflow check valves.
- □ S-9210-CA-E: Gooseneck faucet with 4 in. deck plate.
- □ S-9211-CA-E: Gooseneck faucet with 4 in. deck plate, under counter mechanical mixer with built-in backflow check valves.
- □ S-9220-CA-E: Gooseneck faucet with 8 in. deck plate.
- □ S-9221-CA-E: Gooseneck faucet with 8 in. deck plate, under counter mechanical mixer with built-in backflow check valves.

FEATURES:

- Brass housing and brass spout.
- · Solenoid with built-in filter.
- UL/CSA approved transformer 120 VAC to 12 VDC with waterproof connectors.
- 120-second time out feature.
- · Lead-free construction.
- Water conserving vandal-resistant flow control reduces flow to 0.5 gpm (1.89 L/min).
- NOTE: stainless steel flexible supply hose(s), 3/8 in. compression, to supply stop(s) not included, see add-ons below.

COMPLIANCE:

- ASME A112.18.1/CSA B125.1 certified
- NSF 61 certified
- NSF 372 certified

FINISH:



PC

ADD-ONS:

- 0.5 gpm Boca spray outlet & 1.5 gpm laminar flow outlet kit
- Two (2) stainless steel flexible supply hoses to supply stops
- One (1) stainless steel hose for tempered water systems (S-9210, 9200, 9220 only)
- Under counter thermostatic mixing valve (S-9210, 9200, 9220 only)
- Tee with integral check valves (S-9210, 9200, 9220 only)
- 1.2 gpm laminar flow outlet
- 1.2 gpm aerator

OPTION: Add suffix to model

Less transformer

WARRANTY:

- ☐ A-BOLF
- □ A-HS
- □ -HTS
- □ A-TMV
- ☐ A-TEE
- ☐ A-ELF
- □ A-EA12

☐ -LT














F: 800-977-2747

W: WWW.SPEAKMAN.COM




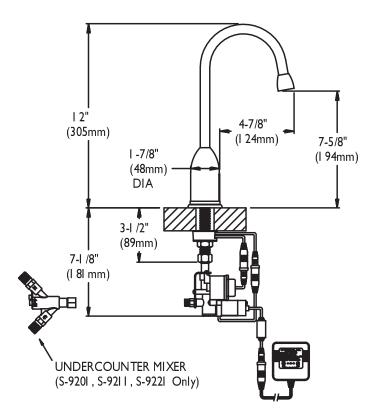


S-9200-CA-E S-9201-CA-E



S-9210-CA-E S-9211-CA-E



S-9220-CA-E S-9221-CA-E



R: OCTOBER 2017

F: 800-977-2747

W: WWW.SPEAKMAN.COM