SPEAKMAN® SC-7122-E

Commander® Double Handle Laboratory Gooseneck Faucet

FEATURES:

- Polished chrome plated brass deck mounted faucet
- ½ in. NPSM inlets with coupling nuts
- Accomodates installations up to 2 1/4 in. thick
- 5-1/4" deep gooseneck spout, rigid or swivel
- Vandal-resistant flow control non-aerated outlet reduces flow to 0.5 gpm (1.89 L/min).

COMPLIANCE:

- ASME A112.18.1/CSA B125.1 certified
- NSF/ANSI 61 certified
- NSF 372 certified

FINISH:





- Cross handle kit
- 4 in. wrist blade handle kit
- 1.2 gpm faucet aerator
- 1.2 gpm faucet laminar flow control outlet
- 0.35 gpm flow control non-aerated outlet

WARRANTY:

• 5 Year Limited








☐ A-ELF

□ A-FC35



DIMENSIONS: NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

2. All inlets are sized for coupling connections.

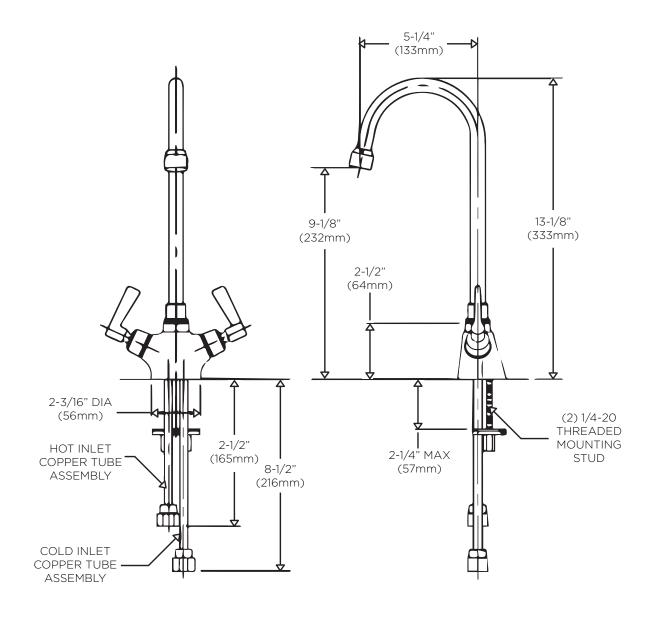

F: 800-977-2747