

SPEAKMAN® SEF-1800-CA-SL

Eyesaver® Single Lever Faucet with Integrated Eyewash

EYEWASH FEATURES:

- Pull handle activator.
- Aerated yellow plastic spray outlets with flip-top dust caps.
- 2.8 gpm/10.6L/min @ 30 psi flow rate.
- ½ NPT male inlet.

FAUCET FEATURES:

- Gooseneck faucet with independently operated eyewash.
- Lead-free brass construction.
- Ceramic cartridge.
- ¾ in. male compression connections for hot & cold inlets.
- Adjustable center of 4 in. to 6 in.
- Single handle lever with color-coded index button.
- 2.2 gpm (8.3 L/min) flow rate.

COMPLIANCE:

- ASME A112.18.1/CSA B125 certified
- ANSI/ISEA Z358.1 certified
- NSF 372 certified (excludes FP & ST options)

OPTIONS: Add suffix to model




- | | |
|---|------------------------------|
| • 8 in. gooseneck spout | <input type="checkbox"/> - 8 |
| • Vandal resistant 0.5 gpm flow control | <input type="checkbox"/> -BO |
| • Foot pedal activation | <input type="checkbox"/> -FP |
| • Laminar flow outlet 1.5 gpm | <input type="checkbox"/> -LF |
| • Non-aerated eyewash outlets | <input type="checkbox"/> -NA |
| • Serrated tip with vacuum breaker
(not NSF 372 compliant) | <input type="checkbox"/> -ST |
| • Thermostatic mixing valve for eyewash | <input type="checkbox"/> -TW |

WARRANTY:

- 3 year limited



DIMENSIONS: NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

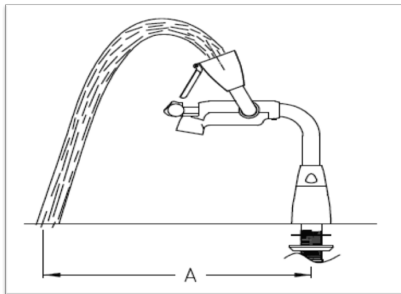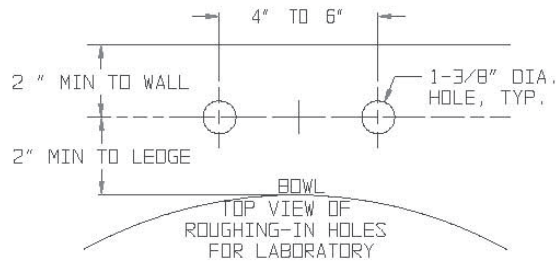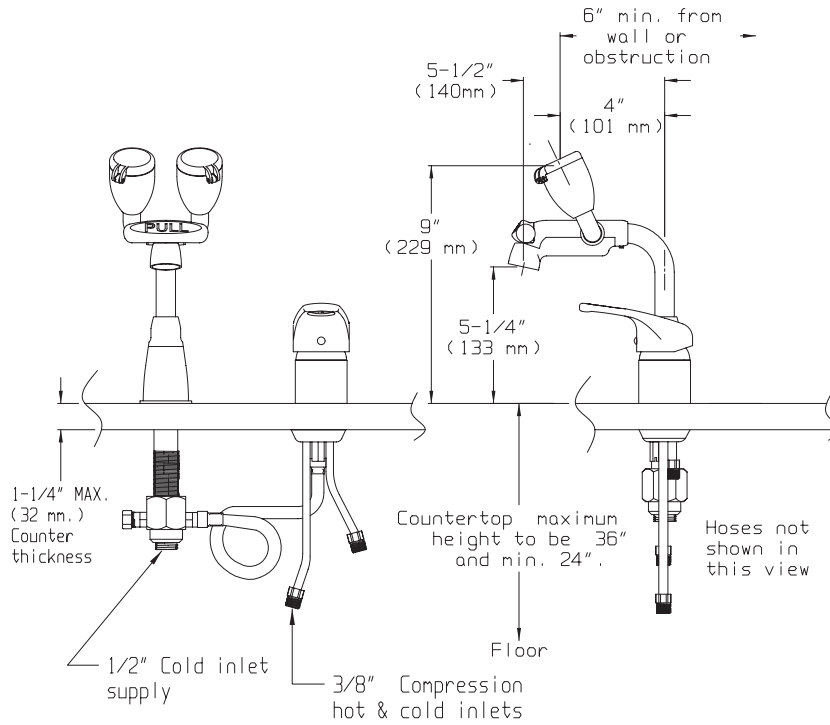

SEF-1800-CA-SL Spray Plume Length and Flow

Flowing Pressure	30 psi 2.07 Bar	40 psi 2.76 Bar	50 psi 3.45 Bar	60 psi 4.14 Bar	70 psi 4.83 Bar	80 psi 5.52 Bar
Flow Rate	2.9 gpm 11.09 L/min	3.1 gpm 11.55 L/min	2.9 gpm 11.13 L/min	2.9 gpm 10.98 L/min	2.9 gpm 10.90 L/min	2.9 gpm 10.86 L/min
Eyewash Distance Plume "A"	13.5" 34.29 cm	14.25" 36.2 cm	14.25" 36.2 cm	13.75" 34.93 cm	13.75" 34.93 cm	13.75" 34.93 cm

SEF-1800-CA-SL-8 Spray Plume Length and Flow

Flowing Pressure	30 psi 2.07 Bar	40 psi 2.76 Bar	50 psi 3.45 Bar	60 psi 4.14 Bar	70 psi 4.83 Bar	80 psi 5.52 Bar
Flow Rate	2.9 gpm 11.09 L/min	3.1 gpm 11.55 L/min	2.9 gpm 11.13 L/min	2.9 gpm 10.98 L/min	2.9 gpm 10.90 L/min	2.9 gpm 10.86 L/min
Eyewash Distance Plume "A"	17.0" 43.18 cm	18" 45.72 cm	17.5" 44.45 cm	17.0" 43.18 cm	17.0" 43.18 cm	17.0" 43.18 cm