

## Commander® Exposed Shower

### FEATURES:

- Brass body construction
- (2) 1/2" -14 NPTF inlets
- Reversible valve body
- Vandal-resistant cross handles with color-coded indexes
- 1/4 turn ceramic cartridges to ensure drip-free performance
- Exposed rough chrome plated shower body assembly, on 6" centers
- Included shower head: S-2272-E175 with a 1.75 GPM (6.6 L/min) flow rate
- Galvanized steel gooseneck with supporting strap

### SHOWER OPTIONS:

- LH: Less shower head


### STANDARDS:

- ASME A112.18.1/CSA B125.1 certified
- WaterSense certified (S-2272-E175 showerhead)

### WARRANTY:

Visit [www.speakman.com](http://www.speakman.com) for full product warranty information

- 5 Year Limited Warranty (commercial)
- 5 Year Limited Warranty (residential)

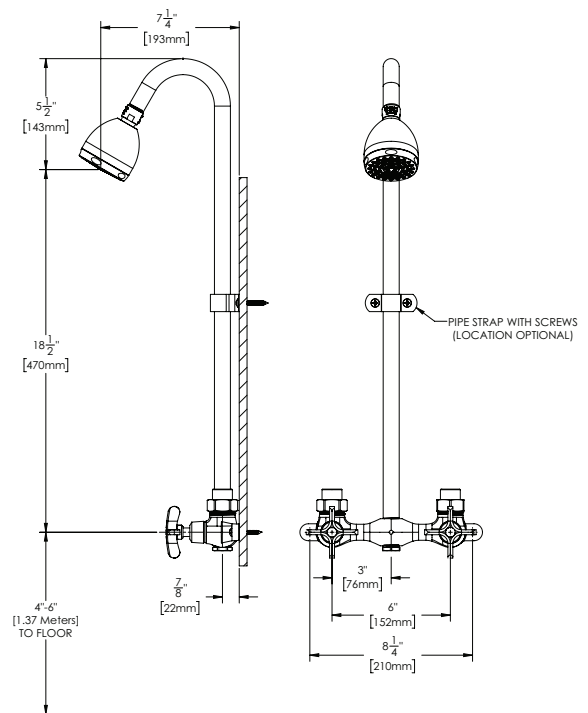

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

P: 800-537-2107  
 F: 800-977-2747  
 W: [WWW.SPEAKMAN.COM](http://WWW.SPEAKMAN.COM)  
 R: 01-SEPTEMBER 2022