


INSTALLATION SHEET FOR DOWNPOUR RAIN SHOWER




S-2555

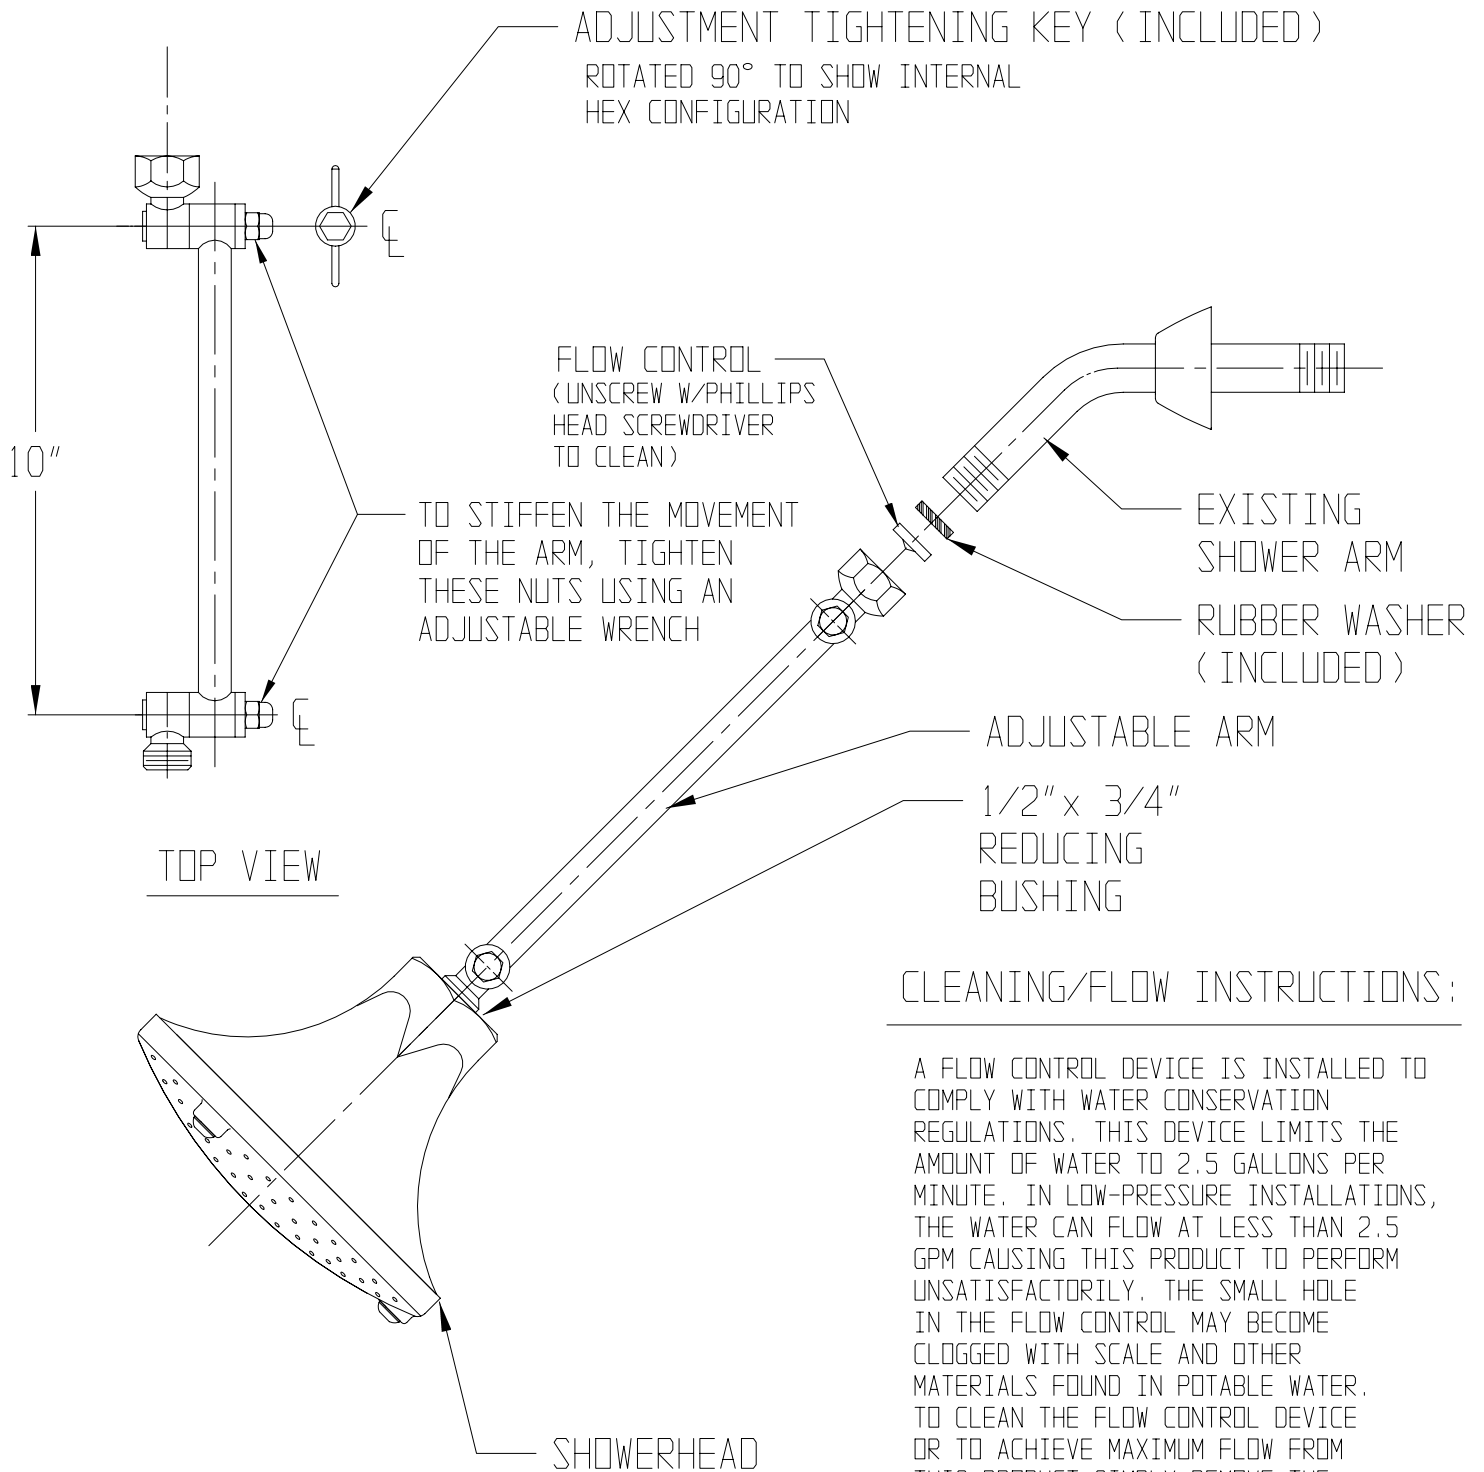

CLEANING/FLOW INSTRUCTIONS:

A FLOW CONTROL DEVICE IS INSTALLED TO COMPLY WITH WATER CONSERVATION REGULATIONS. THIS DEVICE LIMITS THE AMOUNT OF WATER TO 2.5 GALLONS PER MINUTE. IN LOW-PRESSURE INSTALLATIONS, THE WATER CAN FLOW AT LESS THAN 2.5 GPM CAUSING THIS PRODUCT TO PERFORM UNSATISFACTORILY. THE SMALL HOLE IN THE FLOW CONTROL MAY BECOME CLOGGED WITH SCALE AND OTHER MATERIALS FOUND IN POTABLE WATER. TO CLEAN THE FLOW CONTROL DEVICE OR TO ACHIEVE MAXIMUM FLOW FROM THIS PRODUCT SIMPLY REMOVE THE WHITE FLOW CONTROL DEVICE THAT IS IN THE INLET END OF THE 10" ADJUSTING ARM WITH A PHILLIPS HEAD SCREWDRIVER.



SPEAKMAN

The Quality Leader Since 1869
P.O. Box 191, Wilmington, DE 19899-0191
1-800-537-2107, FAX: 1-800-977-2747

08/00
92-1692