SPEAKMAN COMPANY

S-3231 Installation, Maintenance & Operation Instructions

COMMANDER® HEALTHCARE BEDPAN WASHER

DESCRIPTION

Speakman chrome plated brass bedpan washer combination. Wall mounted double pedal self-closing mixing valve. Renewable operating units. ½" NPTF inlet. ½" NPTF outlet. Elevated vacuum breaker. Supply ell with ½" NPTF inlet and wall flange. 69" white vinyl reinforced hose. Insulated handle, spray outlet and wall hook.

<u>SPECIFICATIONS</u>

OPTIONS

VALVE SUPPLIES: ½" NPT FEMALE. SHIPPING WEIGHT: XXX LBS.

\rightarrow	IVB — Inline Vacuum Breaker	\Q	SCV — Self Closing Valve on Handle with Elevated Vacuum Breaker
\Diamond	USS- Union Separate Stops	\Diamond	UAS- Union Angle Stops

INSTALLATION

NOTE: Reference the rough-in for supply pipe installation. Use pipe sealant on all pipe threads. Finished wall must be supported where mixing valve mounts.


Install the rough (behind the wall) piping and valve mounting support. Complete the finished wall construction. For ease of installation, it is recommended that union connections (not supplied) be installed on the inlet supply piping. With unions installed, connect mixing valve to the supply lines. Hand tighten coupling nuts of unions. Mark the finished wall for the mixing valve mounting screws. Remove mixing valve from the supply lines. Drill necessary holes for mounting screws. Reconnect valve to supply lines and wrench tighten. Attach valve to wall using mounting screws (not provided). Connect outlet piping to the mixing valve. With the necessary openings in the finished wall, assemble the supply ell, vacuum breaker and spray hose assembly to the rough piping. (See separate IMO and roughing-in sheets for detailed installation instructions on the supply ell, vacuum breaker, and spray hose assembly.) Once the installation has been completed, turn water supplies on and check all connections for leaks.

OPERATION

Holding the spray hose assembly, simply press the foot pedal(s) to operate the bedpan washer.

MAINTENANCE (CARE and CLEANING)

Periodically remove spray face and clean out any clogged holes. The gleaming finish or your SPEAKMAN COMMANDER HEALTHCARE bedpan washer can be cleaned by using mild soap and warm water. Dry immediately with a soft, clean cloth for best results.

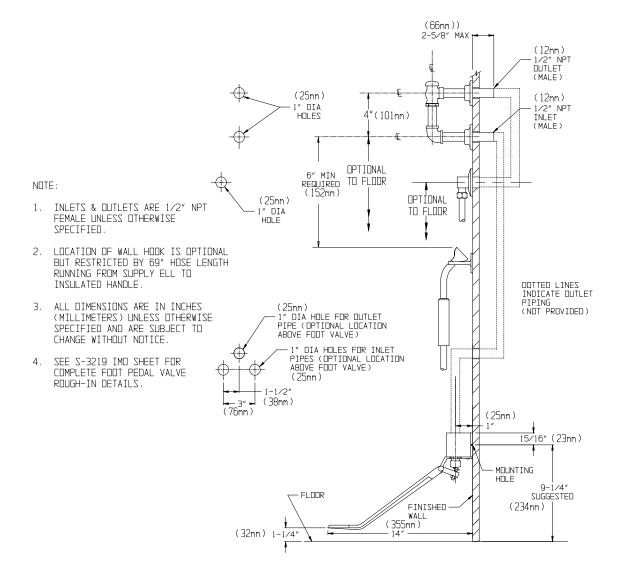

REPAIR / REPLACEMENT PARTS

ITEM NUMBER PART OR GROUP NUMBER DESCRIPTION

1 G63-0055 SPRAY HOSE ASSEMBLY

