

SPEAKMAN COMPANY

S-3440 Installation, Maintenance & Operation Instructions

STRAINER LAVATORY DRAIN

DESCRIPTION

Speakman chrome plated strainer lavatory drain. Flat brass strainer plate. Brass 1¼" O.D. tailpiece.

SPECIFICATIONS

OUTLET SUPPLY: 1 ¼" O.D.
SHIPPING WEIGHT: XXX LBS.


INSTALLATION

Unscrew locknut from drain assembly. Remove fibre and rubber washer. Apply sealant around underside of top flange of drain. Insert drain through drain hole in sink. Place rubber (Flat side down) then fibre washer on drain. Screw locknut onto drain and tighten with wrench. Seal and tighten tailpiece into drain assembly. Install trap assembly to tailpiece of drain. Check drainage system for leaks.

MAINTENANCE (CARE and CLEANING)


The finish of your SPEAKMAN lavatory drain can be cleaned by using mild soap and warm water.

ROUGH-IN MEASUREMENTS

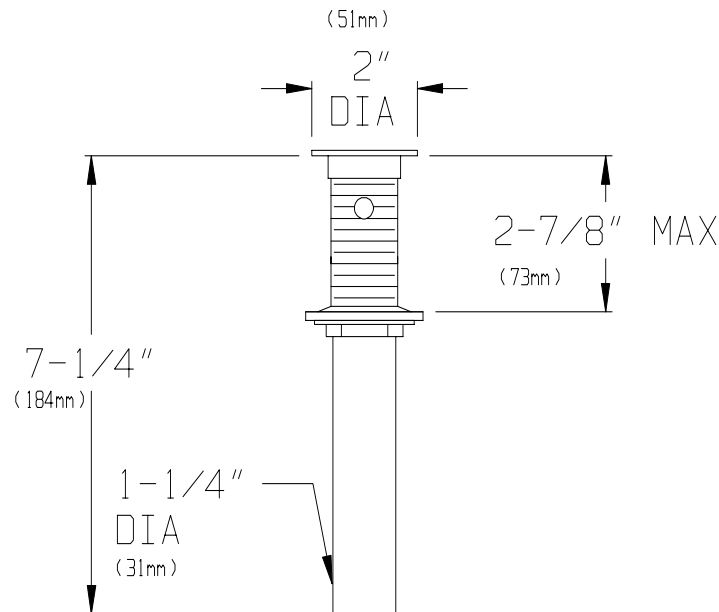

NOTE:

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SPECIFIED AND ARE
SUBJECT TO CHANGE WITHOUT NOTICE.



SPEAKMAN

The Quality Leader since 1869
P.O. Box 191, Wilmington, DE 19899-0191
USA 1-800/537-2107, FAX: 1-800/977-2747

06/00
92-1980