

# SPEAKMAN®

## SEF-1810

### EYESAVER® FAUCET SPECIFICATIONS

#### DESCRIPTION

The SEF-1810 Eyesaver® faucet combines a sensor activated gooseneck faucet with an independently operated eyewash. The faucet features a 4" deck plate with under counter mixer while the eyewash offers twin aerated sprays and flip-top dust covers.

#### SPECIFICATIONS

##### EYEWASH

**Activator:** Pull handle with graphics

**Spray heads:** (2) aerated yellow plastic spray outlets with flip-top dust caps

**Performance:** 2.6 gpm @ 30 psi

**Approvals:** Meets ANSI Z358.1

##### FAUCET

**Supply:** 3/8" compression connections with male threads for hot and cold inlets

**Center Distance:** 4"

**Activator:** Sensor battery operated

**Performance:** 2.2 gpm


**Counter thickness:** Up to 1 1/4" thick

**Approvals:** Meets ASME A112.18.1, CSA B125-98

**Universal Emergency Sign Included**

#### OPTIONS

- ☐ BO Vandal resistant 0.5 gpm flow control
- ☐ HS Two (2) Stainless steel flexible supply hoses to supply stops
- ☐ LF Laminar flow outlet 2.2 gpm
- ☐ NA No aerated eyewash
- ☐ ST Serrated tip with vacuum breaker
- ☐ TW Addition of SE-370 thermostatic mixing valve
- ☐ 8 8" gooseneck spout

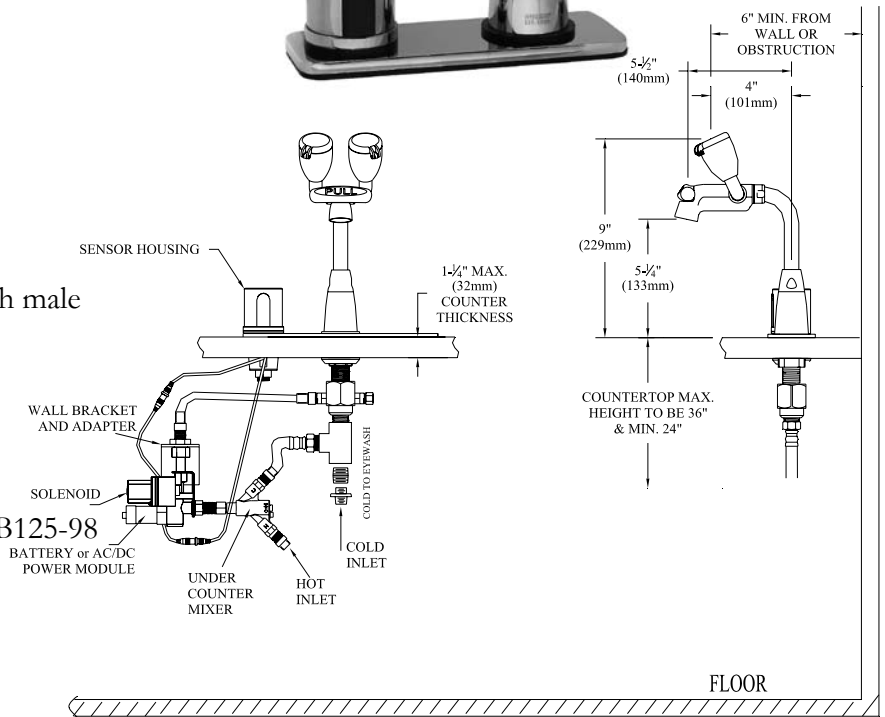

Job Name	_____
Location	_____
Architect/Engineer	_____
Sales Representative	_____
Wholesaler	_____
Date	_____
Model #	_____