


Instructions for Models:

CPT-9400-P

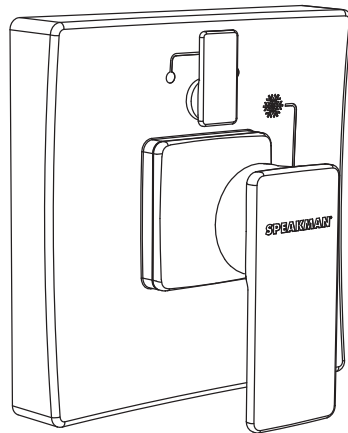

Need Help?

For additional assistance or service call:

SPEAKMAN Company
400 Anchor Mill Road
New Castle, DE 19720

PHONE: 800-537-2107
EMAIL: customerservice@speakmancompany.com
WEB: www.speakmancompany.com


92-CPT-9400-P-R1

What You Need To Know:

Tools:

Required:

*Phillips Screwdriver



Helpful:

*Tape Measure



Important Notes:

Be sure to read instructions thoroughly before beginning installation. Do not overtighten any connections or damage may occur.

Be sure to have properly adjusted the Temperature Limiting Stop (TLS) as per the Valve Installation Instructions before installing Valve Trim.


Safety Tips:

Cover your drain to prevent loss of parts.


Maintenance:

Your new Valve Trim is designed for years of trouble-free performance. Keep it looking new by cleaning it periodically with a soft cloth. Avoid abrasive cleaners, steel wool, and harsh chemicals as these will dull the finish and void your warranty.



- ① Clean wall surface. Place Mounting Base① on to valve, align mounting holes, and secure with screws②.

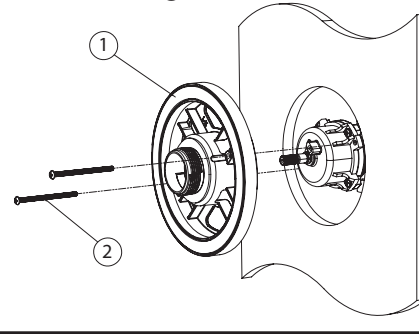


- ② There are 2 Connectors③ included to allow for both Shallow and Deep mount applications. Please select Connector appropriate for your installation.




For Shallow Mount Application




For Deep Mount Application




- ③ Confirm that the valve is in the "OFF" position. Place appropriate Connector③ on spindle of valve making sure to orient the Connector so that one set of splines are in a perfectly vertical position.

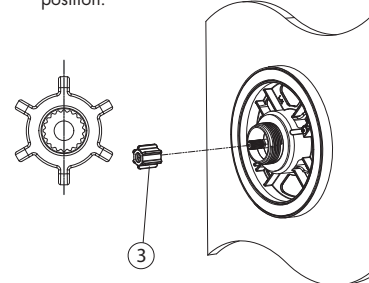


- ④ ***IMPORTANT***
When installed correctly the Connector③ should protrude from the Mounting Base in between 5/16" and 1". Secure with Screw④.

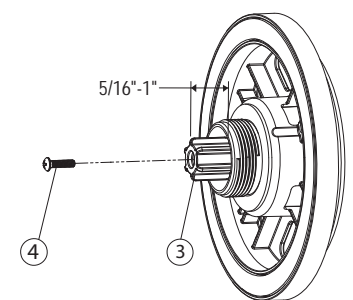


- ⑤ Place Escutcheon⑤ on Mounting Base. Take care to align Diverter Handle Assembly ⑤A with Diverter Spindle.

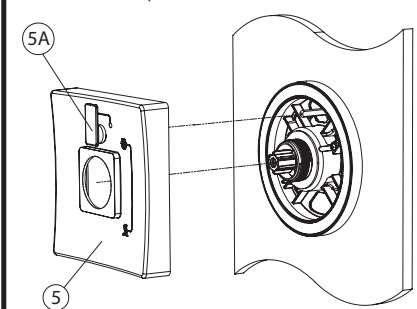

- ⑥ Align Handle Assembly⑥ with Connector and Escutcheon. Keep Handle ⑥A in a stationary vertical position as you thread Handle Hub ⑥B on to Mounting Base. Tighten until snug.

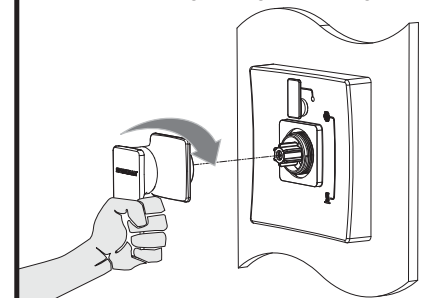

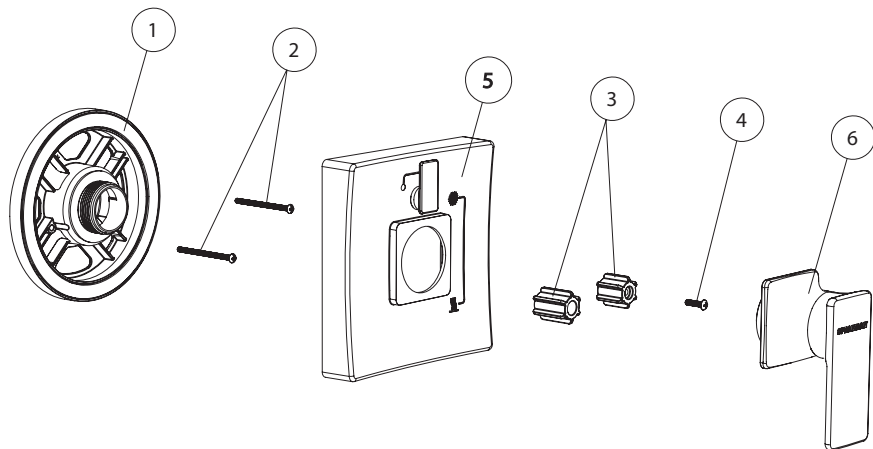

RPG05-0874 ②③④
 RPG10-0359-(PC,BN) ⑤
 RPG04-0876-(PC,BN) ⑥

