

Sentinel Mark II® Anti-Scald Balanced Pressure Exposed Shower

FEATURES:

- Brass body construction
- (2) 1/2" -14 NPTF inlets
- Pressure balancing & ceramic temperature regulating cartridge with built-in check valves
- Brass lever handle
- Integral stops allow water shut off for servicing valve
- Supply connections from floor, ceiling or wall
- Adjustable temperature limit stop to control maximum temperature setting
- Supports back-to-back installation
- 7-1/2" center to center measure
- Vandal-resistant
- Included shower head: S-2292 2.5 GPM (9.5 L/min) flow rate
- Polished chrome plated brass gooseneck with supporting strap

SHOWER OPTIONS:

- LH: Less shower head


STANDARDS:

- ASSE 1016 certified
- ASME A112.18.1/CSA B125.1 certified

WARRANTY:

Visit www.speakman.com for full product warranty information

- 5 Year Limited Warranty (commercial)
- 5 Year Limited Warranty (residential)

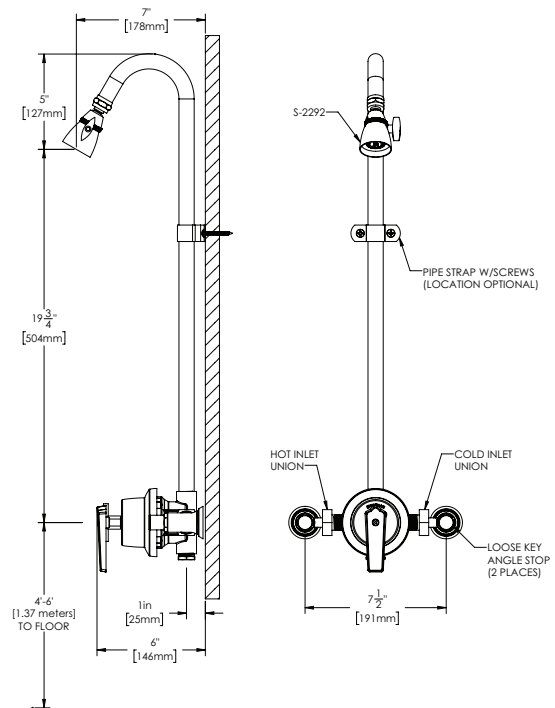

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: 01-JUNE 2018