



**Windham™**

Two-piece round-front toilet, 1.28 gpf  
**402320-WRA**

### Features

- Two-piece design
- Round-front bowl offers an ideal solution for smaller bathrooms and powder rooms
- Standard height
- 1.28 gpf (4.8 lpf)
- Color-matched right-hand white trip lever included
- 2-1/8" (54 mm) fully glazed trapway
- Combination consists of the 403017 bowl and 402362-WRA tank
- Pro Force® Plus flushing technology delivers greater flushing power than previous Pro Force® models

### Installation

- Three-bolt quick-connect installation
- Standard 12" (305 mm) rough-in
- Seat and supply line sold separately

### Recommended Products/Accessories

K-4775 Brevia™ Quick-Release™ round-front toilet seat

### Included Components

403017 Round-front toilet bowl



### Codes/Standards

ASME A112.19.2/CSA B45.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
IAPMO Certification

### STERLING® Toilet Limited Warranty


See website for detailed warranty information.

1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.sterlingplumbing.com](http://www.sterlingplumbing.com).

7-22-2024 21:39 - US/CA

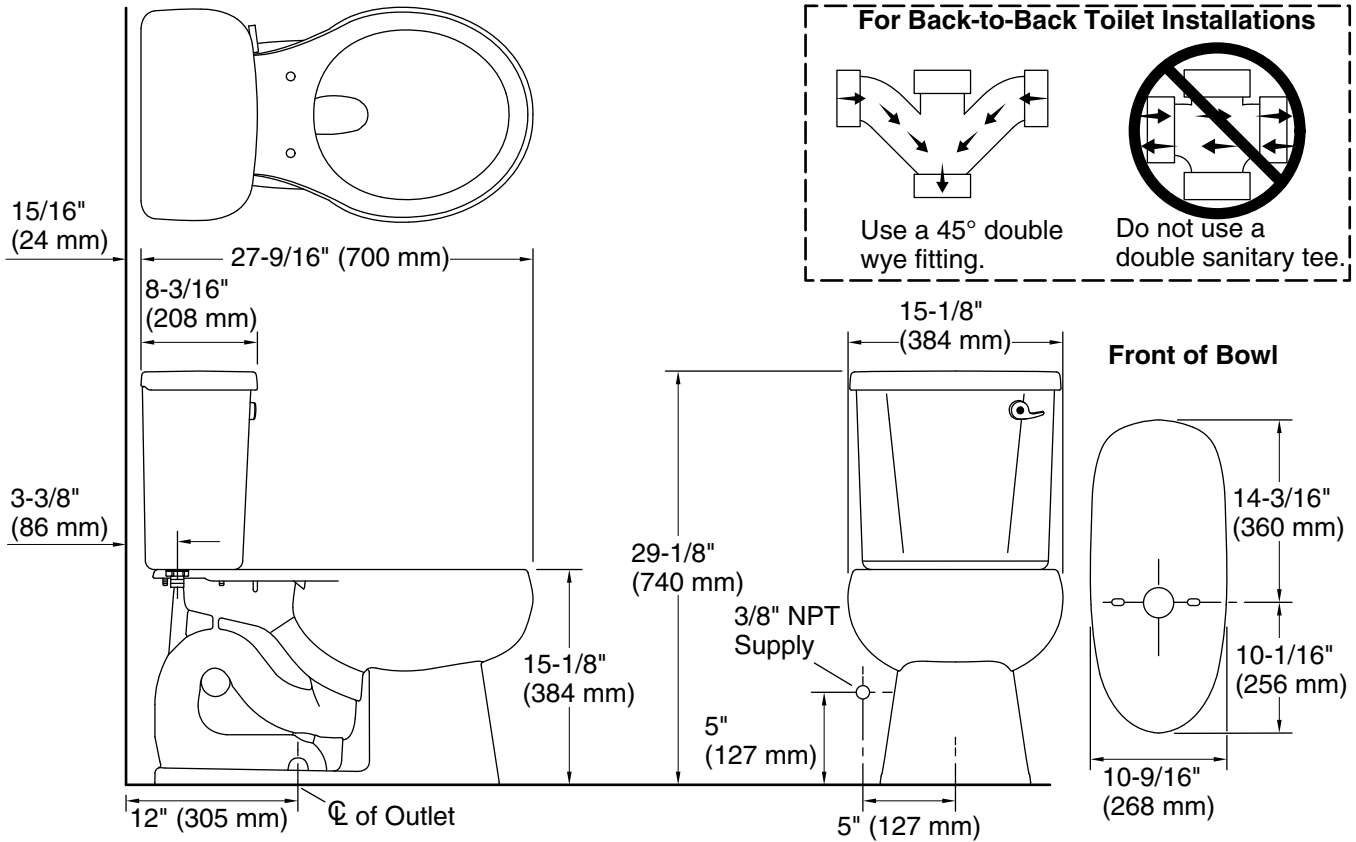

### Technical Information

All product dimensions are nominal.

Toilet type:	Floor-mount
Waste Outlet:	Floor
Flush type:	ProForce Plus
Trap passageway:	2-1/8" (54 mm)
Rim to water surface:	6-9/16" (167 mm)
Rough-in:	12" (305 mm)

### Fixture Supply Requirements

Min static pressure:	20 psi (137.9 kPa)
Max static pressure:	80 psi (551.6 kPa)
Min flowing pressure:	15 psi (103.4 kPa)
Min flow rate:	1 gpm (3.8 lpm)

### Notes

Install this product according to the installation instructions.