



# Attend™

## 69" H pivot shower door with 1/8"-thick glass

### 33605-3G05

#### Features

- Full-length exterior integrated handle
- Tempered glass ensures enhanced safety and durability
- SealNetik™ full-length magnetic seal keeps door firmly closed, providing excellent water containment
- Smooth, easy-to-clean wall jambs
- Pivot shower door configuration consists of one moving panel

#### Material

- Framed, 1/8" (3 mm) thick Clear tempered glass
- Anodized aluminum prevents rust and corrosion

#### Installation

- Fits opening widths 27-1/8" – 30" (689 – 762 mm)
- 69" (1753 mm) high, with 68" (1727 mm) minimum head clearance
- 2-7/8" (73 mm) width adjustment
- 1/2" (13 mm) out-of-plumb adjustability on each side simplifies installation
- Door can be installed to open to the left or right to suit your bathroom layout



#### Codes/Standards

ANSI Z97.1  
CAN/CGSB-12.1  
CPSC 16CFR 1201

#### STERLING® One-Year Limited Warranty

See website for detailed warranty information.

#### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|






|    |               |
|----|---------------|
| SH | Bright Silver |
| N  | Nickel        |
| BL | Matte Black   |

#### Available Glass Options

| Code | Description |
|------|-------------|
|------|-------------|

|     |       |
|-----|-------|
| G05 | Clear |
|-----|-------|

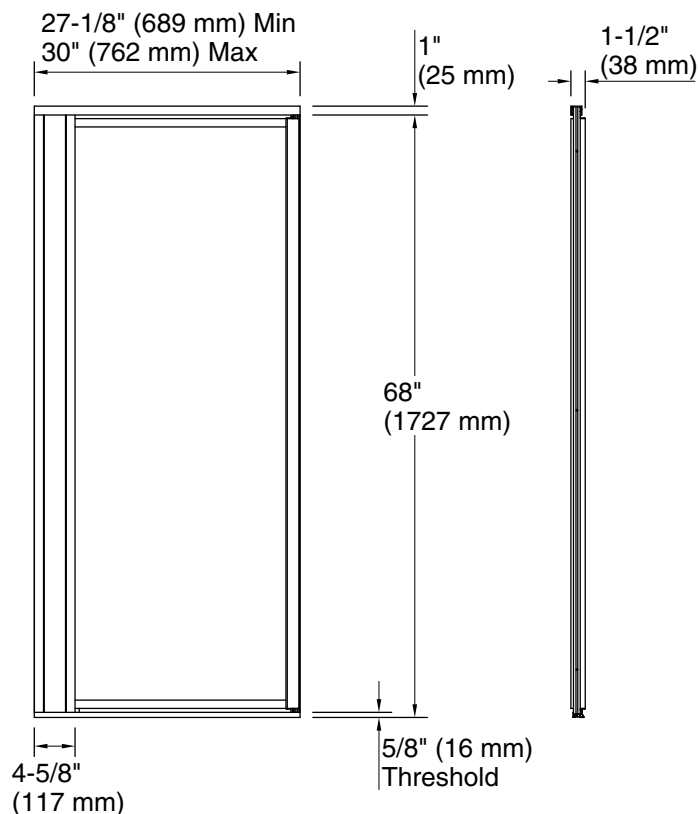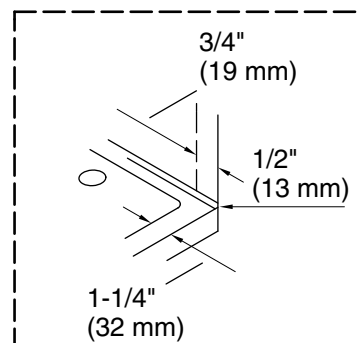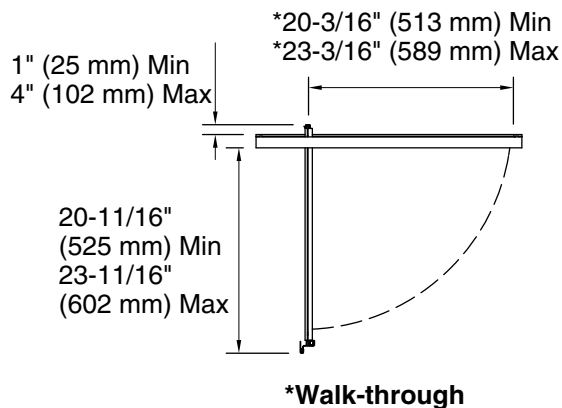

### Technical Information

All product dimensions are nominal.

|                  |                |
|------------------|----------------|
| Base-To-Wall     | 1/2" (13 mm)   |
| Radius – Max:    |                |
| Shower Ledge Min | 1-1/4" (32 mm) |
| Flat:            |                |
| Shower Wall Min  | 7/8" (22 mm)   |
| Flat:            |                |

### Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 72" (1829 mm) to allow for installation clearance.