

## Performa™

60" AFD Bath **71041122** 





### **Features**

- Durable high gloss finish.
- Above-floor-drain (AFD) rough-in.
- Factory installed injection molded apron extension and under support structure.
- 17-1/4" (438 mm) bath depth (floor to top of threshold).
- 60" (1524 mm) x 29" (737 mm) x 17-1/4" (438 mm) complete unit finished dimensions

### Material

Compression molded from our exclusive solid Vikrell® material.



### Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 Greenguard UL 2818 - Gold ADA ICC/ANSI A117.1 HUD, UM Bulletin 73

# STERLING® Warranty - Fixtures Made of Solid Vikrell Material

See website for detailed warranty information.

### **Available Color/Finishes**


Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Riscuit



### Performa™

60" AFD Bath **71041122** 

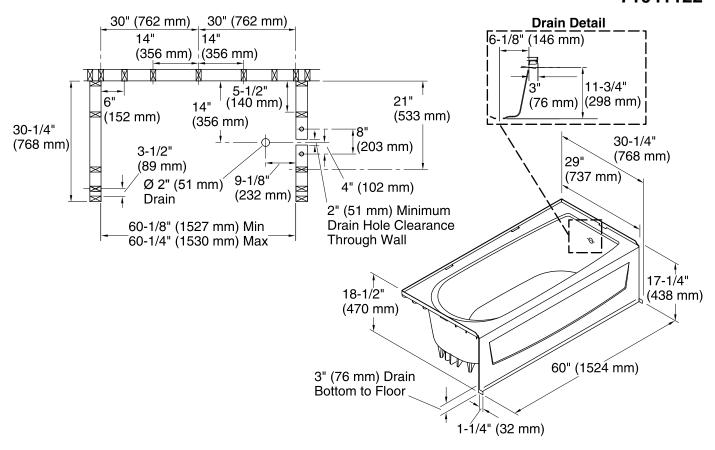

### **Technical Information**

All product dimensions are nominal.

Installation: Alcove with Flange

Drain location: Right

Basin area, bottom: 21" x 39" (533 mm x 991 mm)
Basin area, top: 24" x 53" (610 mm x 1346 mm)

Water depth: 10-1/4" (260 mm)

Water capacity: 35 gal (132.5 L)

Door width required: 56-3/4" (1441 mm)

#### **Notes**

Measure your actual product for roughing-in details.

Install this product according to the installation guide.

Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown. ADA compliant when installed to the specific requirements of these regulations.