



A KOHLER COMPANY

ACCLAIM™


Features

- Handicap seat mounts directly to back wall of bath surround and rests on dam of bath
- Stainless steel grab bars 1-1/2" (3.8 cm) O.D.
- Compression molded from Sterling's exclusive solid VIKRELL™ material
- Modular 4-piece design
- Lightly pebbled bottom surface for sure footing
- Tongue-and-groove "snap together" design allows for caulkless installation
- Durable high gloss finish
- 10 year consumer/3 year commercial limited warranty
- 60" (152.4 cm) x 31-1/2" (80 cm) x 73-1/2" (186.7 cm) complete unit rough-in dimensions include flanges
- 60" (152.4 cm) x 30" (76.2 cm) x 72" (182.9 cm) complete unit finished dimensions
- 15" (38.1 cm) bath depth (floor to top of dam)
- Backwall bars: two 42" (106.7 cm) long handicap bars Endwall bars: 24" (61 cm) long handicap bar

60" (152.4 cm) ADA COMPLIANT BATH/SHOWER SYSTEM

71090115

ALSO 71090125

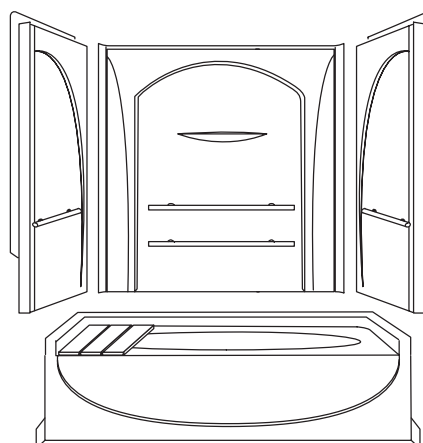

ADA

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ANSI Z124.1
- ASTM E84
- ASTM F469
- ICC/ANSI A117.1
- IAPMO/UPC
- HUD, UM Bulletin 73A
- NAHB Research Foundation, Inc.

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	ADA Compliant Complete Unit Description	Colors/Finishes	
71090115	60" (152.4 cm) ADA compliant bath and wall surround, left drain	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
71090125	60" (152.4 cm) ADA compliant bath and wall surround, right drain	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
Model	ADA Adaptable Wall Component Description	Colors/Finishes	
71092103	Back wall, with grab bar	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
74094103	Complete wall set, with grab bars	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
71095103	End wall set, with grab bars	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____

SterlingPlumbing.com

Visit us online for fixture color choices, detailed product information, color photos, installation instructions, care guides, and warranties. Sterling offers additional lines of plumbing products to complement the Sterling product you've chosen. Sign up for the Sterling monthly e-newsletter which showcases our latest product innovations. You may also call our Sterling Plumbing Answer Center from within the USA at 1-888-STERLING in addition to consulting with your local dealer. Sterling. Strong. Professional. Design.

Technical Information

Fixture:*	basin area	top area
Bathing well	42" (106.7 cm) x 16-1/4" (41.3 cm)	56" (142.2 cm) x 23-3/4" (60.3 cm)
	water depth	capacity
To overflow	13" (33 cm)	34 gals. (128.7 L)
* Approximate measurements for comparison only.		
Model	door maximum width	door maximum height
71090115/ 71090125	58-1/2" (148.4 cm)	56-1/2" (143.5 cm)

Installation Notes

Install this product according to the installation guide.


To be ADA compliant, install according to the requirements of the Americans with Disabilities Act (ADA). Use only ADA compliant components.

Size the drain cutout to fit the drain assembly that will be used.

End stud positioning is critical if nailing-in flanges are to be used.

Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown for support clip or roofing nail installation.

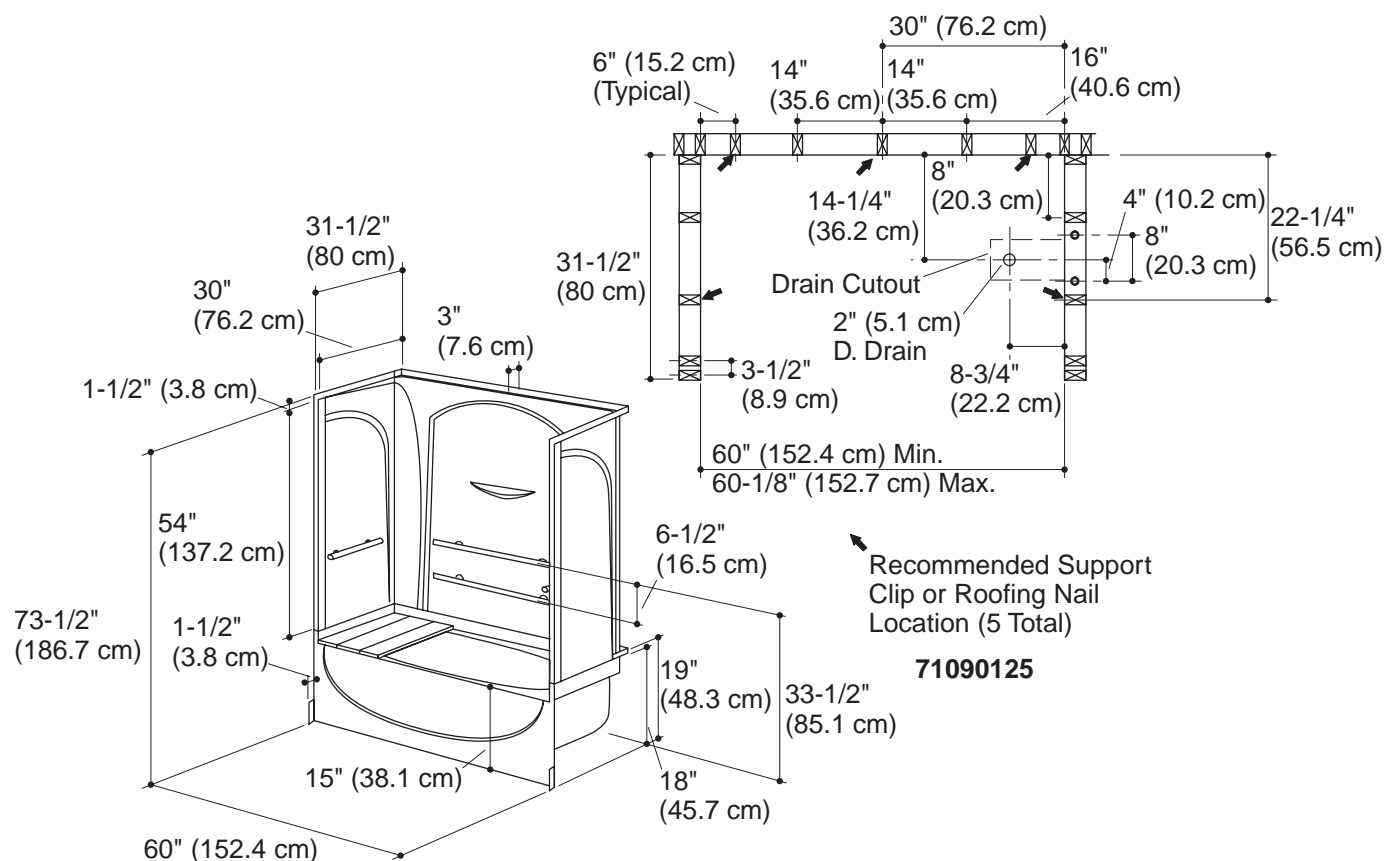

Product Diagram