

STERLING®

A KOHLER COMPANY


ACCORD™

Features

- Compression molded from our exclusive solid Vikrell® material
- Bath and integral apron eliminates installation step
- Tongue-and-groove "snap together" design
- Modular 4-piece design
- Durable high-gloss finish
- 10-year consumer/3-year commercial limited warranty
- Available with or without above-the-floor drain
- Wall surround allows for attachment of grab bars
- 18" (45.7 cm) bath depth (floor to top of threshold)
- 60" (152.4 cm) x 33-1/4" (84.5 cm) x 75-1/2" (191.8 cm) complete unit rough-in dimensions include flange
- 60" (152.4 cm) x 32" (81.3 cm) x 74-1/4" (188.6 cm) complete unit finished dimensions

60" (152.4 cm) BATH AND WALL SURROUND WITH BACKER BOARDS

71150116
ALSO 71150126

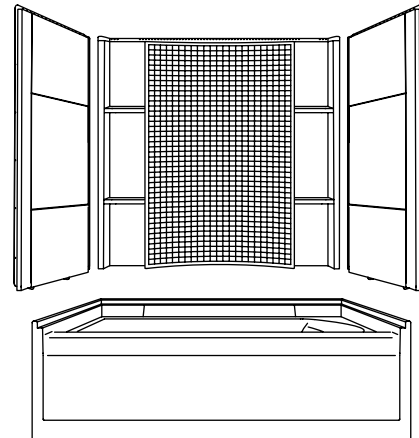

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- CSA B45
- ASTM F462 Slip Resistance
- ASTM E162
- ASTM E662

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Complete Unit Description	Colors/Finishes	
71150116	60" (152.4 cm) bath and wall surround with backer boards, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
71150126	60" (152.4 cm) bath and wall surround with backer boards, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
Model	Wall Component Description	Colors/Finishes	
71154106	Complete wall set with backer board locations	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

ACCORD™

Technical Information

Fixture:*	
Bathing well	
Basin area	21-1/2" (54.6 cm) x 46-1/8" (117.2 cm)
Top area	23" (58.4 cm) x 51" (129.5 cm)
To overflow	
Water depth	13-1/8" (33.3 cm)
Capacity	56 gal (211.8 L)
* Approximate measurements for comparison only.	
Door maximum width	56-3/4" (144.1 cm)
Door maximum height	55-7/8" (141.9 cm)

Installation Notes

Install this product according to the installation guide.


Size the drain cutout to fit the drain assembly that will be used.

End stud positioning is critical if nailing-in flanges are to be used.

Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown for support clip or roofing nail installation.

Attach grab bars at the specified backer board locations only.

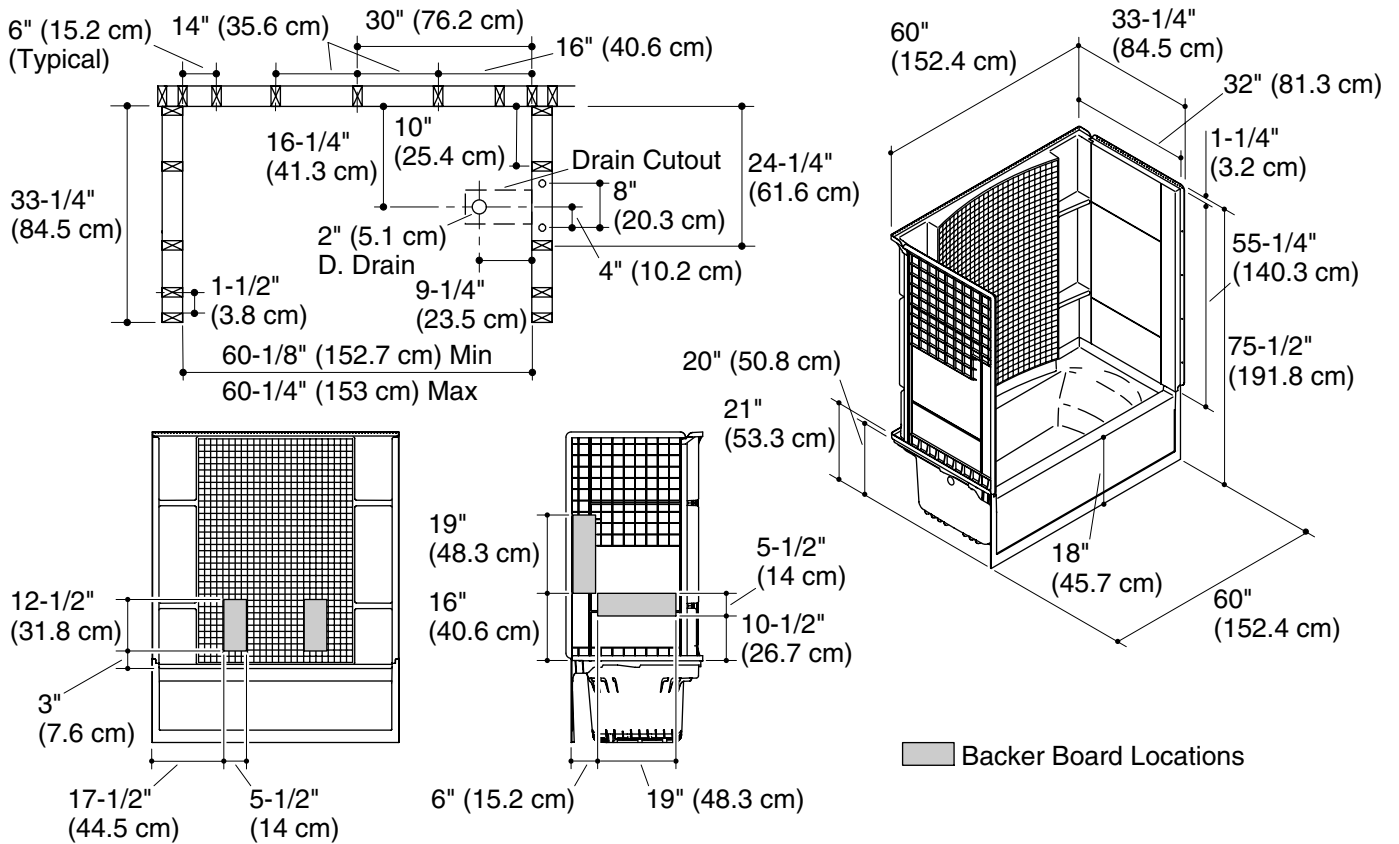

Product Diagram