

STERLING®

A KOHLER COMPANY

ACCORD™

Features

- Compression molded from our exclusive solid Vikrell® material
- Above-floor-drain (AFD) rough-in
- Modular 4-piece design
- Pivot "snap together" installation
- Caulkless installation
- Durable high-gloss finish
- 10-year consumer/3-year commercial limited warranty
- 20" (50.8 cm) bath depth (floor to top of threshold)
- 60-1/4" (153 cm) x 37-1/4" (94.6 cm) x 77-1/2" (196.9 cm) complete unit rough-in dimensions include flanges
- 60" (152.4 cm) x 36" (91.4 cm) x 76-1/4" (193.7 cm) complete unit finished dimensions


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASTM E162
- ASTM E662
- CSA B45.0
- CSA B45.5

60" (152.4 cm) AFD BATH AND WALL SURROUND

71160112
ALSO 71160122

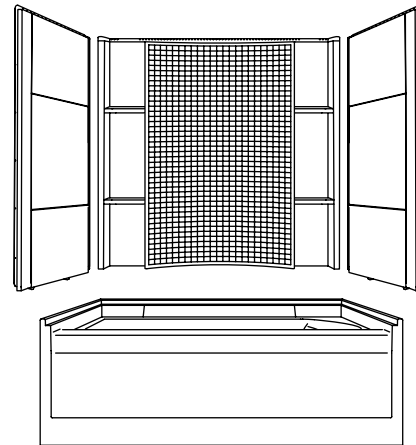

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Complete Unit Description	Colors/Finishes	
71160112	60" (152.4 cm) AFD bath and wall surround with left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
71160122	60" (152.4 cm) AFD bath and wall surround with right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Technical Information

Fixture*:	
Bathing well:	
Basin area	23-1/4" (59.1 cm) x 46-1/8" (117.2 cm)
Top area	24-7/8" (63.2 cm) x 50-7/8" (129.2 cm)
To overflow:	
Water depth	12-3/8" (31.4 cm)
Capacity	57 gal (215.8 L)
* Approximate measurements for comparison only.	

Model	door maximum width	door maximum height
71160112	56-3/4" (144.1 cm)	55-7/8" (141.9 cm)
71160122		

Installation Notes


Install this product according to the installation guide.

Size the drain hole clearance to fit the drain assembly that will be used.

End stud positioning is critical.

Studs should be positioned roughly as shown for wall surround installation.

Bath cannot be installed without the wall surround.

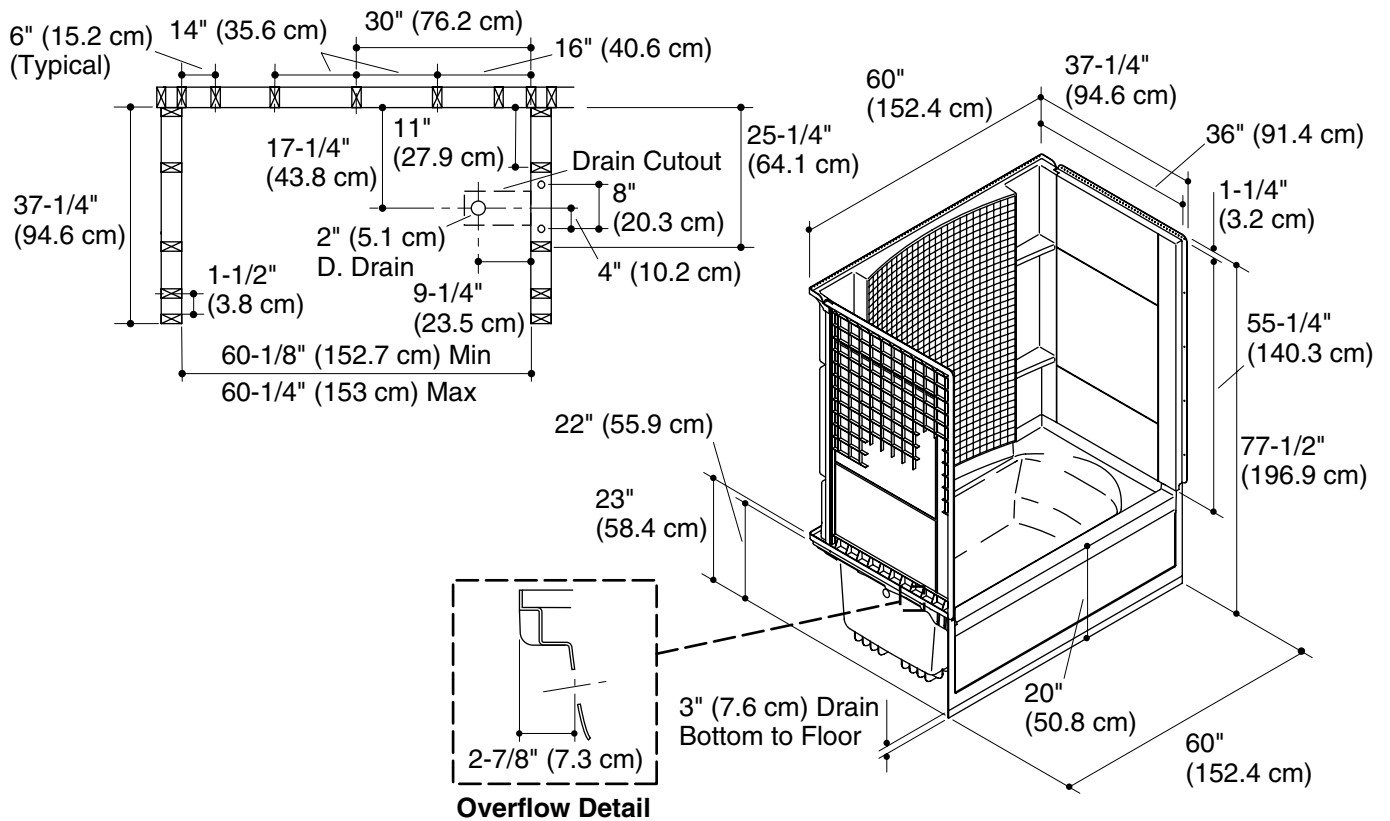

Product Diagram