**Features**

- 4" threshold
- Durable high-gloss finish with molded-in textured floor
- Suitable for tile-down applications
- Compatible with Ensemble walls (series 7217)
- Innovative Dry-Block™ seal and channeled water containment system form watertight seams
- 1" (25 mm) weep channels redirect water into the base, providing superior water containment

**Material**

- Made from solid Vikrell® material for strength, durability, and lasting beauty

**Installation**

- Left drain
- Caulk-free installation

**Recommended Products/Accessories**

K-23726 Drain treatment

**Codes/Standards**

CSA B45.5/IAPMO Z124  
ASTM E162  
HUD, UM Bulletin 73

**STERLING® Vikrell® or Acrylic Baths and Shower Bases Ten-Year Limited Warranty**


See website for detailed warranty information.

**Available Colors/Finishes**

*Color tiles intended for reference only.*

**Color   Code   Description**

	0	White
--	---	-------

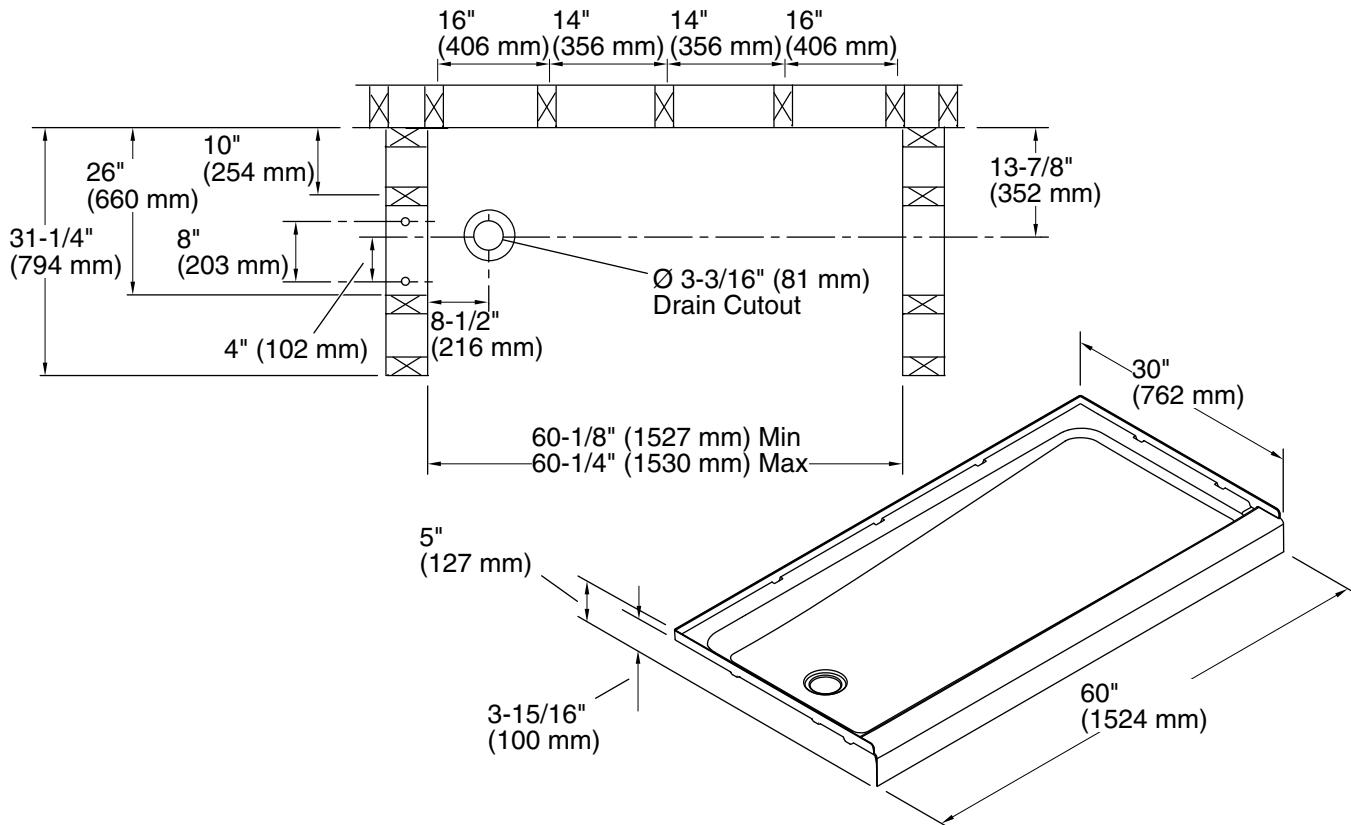

### Technical Information

All product dimensions are nominal.

Drain location: Left

Basin area, top: 57" x 24-3/8" (1448 mm x 619 mm)

Weight: 38 lbs (17.2 kg)

Minimum flat for door: 3" (76 mm)

### Notes

Install this product according to the installation instructions.

Studs should be positioned roughly as shown.

Double studding is recommended for pivot shower door installations.