

STERLING®

A KOHLER COMPANY

ENSEMBLE™


Features

- Compression molded from our exclusive solid Vikrell® material
- Pump with air switch and grounding-type plug-in cord
- Tongue-and-groove 4-piece modular design allows for easy "snap together" installation
- Durable high-gloss finish
- Three-piece wall set with generous storage shelves
- 8 Jets
- Integral apron with removable access panel
- 10-year consumer/3-year commercial limited warranty
- 1-year limited warranty pump motor assembly
- 60-1/4" (153 cm) x 33-1/4" (84.5 cm) x 75-1/4" (191.1 cm) complete unit rough-in dimensions include flanges
- 60" (152.4 cm) x 32" (81.3 cm) x 74" (188 cm) complete unit finished dimensions

32" (81.3 cm) WHIRLPOOL BATH AND WALL SURROUND

76120110

ALSO 76120120, 76220110, 76220120

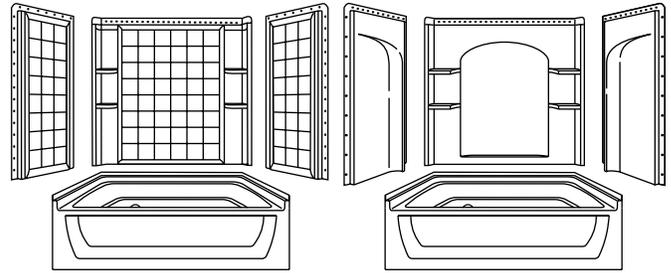

76120120

76220120

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASTM E162
- ASTM E662
- ANSI Z124.1.2
- HUD, UM Bulletin 73A
- ASTM F462 Slip Resistance
- ASME A112.19.7M
- UL 1795

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
76120110	32" (81.3 cm) whirlpool bath and wall surround, tiled, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
76120120	32" (81.3 cm) whirlpool bath and wall surround, tiled, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
76220110	32" (81.3 cm) whirlpool bath and wall surround, curved, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
76220120	32" (81.3 cm) whirlpool bath and wall surround, curved, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

ENSEMBLE™

Technical Information

Fixture*:	basin area	top area
Bathing well	42" (106.7 cm) x 20" (50.8 cm)	54" (137.2 cm) x 26" (66 cm)
To overflow	water depth	capacity
	13-3/4" (34.9 cm)	55 gal (208.2 L)
* Approximate measurements for comparison only.		

Pump:	V	Hz	A
1-speed	120	60	7

Model	door maximum width	door maximum height
76120110	57-11/16" (146.5 cm)	55-1/2" (141 cm)
76120120		
76220110		
76220120		


Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz

Installation Notes

Install this product according to the installation guide.

Pump is supplied with a grounding type plug-in cord. Locate the outlet behind the whirlpool, and within 24" (61 cm) of the pump.

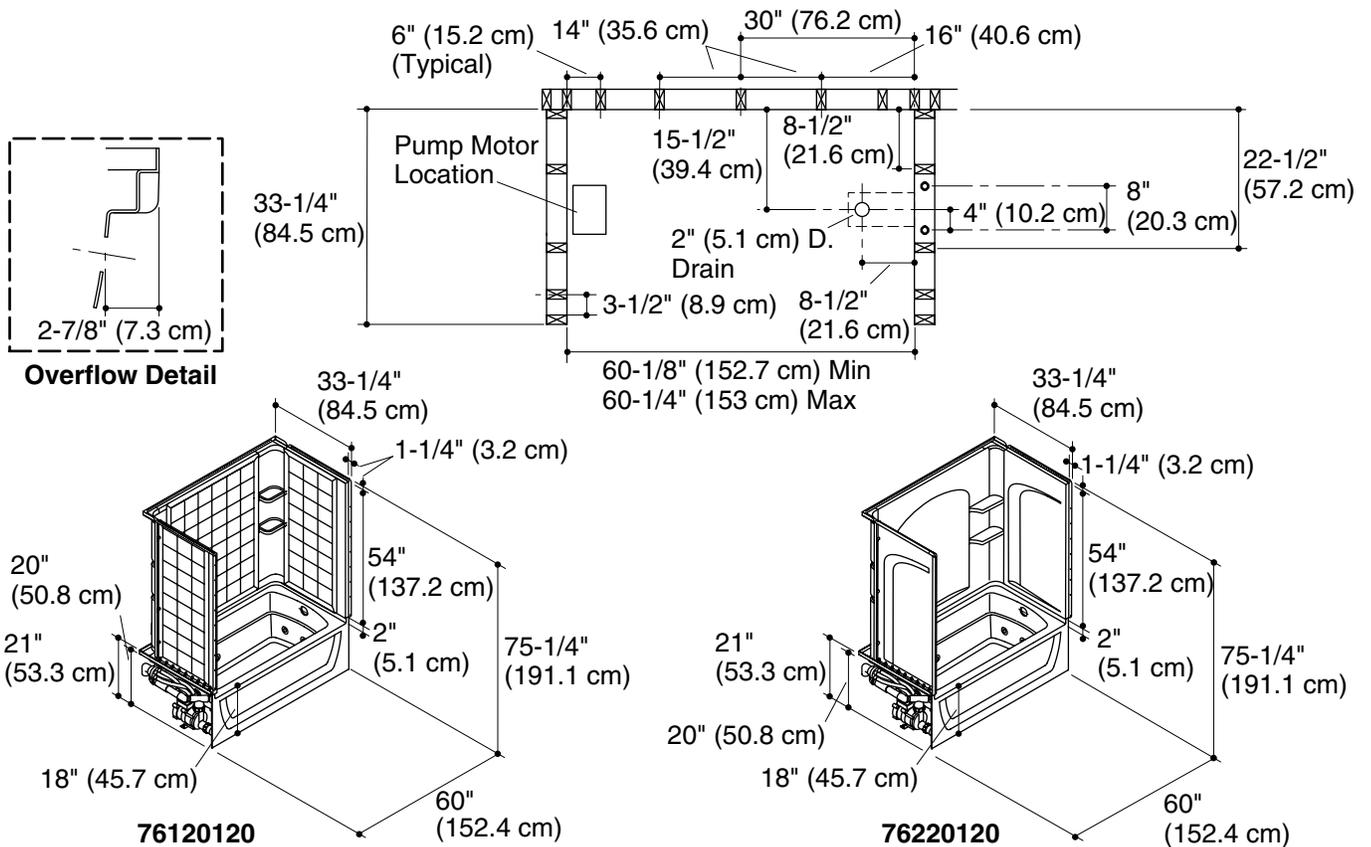

Product Diagram