



SDS-C301N

SOFT-DOWN STAY

LID SUPPORTS

SOFT-DOWN STAY



- For UPWARD-OPENING FLAP DOOR with concealed, piano or butt hinges.
- SDS-C301N is designed to hold door in closed and opened position.
- Non-handed
- Torque Calculation :
 Torque = Door Height x 1/2 x Door Weight
 Per Piece : 40~70 kg·cm (35~60 lbs·inch)
 Per Pair : 80~140 kg·cm (70~120 lbs·inch)
- Recommended Door Thickness : 20mm (25/32")





White



Black



Mounting Plate SDS-A

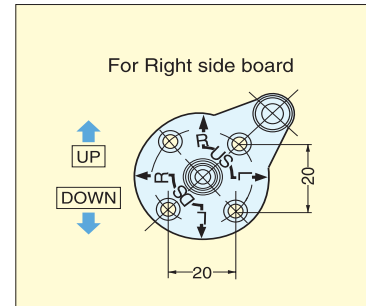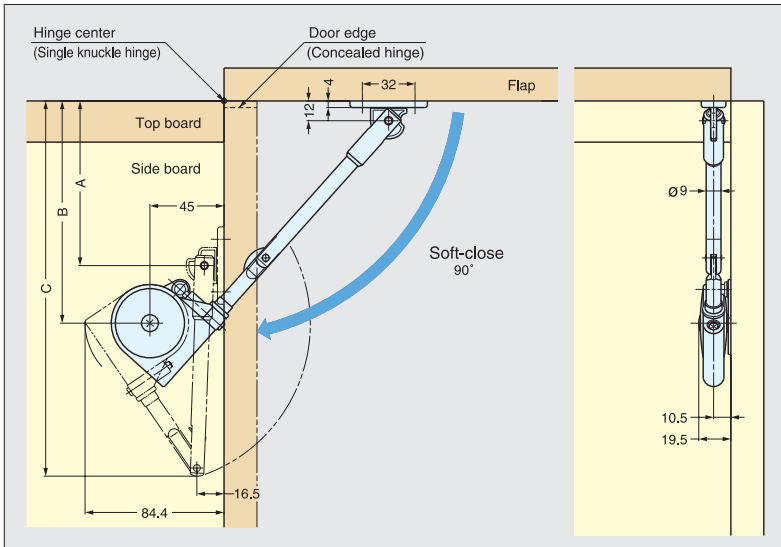

Hinge Type	Coverage	A	B	C
Concealed Hinge	-	108 (4-1/4")	143 (5-5/8")	232 (9-9/64")
Single Knuckle Hinge	Overlay	100 (3-15/16")	135 (5-5/16")	223 (8-25/32")
	Inset	97 (3-13/16")	132 (5-13/64")	220 (8-21/32")

Item No.	Color	Weight (g)	Box (pcs)	Carton (pcs)
SDS-C301N/WHT	White	165	20	100
SDS-C301N/BLK	Black			

Material	Finish/Color
Steel, Zinc Alloy	Nickel
Plastic	Black, White