


SLS-ELAN


EASY LIFT-UP STAY

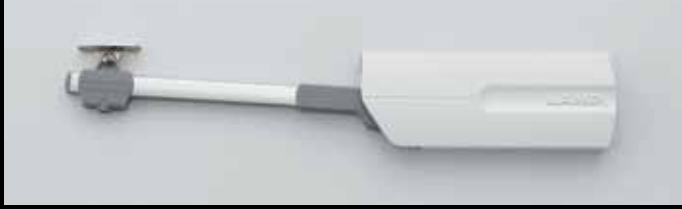


- Lift-assist mechanism for extra light-opening with free stop feature.
- Offers smooth and soft downward movement preventing lids or doors from slamming shut.
- Easy to install by aligning the body to the edge of cabinet.
- Recognized by LGA for 40,000 cycles.

3 functions on 1 stay



1. Lift-assist





2. Free stop



3. Soft-close





Designed to operate at room temperature 0°-40°C (32°-104°F).

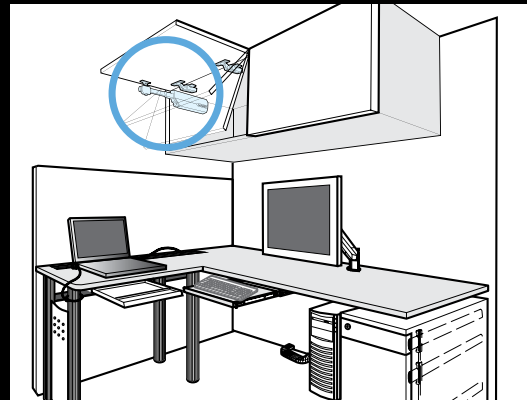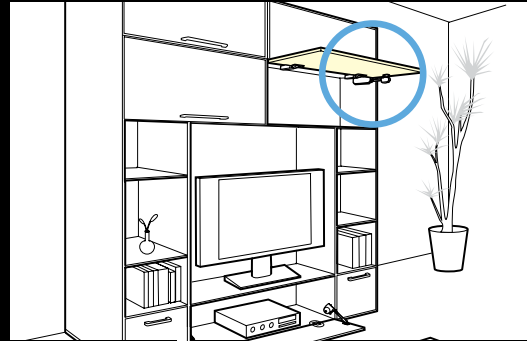

Arm Mounting Plate for Aluminum Frame Door



SLS-ELAN-AZ



Item No.	Type	Material	Finish	Box (pcs)	Carton (pcs)
SLS-ELAN-AZ	Mounting Plate	Steel	Nickel	20	200
SLS-ELAN-AZS	Screw Set			80	400

EASY LIFT-UP STAY




SLS-ELAN

LID SUPPORTS


EASY LIFT-UP STAYS




- For UPWARD-OPENING FLAP DOOR with concealed, piano, butt, or drop hinges.
- Designed to provide effortless opening and hold door in closed and opened position.
- Damper equipped for soft & silent closing.
- Optional bracket for aluminum frame door available.
- Single or pair use allows wide range of door sizes/weights.
- Handed left or right.

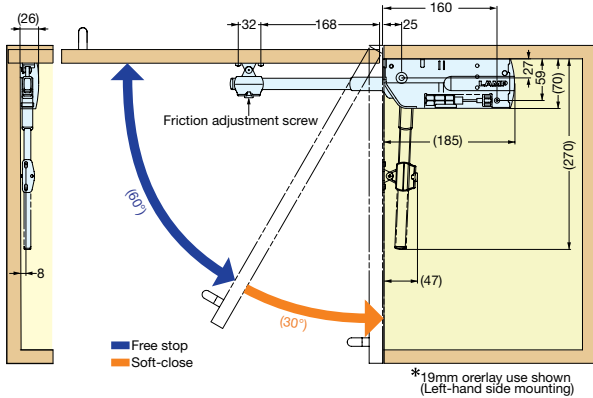

Easy Installation

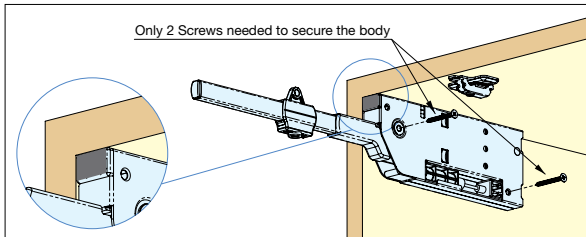

Adjustment

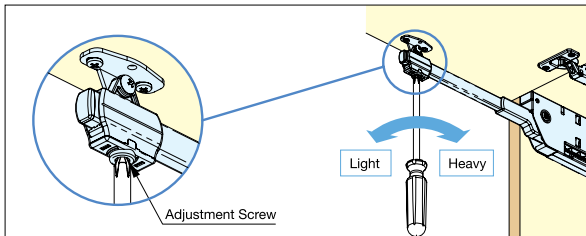

Door Weight Range Table (lbs.)

Door Height (inch)	Single use				Pair use			
	M-type		H-type		M-type		H-type	
	Min	Max	Min	Max	Min	Max	Min	Max
12"	8.0	10.8	10.8	14.5	16.0	21.7	21.7	29.0
13"	7.4	10.0	10.0	13.4	14.8	20.0	20.0	26.8
14"	6.9	9.3	9.3	12.4	13.7	18.6	18.6	24.9
15"	6.4	8.7	8.7	11.6	12.8	17.3	17.3	23.2
16"	6.0	8.1	8.1	10.9	12.0	16.3	16.3	21.8
17"	5.6	7.6	7.6	10.2	11.3	15.3	15.3	20.5
18"	5.3	7.2	7.2	9.7	10.7	14.4	14.4	19.3
19"	5.1	6.8	6.8	9.2	10.1	13.7	13.7	18.3
20"	4.8	6.5	6.5	8.7	9.6	13.0	13.0	17.4
21"	4.6	6.2	6.2	8.3	9.1	12.4	12.4	16.6
22"	4.4	5.9	5.9	7.9	8.7	11.8	11.8	15.8
23"	4.2	5.7	5.7	7.6	8.3	11.3	11.3	15.1
24"	4.0	5.4	5.4	7.3	8.0	10.8	10.8	14.5
25"	3.8	5.2	5.2	7.0	7.7	10.4	10.4	13.9
26"	3.7	5.0	5.0	6.7	7.4	10.0	10.0	13.4
27"	3.6	4.8	4.8	6.4	7.1	9.6	9.6	12.9
28"	3.4	4.6	4.6	6.2	6.9	9.3	9.3	12.4

* Single or pair use depending on door size and weight.



Item No.	Type	Torque per piece	Material	Finish/Color	Weight (g)	Box (pcs)	Carton (pcs)
SLS-ELAN-MR	Right	55~75 kg-cm (48~65 lbs-in)	• Aluminum • Steel • ABS	• Anodized • Galvanized • Light Grey	600	20	100
SLS-ELAN-ML	Left						
SLS-ELAN-HR	Right	75~100 kg-cm (65~87 lbs-in)					
SLS-ELAN-HL	Left						