## SUMMIT

# **SPR489OSCSSPNR**



#### 33.88" x 19" x 17.75" (H x W x D)

Commercially approved indoor/outdoor beverage cooler for built-in or freestanding use with a shallow 17.75" depth, panel-ready door trim, glass door, and stainless steel wrapped cabinet

#### **Highlights:**

Shallow depth under 18" makes it ideal for smaller commercial and residential settings

Designed and constructed for safe use in the outdoors

Panel-ready door frame allows you to create a truly custom look under the counter

#### **Product Features:**

Shallow depth	Unique 17 3/4" depth is ideal for home wet bars, island kitchens, and other applications with limited footprint space	
Built-in capable	Make the best use of space by installing your refrigerator under the counter	
Panel-ready door trim	Door frame can be customized with a custom overlay panel (panel frame dimensions: 31 9/16" H x 18 3/4" W at 3/4" minimum thickness)	
Weatherproof design	Approved for use in the outdoors, with a sealed exterior and double pane tempered glass door	
Commercially approved	ETL-S listed to NSF-7 standard and meets UL-471 for use in commercial settings	
Stainless steel wrapped exterior	Cabinet features 304 grade stainless steel construction for added durability and a professional look	
Double pane tempered glass door	Heat resistant design provides clear view of stored products	
Automatic defrost	Reduced user maintenance with auto defrost system	
Adjustable shelves	Three glass shelves with six positions for optimal storage and easy cleaning	

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

info@summitappliance.com


 $\checkmark$ 




### SPR489OSCSSPNR Specifications:

Overview	
Height of Cabinet	33.88" (86 cm
Width	19.0" (48 cm
Depth	17.75" (45 cm
Depth with door at 90°	34.75" (88 cm
Capacity	3.13 cu.ft. (89 L
Defrost Type	Automatio
Door	Glass/Panel-Read
Cabinet	Stainless Stee
US Electrical Safety	ETI
Canadian Electrical Safety	ETL-C
Sanitation	ETL-S
Energy Usage/Year	285.0kWh/yea
Amps	1.:
Voltage/Frequency	115 V AC/60 H
Weight	85.0 lbs. (39 kg
Shipping Weight	90.0 lbs. (41 kg
Parts & Labor Warranty	1 Yea
Compressor Warranty	5 Year
UPC	761101075082
Refrigerator Features	
Door Swing	RHE
Reversible	Factory Reversible
Height Adjustable	Ye
Shelf Type	Glass
Shelf Qty	;
Adjustable Shelves	Ye
Can Storage	Ye
Thermostat Type	Dia
Fan Type	Interio
Refrigerant Type	R600a
Refrigerant Amount	0.88oz
High Side PSI	320.0
	100
Low Side PSI	120.0
Low Side PSI Level Legs Qty	120.0

Temperature Range	34 to 50°F		
Sound Level	32.6 dB		
Dimensions			
Interior Height	29.0" (74 cm)		
Interior Width	16.0" (41 cm)		
Interior Depth	12.75" (32 cm)		
Compressor Step Height	7.0" (18 cm)		
Compressor Step Width	16.0" (41 cm)		
Compressor Step Depth	6.25" (16 cm)		

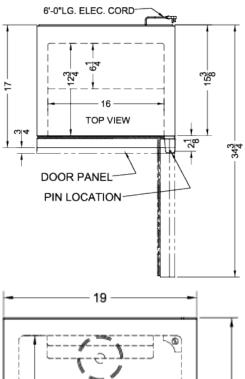

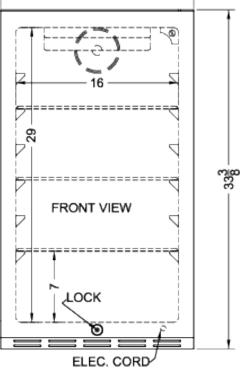

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

