SUMMIT

SBC682PNRTWIN



33.63" x 23.75" x 24.25" (H x W x D)

24" wide built-in indoor/outdoor full-sized kegerator with panel-ready door, stainless steel exterior, and complete commercial grade twin tap kit to serve from two 1/6 kegs

Highlights:

Meets residential guidelines for home wet bars and similar spaces

Designed for built-in installation under the counter

Customizable door accepts full overlay panels for a seamless look that can blend into cabinetry

Product Features:

| Large capacity kegerator | 5.6 cu.ft. interior can accept a full half barrel keg, two slim quarter kegs, or up to three sixth barrel or Cornelius style kegs | |
|---------------------------|---|--|
| Built-in capable | Front-breathing design allows fully recessed installation under counters | |
| Panel-ready door | Extended hinging allows you to install your own panel overlay on the door, creating a custom look to complement or blend into your own cabinetry (panel size: 29 3/4" H x 23 5/16" W at a 3/4" thickness) | |
| Indoor/Outdoor compatible | Weatherproof construction for safe use in the outdoors | |
| Durable design | Solid 304 grade stainless steel construction ensures long-lasting durability | |
| Complete tap kit | Includes a 5 lb. CO2 tank and regulator, dual tap draft arm, Sankey American tap, connection hardware, and cleaning kit | |
| Twin tap system | Twin draft tower allows you to serve from two slim quarter kegs | |
| Automatic defrost | Reduced user maintenance with auto defrost operation | |
| Digital thermostat | Electronic controls ensure easy temperature management, with an external readout in Celsius or Fahrenheit | |








SBC682PNRTWIN Specifications:

| Overview | |
|--|---|
| Height of Cabinet | 33.63" (85 cm) |
| Width | 23.75" (60 cm) |
| Depth | 24.25" (62 cm) |
| Depth with door at 90° | 46.75" (119 cm) |
| Capacity | 5.6 cu.ft. (159 L) |
| Defrost Type | Automatic |
| Door | Panel-Ready |
| Cabinet | Stainless Steel |
| US Electrical Safety | ETL |
| Canadian Electrical Safety | ETL-C |
| Sanitation | ETL-S |
| Energy Usage/Year | 305.0kWh/year |
| Amps | 1.25 |
| Voltage/Frequency | 115 V AC/60 Hz |
| Weight | 120.0 lbs. (54 kg) |
| Shipping Weight | 135.0 lbs. (61 kg) |
| Parts & Labor Warranty | 1 Year |
| Compressor Warranty | 5 Years |
| UPC | 761101083964 |
| Kegerator | |
| Door Swing | RHD |
| Reversible | Factory Reversible |
| | |
| Tap Kit | Yes |
| Tap Kit Height with Tap | Yes 51.5" (131 cm) |
| | |
| Height with Tap | 51.5" (131 cm) |
| Height with Tap Number of Taps | 51.5" (131 cm) |
| Height with Tap Number of Taps Adjustable Shelves | 51.5" (131 cm) 2 Yes |
| Height with Tap Number of Taps Adjustable Shelves Shelf Type | 51.5" (131 cm) 2 Yes Chrome |
| Height with Tap Number of Taps Adjustable Shelves Shelf Type Shelf Qty | 51.5" (131 cm) 2 Yes Chrome |
| Height with Tap Number of Taps Adjustable Shelves Shelf Type Shelf Qty Thermostat Type | 51.5" (131 cm) 2 Yes Chrome 2 Digital |
| Height with Tap Number of Taps Adjustable Shelves Shelf Type Shelf Qty Thermostat Type Fan Type | 51.5" (131 cm) 2 Yes Chrome 2 Digital Interior |
| Height with Tap Number of Taps Adjustable Shelves Shelf Type Shelf Qty Thermostat Type Fan Type Refrigerant | 51.5" (131 cm) 2 Yes Chrome 2 Digital Interior R600a |
| Height with Tap Number of Taps Adjustable Shelves Shelf Type Shelf Qty Thermostat Type Fan Type Refrigerant Refrigerant Amount | 51.5" (131 cm) 2 Yes Chrome 2 Digital Interior R600a 1.06 oz. |

| Interior Width | 20.0" (51 cm) |
|-------------------|----------------------------|
| Interior Depth | 19.0" (48 cm) |
| Level Legs Qty | 4 |
| Wheel Qty | 4 |
| Temperature Range | 34°F to 68°F (1°C to 20°C) |
| Sound Level | 34.0 db |

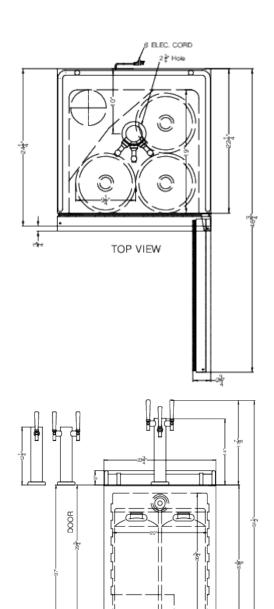





FRONT VIEW