

Location:



Kitchen Faucet S-2302-PD Specification Submittal



Model Number

- S-2302-PD Kitchen faucet

Finish Options / Modifications

Append appropriate -suffix to model number

- CG** -1.5 1.5 (5.7 L/min) flow rate restrictor
- CG** -1.0 1.0 (3.8 L/min) flow rate restrictor
- DP 8" deck plate
- BBZ Brushed Bronze finish
- MB Matte Black finish
- STS Stainless Steel finish

Warranty

- Limited Lifetime - to the original end purchaser in consumer installations
- 5 years - for commercial installations

Feature Highlights



- Single handle kitchen faucet with pull-down handspray spout and retractable hose
- Two mode handspray; standard stream and wide spray
- Spout has 360 degree rotation
- Ceramic control components
- Standard flow rate is 2.2 gpm (8.3 L/min)
Optional lower flow rate restrictor available
- Braided hose water supply connections
- Single hole mount
- Metal construction, polished chrome finish (standard)

Standards / Certifications

- ASME A112.18.1/CSA B.125.1
- NSF/ANSI 61.9; NSF/ANSI 372



Dimensions Sereno Kitchen Faucet, S-2302-PD

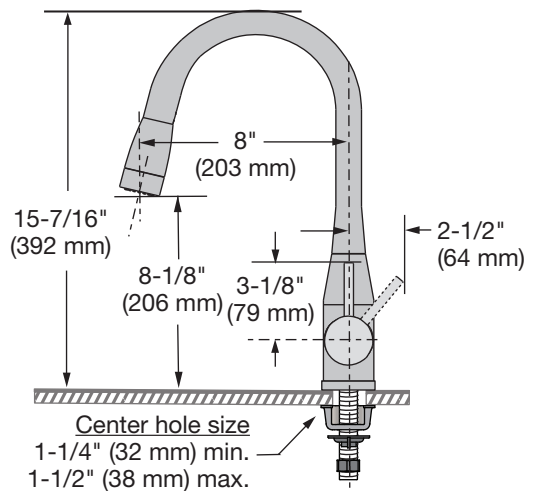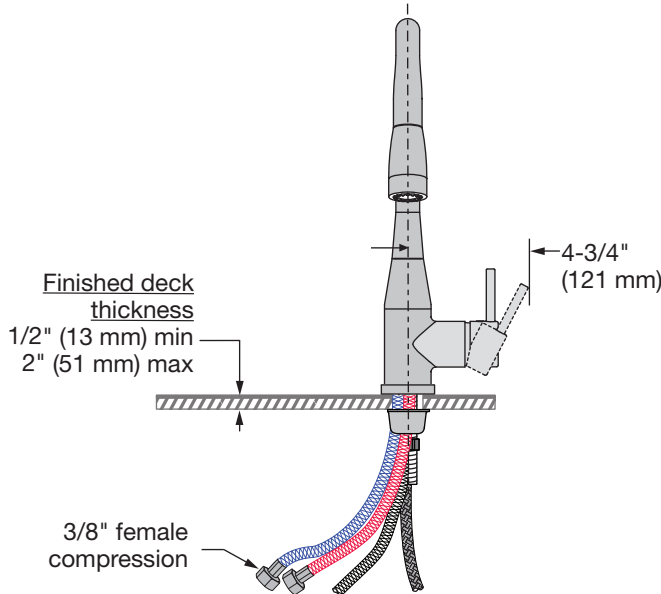

Note: Dimensions subject to change without notice
Braided supply hoses length approx. 21" (533 mm)

Emplacement:


SYMMONS® Sereno®
the smart choice™

Robinet de cuisine S-2302-PD Présentation des spécifications



Numéro de modèle

- S-2302-PD Robinet de cuisine

Options/modifications du fini

Joindre le -suffixe approprié au numéro de modèle

- CG** -1,5 Régulateur de débit de 5,7 L/min
- CG** -1,0 Régulateur de débit de 3,8 L/min
- DP Plaque de la base 203 mm (8 po)
- BBZ Fini bronze brossé
- MB Fini noir mat
- STS Fini acier inoxydable

Garantie

- Garantie à vie limitée - à l'acheteur initial dans les installations du client.
- 5 ans - pour les installations commerciales

Principales caractéristiques

- Robinet de cuisine mitigeur avec poignée de pulvérisation à tirer et tuyau rétractable
- Deux modes de pulvérisation; jet normal et jet large
- Le bec peut pivoter sur 360 degrés
- Composants des commandes en céramique
- Le débit standard est de 8,3 L/min (2,2 gpm)
Régulateur de débit faible en option disponible
- Raccords de l'alimentation en tuyau tressé
- Montage à trou unique
- Fabrication de métal, fini chrome poli (standard)

Normes/certifications

- ASME A112.18.1/CSA B.125.1
- NSF/ANSI 61.9; NSF/ANSI 372



Dimensions Robinet de cuisine Sereno, S-2302-PD

