

Location:



Shower System 3501-CYL-B

Specification Submittal



Standard Feature Highlights

- Shower System with Symmons Temptrol® pressure-balancing mixing valve with adjustable stop screw to limit handle turn
- Screwless brass escutcheon (-B)
- Showerhead, single mode #352SH
- Mounting bracket and flange for showerhead
- Standard flow rate is 2.5 gpm (9.5 L/min)
Optional lower flow rate restrictor available
- Polished chrome finish (standard)

Model Numbers

- 3501-CYL-B
Shower System with Symmons Temptrol® mixing valve p/n 4000-BODY
- 3501-CYL-B-TRM
Trim only, valve must be ordered separately
- 4000-BODY
Symmons Temptrol® mixing valve without trim
- 4000-X-BODY
Symmons Temptrol® valve without trim. Valve includes integral service stops to allow water shut-off for service

Finish Options / Modifications

Append appropriate -suffix to model number

- STN Satin nickel
- Polished chrome (standard finish)

Handle Options / Modifications

Append appropriate -suffix to model number



- LR Lever handle
- LP Loop style lever handle

Options / Modifications

Append appropriate -suffix to model number

- IPS IPS connections: 1/2 inch female IPS connections on Temptrol® mixing valve
- X Service Stops: Temptrol® mixing valve includes integral service stops to allow water shut-off for service, p/n 4000-X-BODY (available when ordering model 3501-CYL-B)
- CHKS Check Stops: Temptrol® mixing valve includes integral check stops (Requires integral service stop, suffix -X. Used in installations where a positive shut-off device is used downstream of mixing valve.)
- REV Reverse core: Temptrol® mixing valve with reverse core. (Requires integral service stop, suffix -X. Used in back-to-back system installations. HOT on the right, COLD on the left)
- Delete Suffix B Chrome plastic escutcheon chrome plastic escutcheon is supplied instead of standard brass escutcheon
- 2.0 Flow rate restrictor, 2.0 gpm (7.6 L/min)
- 1.5 Flow rate restrictor, 1.5 gpm (5.7 L/min)
- L/HD Showerhead not included, Includes mounting bracket and flange
- 352SH-3 Showerhead is three-mode in place of standard single mode


Standards / Certifications

ASME A112.18.1-2005 / CSA B125.1-05
Americans with Disabilities Act (ADA) compliant

Warranty

- Limited Lifetime - to the original end purchaser in consumer installations
- 5 years - for commercial installations

Dimensions Dia Shower System, 3501-CYL-B

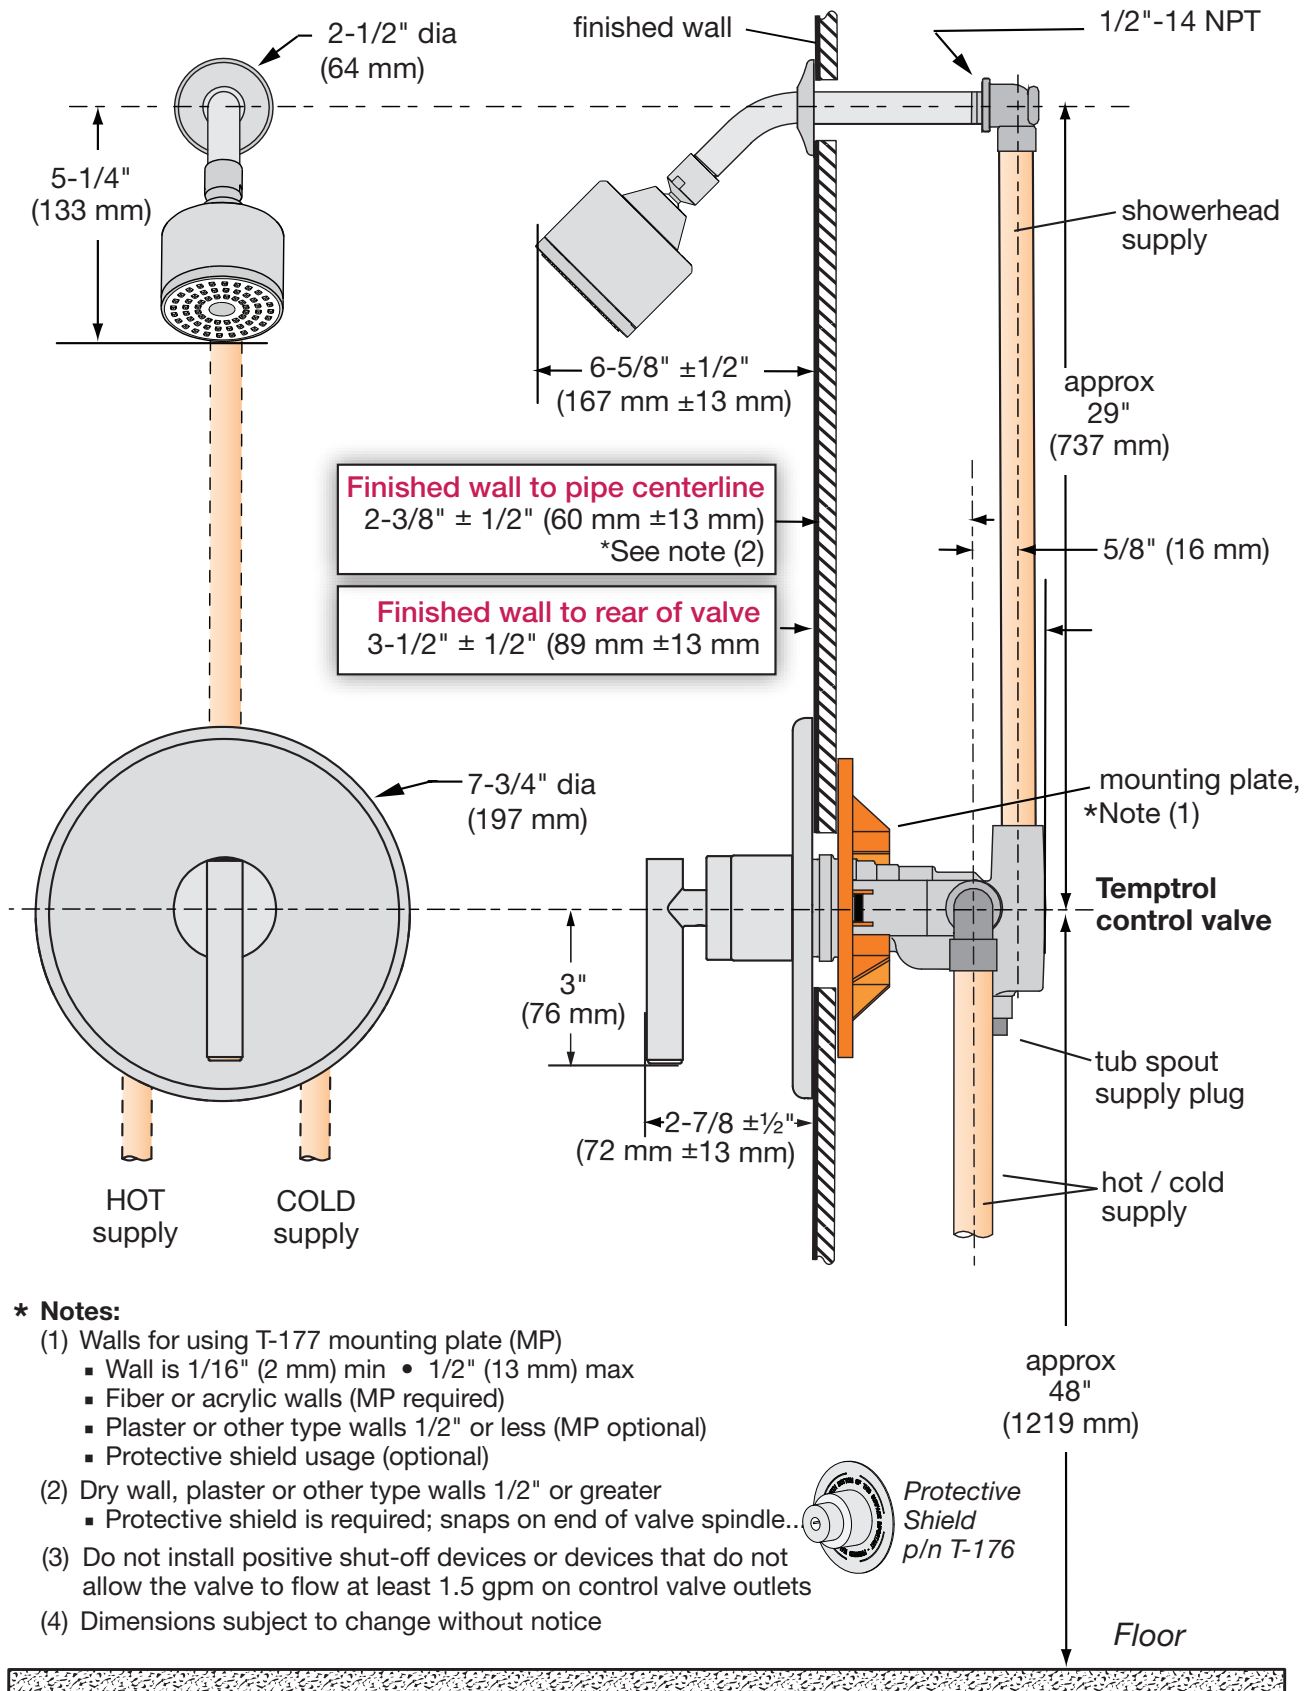

*** Notes:**

- (1) Walls for using T-177 mounting plate (MP)
 - Wall is 1/16" (2 mm) min • 1/2" (13 mm) max
 - Fiber or acrylic walls (MP required)
 - Plaster or other type walls 1/2" or less (MP optional)
 - Protective shield usage (optional)
- (2) Dry wall, plaster or other type walls 1/2" or greater
 - Protective shield is required; snaps on end of valve spindle..
- (3) Do not install positive shut-off devices or devices that do not allow the valve to flow at least 1.5 gpm on control valve outlets
- (4) Dimensions subject to change without notice