

Location:



Tub-Shower & Hand Shower System 3506-H321-V-CYL-B Specification Submittal



Feature Highlights

- Symmons Shower-Hand Shower System with Symmons Temptrol® pressure-balancing mixing valve with adjustable stop screw to limit handle turn
- Screwless brass escutcheon (-B)
- Cylinder (-CYL) style lever handles
- Separate triple outlet diverter valve
- Showerhead, single mode #352SH
- Mounting bracket and flange for showerhead
- Standard flow rate is 2.5 gpm (9.5 L/min)
Optional lower flow rate restrictor available
- Wall/hand shower, single mode, #H321-V with 5 foot flexible metal hose, in-line vacuum breaker, wall connection
- 30 inch slide bar and cradle for hand shower mounting
- Tub spout #067
- Polished chrome finish (standard)

Model Numbers

- ☐ 3506-H321-V-CYL-B
Tub-Hand Shower System with Symmons Temptrol® mixing valve p/n 4000-BODY
- ☐ 3506-H321-V-CYL-B-TRM
Trim only, valve must be ordered separately
- ☐ 4000-BODY
Symmons Temptrol® mixing valve without trim
- ☐ 4000-X-BODY
Symmons Temptrol® mixing valve without trim. Valve includes integral service stops
- ☐ 3DIV-BODY
Symmons triple outlet diverter valve without trim

Handle Options / Modifications

Append appropriate -suffix to model number



- ☐ -LR Lever handle
- ☐ -LP Loop style lever handle

Warranty

- 5 years - for commercial installations

Options / Modifications

Append appropriate -suffix to model number

- ☐ -IPS IPS connections: 1/2 inch female IPS connections on Temptrol® mixing valve
- ☐ -X Service Stops: Temptrol® mixing valve includes integral service stops to allow water shut-off for service, p/n 4000-X-BODY (available when ordering 3506-H321-V-CYL-B)
- ☐ -CHKS Check Stops: Temptrol® mixing valve includes integral check stops (Requires integral service stops, suffix -X. Used in installations where a positive shut-off device is used downstream of mixing valve.)
- ☐ -REV Reverse core: Temptrol® mixing valve with reverse core. (Requires integral service stops, suffix -X. Used in back-to-back system installations. HOT on the right, COLD on the left)
- ☐ Delete Suffix B Chrome plastic escutcheon chrome plastic escutcheon is supplied instead of standard brass escutcheon
- ☐ 352SH-3 Showerhead is three-mode in place of standard single mode
- ☐ -2.0 Flow rate restrictor, 2.0 gpm (7.6 L/min)
- ☐ -1.5 Flow rate restrictor, 1.5 gpm (5.7 L/min)
- ☐ -L/HS Hand Shower wand not included, Includes hose, in-line vacuum breaker, wall connections and flange only
- ☐ -L/HD Showerhead not included, Includes mounting bracket and flange
- ☐ -QD Quick-disconnect on hand shower
- ☐ -72 6 foot metal hose in place of 5 foot hose
- ☐ -R60 Vinyl 5 foot hose in place of metal hose
- ☐ -R72 Vinyl 6 foot hose in place of metal hose
- ☐ -SS Slip-on tub spout instead of standard spout
- ☐ -T24 24 inch grab bar assembly
- ☐ -T36 36 inch grab bar assembly

Finish Options / Modifications

Append appropriate -suffix to model number


- ☐ -STN Satin nickel
- Polished chrome (standard finish)

Standards / Certifications

ASME A112.18.1/CSA B125.1

Americans with Disabilities Act (ADA) compliant

Dimensions Dia Tub-Shower & Hand Shower, 3506-H321-CYL-B

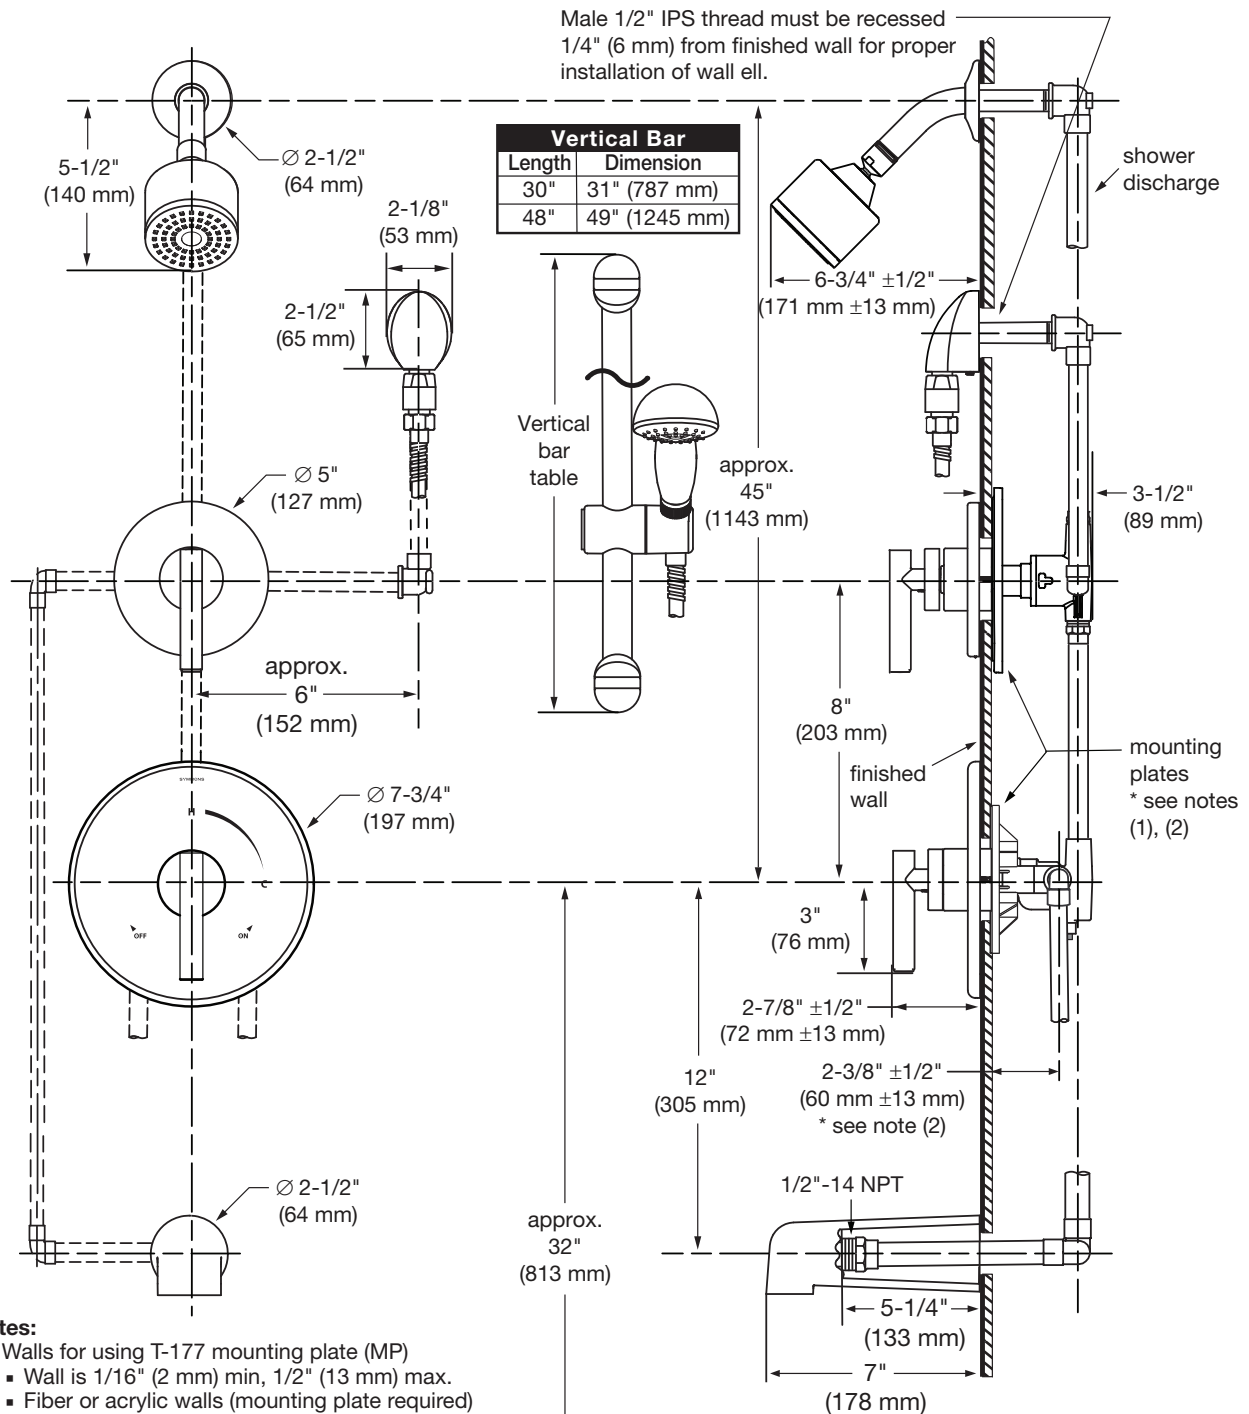

* Notes:

- (1) Walls for using T-177 mounting plate (MP)
 - Wall is 1/16" (2 mm) min, 1/2" (13 mm) max.
 - Fiber or acrylic walls (mounting plate required)
 - Plaster or other type walls 1/2" or less (MP optional)
 - Using protective shield (optional)
- (2) Dimension applies when *mounting plate* is not used.
- (3) Dry wall, plaster or other type walls 1/2" or greater is required to use protective shield; snap on end of valve spindle.....
- (4) Dimensions subject to change without notice

