

Location:



# Shower-Hand Shower System 5505 Specification Submittal



## Feature Highlights

- Symmons Shower-Hand Shower System with lever handles
- Symmons Temptrol® pressure-balancing mixing valve with adjustable stop screw to limit handle turn
- Screwless escutcheon
- Separate dual outlet diverter valve with lever handle
- Showerhead #552SH three mode, 4 inch diameter
- Showerhead mounting bracket and flange
- Wall/hand shower #552HS, three mode, with 5 foot flexible metal hose, dual checks, wall connection and cradle for hand shower mounting
- Standard flow rate is 2.5 gpm (9.5 L/min)  
*Optional lower flow rate restrictor available*
- Polished chrome finish (standard)

## Model Numbers

- 5505  
Shower-Hand Shower System with Symmons Temptrol® mixing valve p/n 4000-BODY and dual outlet diverter p/n 2DIV-BODY
- 5505-TRM  
Trim only, valve and diverter ordered separately
- 4000-BODY  
Symmons Temptrol® mixing valve without trim
- 4000-X-BODY  
Symmons Temptrol® mixing valve without trim. Valve includes integral service stops to allow water shut-off for service
- 2DIV-BODY  
Symmons dual outlet diverter valve without trim

## Finish Options / Modifications

*Append appropriate -suffix to model number*

- STN Satin Nickel
- SBZ Seasoned Bronze
- Polished Chrome (standard finish)

## Standards / Certifications

ASME A112.18.1/CSA B125.1

Americans with Disabilities Act (ADA) compliant

## Options / Modifications


*Append appropriate -suffix to model number*

- IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- X Integral service stops included with Temptrol mixing valve to allow water shut-off for service, p/n 4000-X-BODY (*Option only applies when ordering model 5506*)
- CHKS Check Stops: Temptrol® mixing valve includes integral check stops (*Requires integral service stops, suffix -X. Used in installations where a positive shut-off device is used downstream of mixing valve.*)
- REV Reverse core: Temptrol® mixing valve with reverse core. (*Requires integral service stops, suffix -X. Used in back-to-back system installations. HOT on the right, COLD on the left*)
- 2.0 2.0 gpm (7.6 L/min) flow rate restrictor
- 1.5 1.5 gpm (5.7 L/min) flow rate restrictor
- L/HD Showerhead not included (*includes showerhead arm and flange only*)
- L/HS Hand Shower wand not included (*includes hose, in-line vacuum breaker, wall connections and flange only*)
- 552HSB 30" slide bar in place of wall cradle on hand shower units
- 48 48 inch slide bar instead of 30 inch when ordering 552HSB Hand Shower
- 72 6 foot flexible metal hose in place of 5 foot
- R60 5 foot vinyl hose in place of flexible metal hose
- R72 6 foot vinyl hose in place of flexible metal hose
- QD Quick-disconnect at hand shower wall connection

## Warranty

- Limited Lifetime - to the original end purchaser in consumer installations
- 5 years - for commercial installations

# Dimensions Elm Shower-Hand Shower System, 5505

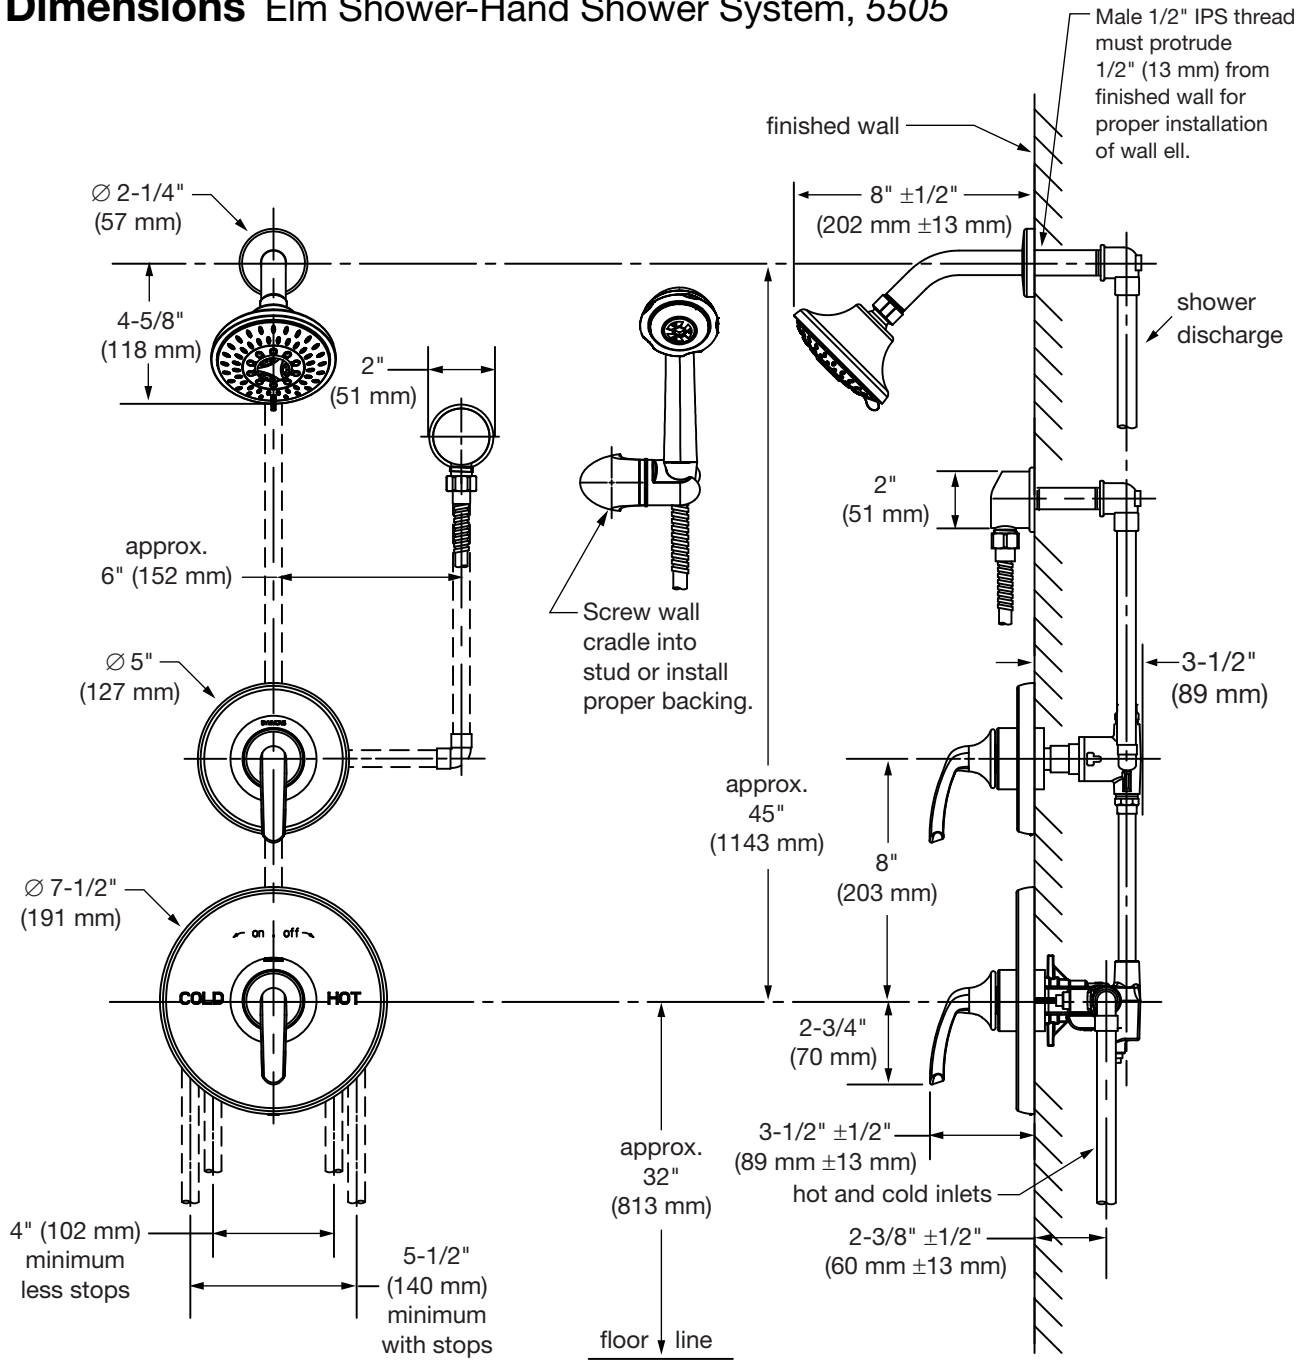

**Note:** Dimensions subject to change without notice