

Location:




SYMMONS® Dia™

Tub-Shower System S-3502-CYL-B

Specification Submittal



Feature Highlights

- Symmons Tub-Shower System with Symmons Temptrol® pressure-balancing mixing valve with adjustable stop screw to limit handle turn
- Screwless brass escutcheon (-B)
- Cylinder (-CYL) style lever handle
- Showerhead, single mode #352SH
- Mounting bracket and flange for showerhead
- Standard flow rate is 2.5 gpm (9.5 L/min)
Optional lower flow rate restrictor available 
- Tub-spout 7 inches #067
- Polished chrome finish (standard)

Model Numbers

- S-3502-CYL-B
Tub-Shower System with Symmons Temptrol® mixing valve p/n S-4002-BODY
- S-3502-CYL-B-TRM
Trim only, valve must be ordered separately
- S-4002-BODY
Symmons Temptrol® mixing valve without trim
- S-4002-X-BODY
Symmons Temptrol® valve without trim. Valve includes integral service stops to allow water shut-off for service

Finish Options / Modifications

Append appropriate -suffix to model number

- STN Satin nickel
- Polished chrome (standard finish)

Standards / Certifications



ASME A112.18.1; CSA B125.1
Americans with Disabilities Act (ADA) compliant

Warranty

- Limited Lifetime - to the original end purchaser in consumer installations
- 5 years - for commercial installations

Options / Modifications

Append appropriate -suffix to model number

- IPS IPS connections: 1/2 inch female IPS connections on Temptrol® mixing valve
- X Service Stops: Temptrol® mixing valve includes integral service stops to allow water shut-off for service, p/n S-4002-X-BODY (Available when ordering model S-3502-CYL-B)
- CHKS Check Stops: Temptrol® mixing valve includes integral check stops (Requires integral service stops, suffix -X. Used in installations where a positive shut-off device is used downstream of mixing valve.)
- REV Reverse core: Temptrol® mixing valve with reverse core. (Requires integral service stops, suffix -X. Used in back-to-back system installations. HOT on the right, COLD on the left)
- Delete Suffix B Chrome plastic escutcheon chrome plastic escutcheon is supplied instead of standard brass escutcheon
-  -2.0 Flow rate restrictor, 2.0 gpm (7.6 L/min)
-  -1.5 Flow rate restrictor, 1.5 gpm (5.7 L/min)
- L/HD Showerhead not included, Includes mounting bracket and flange
- 352SH-3 Showerhead is three-mode in place of standard single mode
- SS Slip-on tub spout instead of standard #067


Handle Options / Modifications

Append appropriate -suffix to model number



- LR Lever handle
- LP Loop style lever handle

Dimensions Dia Tub-Shower Systems, S-3502-CYL-B

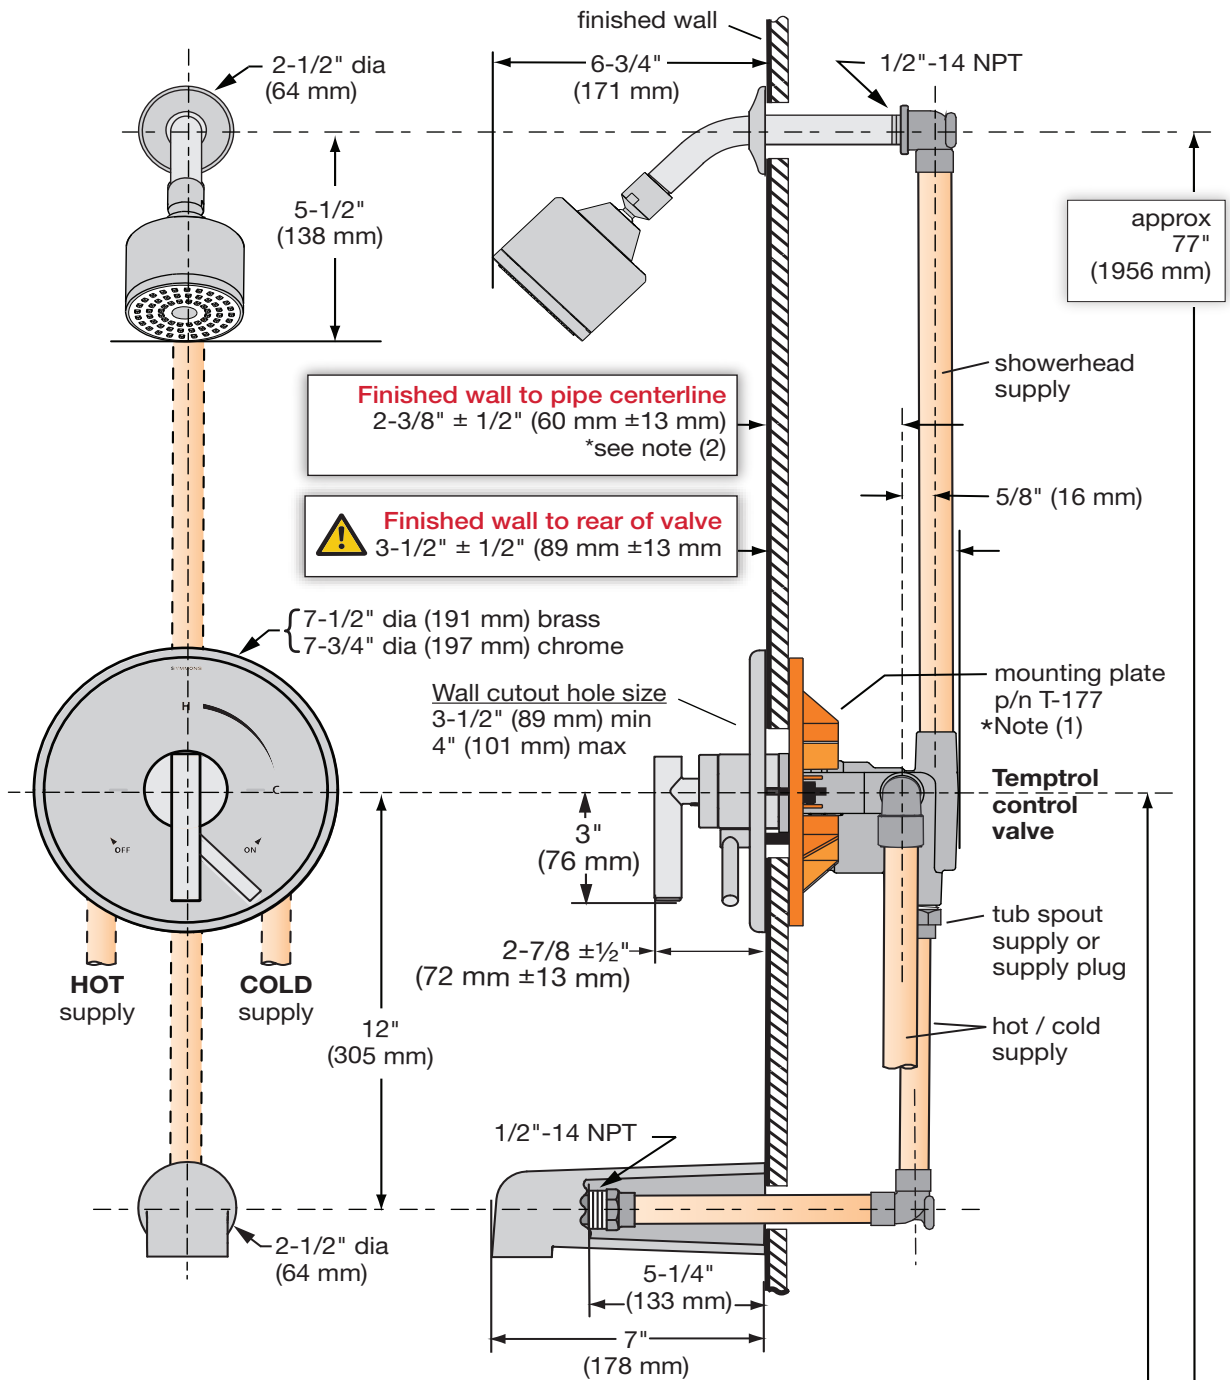

*** Notes:** (also reference page 2, figure 2 for details)

- (1) Walls for using T-177 mounting plate (MP)
 - Wall thickness is 1/16" (2 mm) min • 1/2" (13 mm) max
 - Fiber or acrylic walls (MP is required)
 - Plaster or other type walls 1/2" or less (MP optional)
 - Protective shield usage (optional for protection only)
- (2) Dry wall, plaster or other type walls 1/2" or greater
 - Protective shield attached to valve spindle to locate position
- (3) Dimensions subject to change without notice



Floor