



Location:



SYMMONS® Elm™
Tub-Shower System S-5502
Specification Submittal



Feature Highlights

- Symmons Tub and Shower System with lever handle
- Symmons Temptrol® pressure-balancing mixing valve with adjustable stop screw to limit handle turn
- Screwless escutcheon
- Secondary integral diverter/volume control handle
- Showerhead #552SH three mode, 4 inch diameter
- Showerhead arm and flange
- Standard flow rate is 2.5 gpm (9.5 L/min)
Optional lower flow rate restrictor available 
- Tub spout, #552TS
- Polished chrome finish (standard)

Model Numbers

- S-5502
Tub-Shower System with Symmons Temptrol® mixing valve p/n S-4002-BODY
- S-5502-TRM
Trim only, mixing valve ordered separately
- S-4002-BODY
Symmons Temptrol® mixing valve without trim
- S-4002-X-BODY
Symmons Temptrol® mixing valve without trim. Valve includes integral service stops to allow water shut-off for service



Finish Options / Modifications

Append appropriate -suffix to model number

- STN Satin Nickel
- SBZ Seasoned Bronze
- Polished Chrome (standard finish)

Options / Modifications

Append appropriate -suffix to model number

- IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
(not available with -X integral service stops)
- X Integral service stops included with Temptrol mixing valve to allow water shut-off for service, p/n S-4002-X-BODY *(option only applies when ordering model S-5502)*
- CHKS Check Stops: Temptrol® mixing valve includes integral check stops
(Requires integral service stops, suffix -X. Used in installations where a positive shut-off device is used downstream of mixing valve.)
- REV Reverse core: Temptrol® mixing valve with reverse core. *(Requires integral service stops, suffix -X. Used in back-to-back system installations. HOT on the right, COLD on the left)*
- L/HD Showerhead not included
(includes showerhead arm and flange only)
-  -2.0 2.0 gpm (7.6 L/min) flow rate restrictor
-  -1.5 1.5 gpm (5.7 L/min) flow rate restrictor


Standards / Certifications

ASME A112.18.1-2005 / CSA B125.1-05
Americans with Disabilities Act (ADA) compliant

Warranty

- Limited Lifetime - to the original end purchaser in consumer installations
- 5 years - for commercial installations

Dimensions Elm Tub-Shower System, S-5502

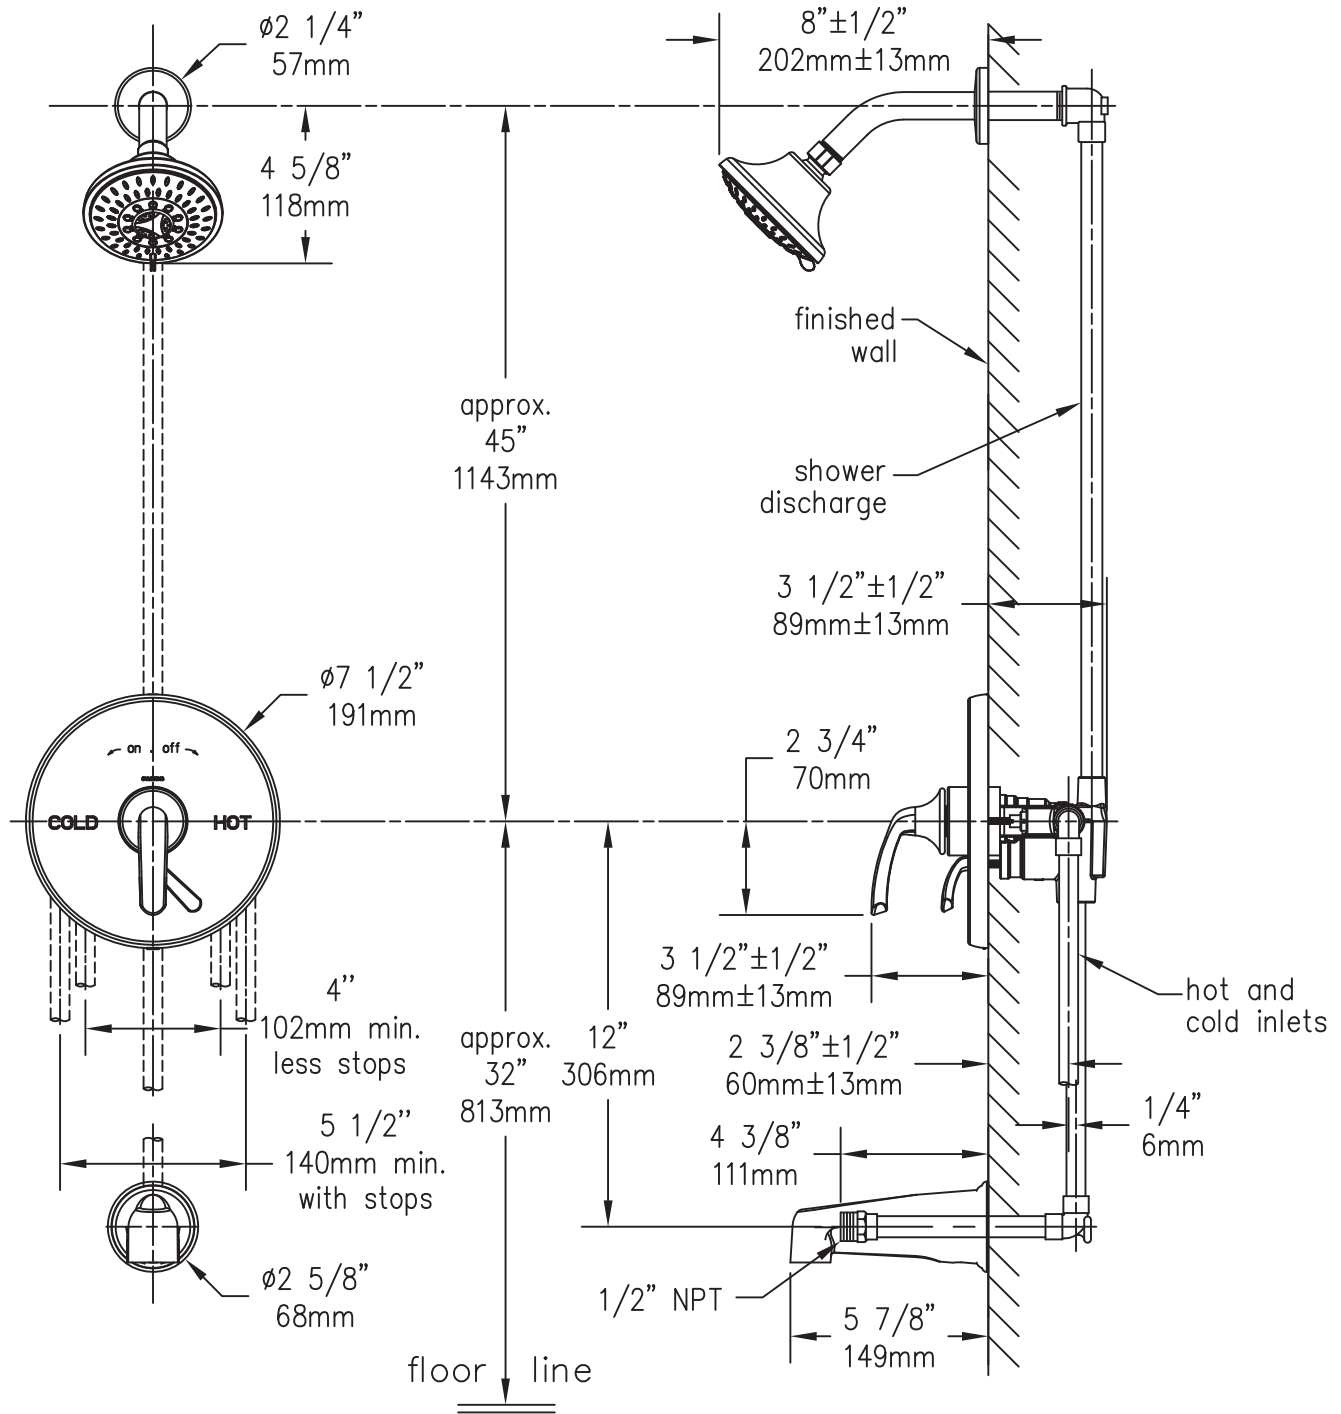

Note: Dimensions subject to change without notice