







Location:


Identity™



S-6704 Tub/Hand Shower System Specification Submittal

Model Numbers	Specification
<input type="checkbox"/> S-6704 <i>Identity Tub/Hand Shower System</i>	<p>Tub/hand shower system powered by the Temptrol® pressure-balancing valve. Features adjustable stop screw to limit handle turn, integrated diverter, non-diverter tub spout, wall elbow, in-line vacuum breaker, 60" flexible metal hose, hand shower cradle, 1 mode hand shower and standard 2.5 gpm (9.5 L/min) flow restrictor. Components made from metal and nonmetallic materials, plated in standard polished chrome finish.</p> 
<p>Modifications</p> <ul style="list-style-type: none"> <input type="checkbox"/> -1.5  1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> -2.0  2.0 gpm (7.6 L/min) flow restrictor <input type="checkbox"/> -72 6' metal hose in place of 5' standard metal hose <input type="checkbox"/> -B30 30" slide bar in place of wall cradle <input type="checkbox"/> -B48 48" slide bar in place of wall cradle <input type="checkbox"/> -CHKS Integral check stops - for use in installations where a positive shut-off device is used downstream of mixing valve <input type="checkbox"/> -IPS 1/2" female IPS connections <input type="checkbox"/> -L/HS Less hand shower <input type="checkbox"/> -LP Loop handle <input type="checkbox"/> -LR Lever handle <input type="checkbox"/> -OP 13" oval plate <input type="checkbox"/> -QD Quick disconnect on hand shower units <input type="checkbox"/> -R White vinyl hose in place of metal hose <input type="checkbox"/> -REB-TRM Rebuild trim kit <input type="checkbox"/> -REV Reverse coring, hot on right, cold on left, for back to back installations <input type="checkbox"/> -SS Slip spout on any tub/hand shower unit <input type="checkbox"/> -STN Satin Nickel finish <input type="checkbox"/> -T724 24" slide / grab bar with ADA hand shower in place of standard hand shower unit <input type="checkbox"/> -T736 36" slide / grab bar with ADA hand shower in place of standard hand shower unit <input type="checkbox"/> -TRM Trim only, valve not included <input type="checkbox"/> -X Integral service stops - allows water shutoff at valve for service <p>Note: Append appropriate -suffix to model number.</p>	
Compliance	
<p>-ASME A112.18.1/CSA B125.1 -WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)</p> 	
Warranty	
<p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 5 Years - for industrial/commercial installations. Refer to www.symmons.com/warranty for complete warranty information.</p>	

Dimensions

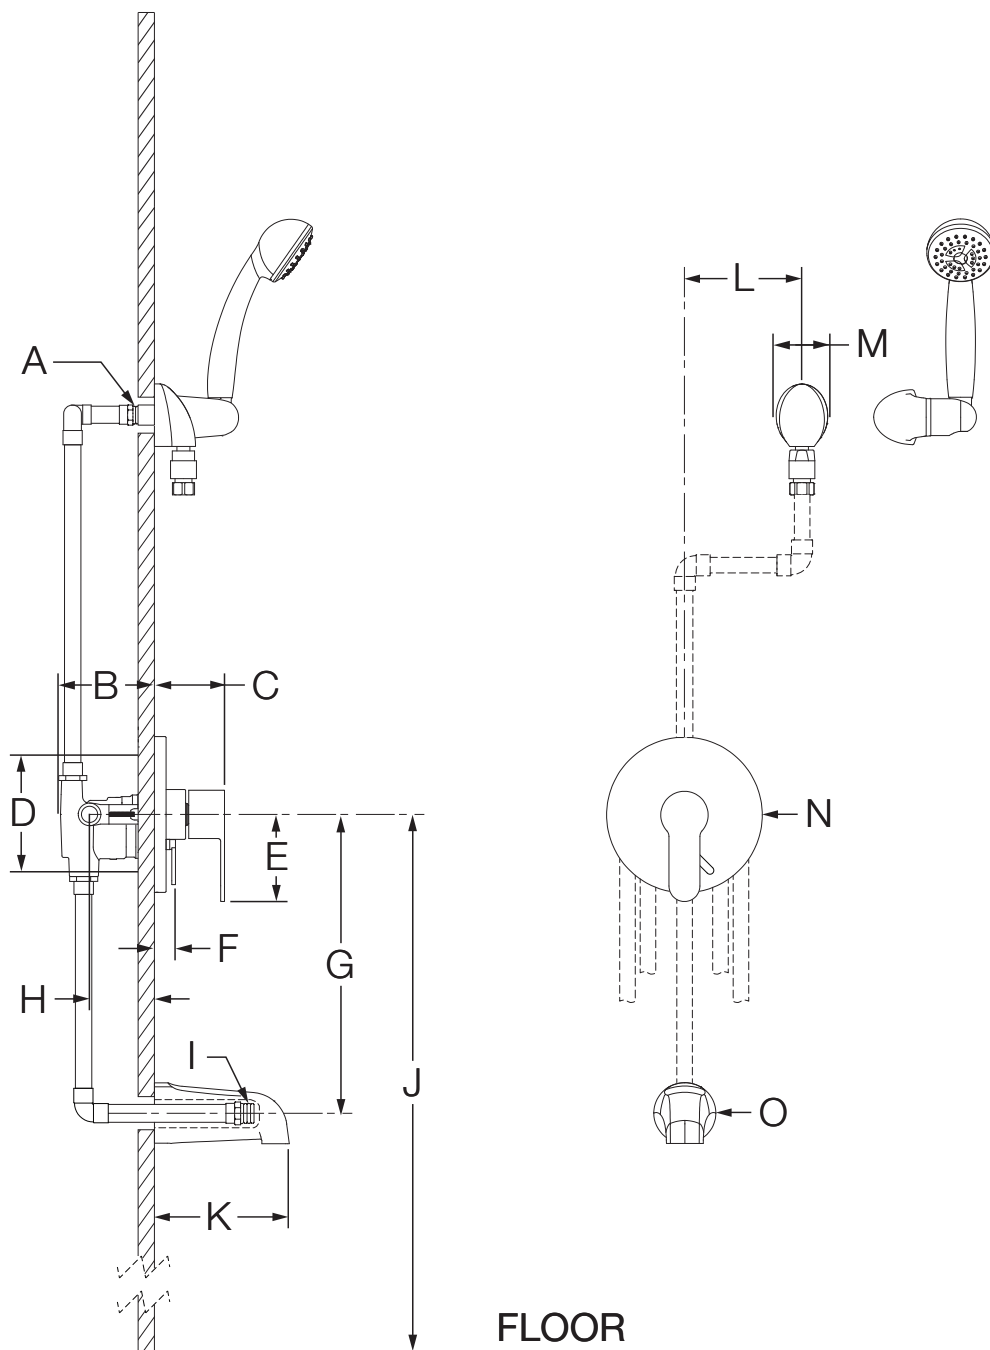

Measurements	
A	Male 1/2" NPT fitting must be recessed 1/4" (6 mm) from finished wall
B	3-1/2", 89 mm
C	2-7/8", 73 mm
D	Shower Valve Hole Size Min. Ø 3", 76 mm Max. Ø 4", 102 mm
E	3-1/2", 89 mm
F	7/8", 22 mm
G	12", 305 mm
H	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
I	Male 1/2" NPT fitting must protrude 4" (102 mm) from finished wall
J	Ref. 32", 813 mm
K	5-1/2", 140 mm
L	6", 152 mm
M	2-1/8", 54 mm
N	Ø 6-3/8", 162 mm
O	Ø 2-1/2", 64 mm

Notes:

- 1) All dimensions measured from nominal rough-in (see H as reference).
- 2) Dimensions subject to change without notice.