







Location:


**SYMMONS<sup>®</sup> Duro<sup>™</sup>**  
the smart choice<sup>™</sup>

SLW-3622-1.5  
Two Handle Widespread Lavatory Faucet  
**Specification Submittal**



Model Numbers	Specifications
<input type="checkbox"/> <b>SLW-3622-1.5</b> <i>Duro Two Handle Widespread Lavatory Faucet</i>	<p>Two handle widespread lavatory faucet featuring an 8" to 16" mounting configuration. Includes ceramic cartridges, 1/2" IPS inlet connections, metal drain assembly and standard 1.5 gpm (5.7 L/min) aerator. Components made from brass and nonmetallic materials plated in standard polished chrome finish.</p> 
Modifications	Compliance
<input type="checkbox"/> <b>-H2</b> <i>Wide, square lever handles</i> <input type="checkbox"/> <b>-H3</b> <i>Stacked, square lever handles</i>	<p>-ASME A112.18.1/CSA B125.1          -NSF/ANSI 61.9, NSF/ANSI 372          -WaterSense 1.5 gpm (5.7 L/min)</p>  
<p><b>Note:</b> Append appropriate -suffix to model number.</p>	Warranty
	<p><b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations.  <b>5 Years</b> - for industrial/commercial installations.</p> <p>Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.</p>

## Dimensions

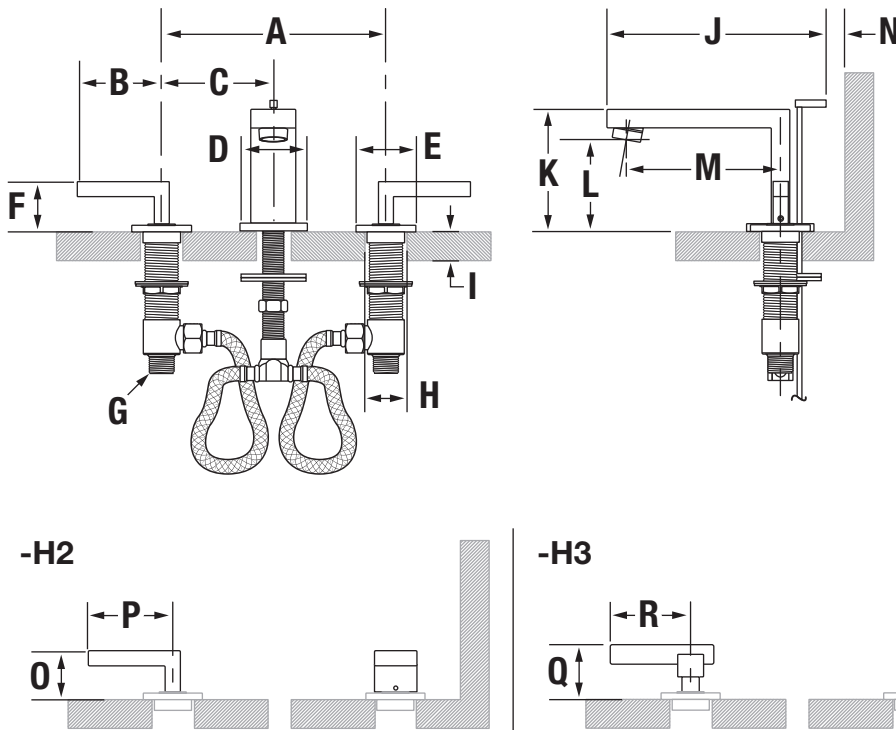

Measurements	
A	Min. 8", 203 mm Max. 16", 406 mm
B	2 3/4", 70 mm
C	4", 102 mm min.
D	2 1/8", 54 mm
E	2", 51 mm
F	1 5/8", 40 mm
G	1/2-14 NPSM
H	(3x) Hole size Min. Ø 1 1/4", 32 mm Max. Ø 1 3/8", 35 mm
I	Deck Thickness Ref. Min. 7/8", 22 mm Max. 2 3/8", 60 mm
J	6 3/8", 162 mm
K	4", 102 mm
L	3", 76 mm
M	5", 127 mm
N	1 1/2", 38 mm
O	1 5/8", 41 mm
P	2 3/4", 70 mm
Q	1 3/4", 44 mm
R	2 5/8", 67 mm

**Note:** Dimensions are subject to change without notice.