

Location:






# SYMMONS® Duro®


the smart choice™

S-3601  
Shower System  
**Specification Submittal**




Model Numbers	Specification
<input type="checkbox"/> <b>S-3601</b> <i>Shower System</i>	<p>Shower system powered by the Temptrol® pressure balancing valve. Features adjustable stop screw to limit handle turn, integrated volume control, 1 mode showerhead with easy to clean rubber nozzles and standard 2.5 gpm (9.5 L/min) flow restrictor. Components made from metal and nonmetallic materials, plated in standard polished chrome finish.</p> <div style="text-align: right;"></div>
Modifications	Compliance
<input type="checkbox"/> <b>-1.5</b>  <i>1.5 gpm (5.7 L/min) flow restrictor</i> <input type="checkbox"/> <b>-SH1</b> <i>Round, 1 mode showerhead</i> <input type="checkbox"/> <b>-SH2</b> <i>Round, 3 mode showerhead</i> <input type="checkbox"/> <b>-SH4</b> <i>Square, 1 mode showerhead</i> <input type="checkbox"/> <b>-TRM</b> <i>Trim only, valve not included</i>	<p>-ASME A112.18.1/CSA B125.1</p> <div style="text-align: right;"></div>
	Warranty
	<p><b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations.  <b>5 Years</b> - for industrial/commercial installations.  Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.</p>
<p><b>Note:</b> Dimensions subject to change without notice.</p>	

## Dimensions

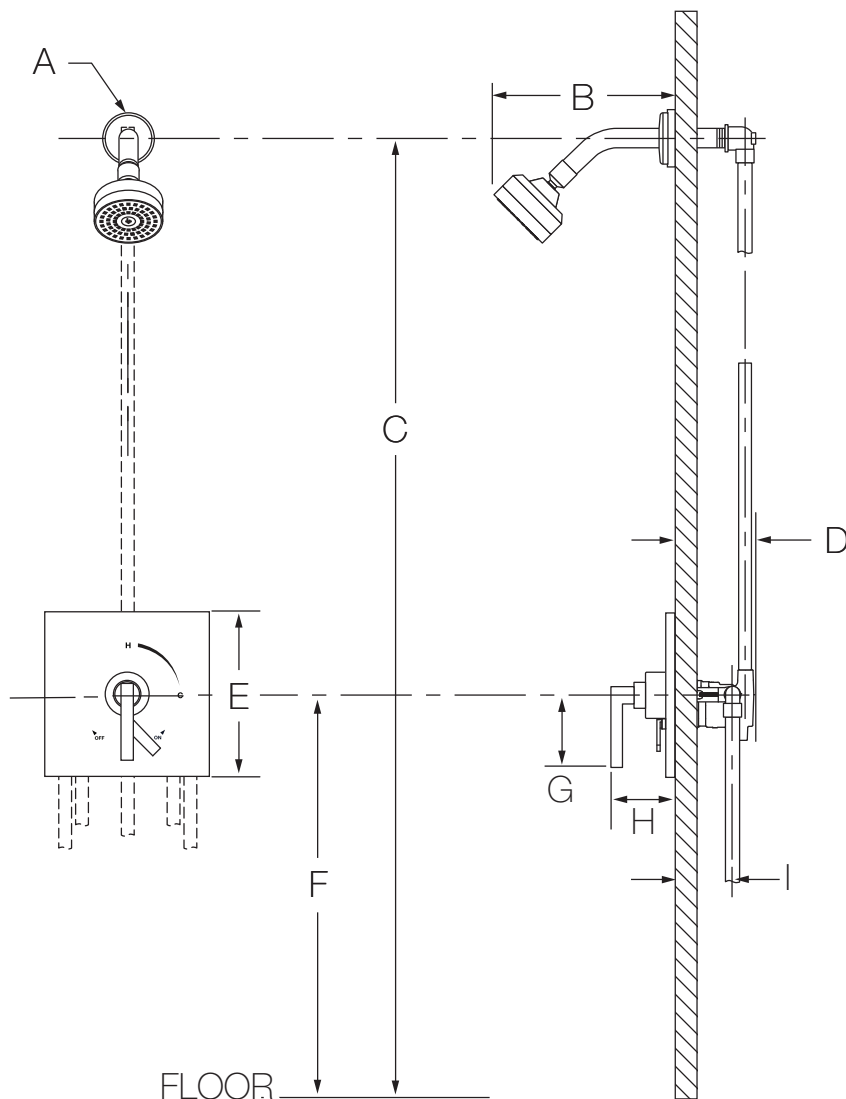


Measurements	
A	Ø 2-1/2", 64 mm
B	6", 152 mm
C	Ref. 77", 1956 mm
D	3-1/2", 89 mm
E	7-1/2", 191 mm
F	Ref. 42", 1067 mm
G	3-1/8", 79 mm
H	3-1/2", 89 mm
I	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
J	6-3/4", 171 mm
K	6-3/4", 171 mm
L	5-5/8", 143 mm



**-SH1**



**-SH2**



**-SH4**



### Notes:

- 1) All dimensions measured from nominal rough-in (see I as reference).
- 2) Dimensions subject to change without notice.