




SYMMONS® Verity®

Location:



S4991TRM
Shower Trim
Specification Submittal

Model Numbers

- S4991TRM**
Shower Trim, Temptrol Pressure Balancing Shower Valve ordered separately

Feature Highlights

- Requires Temptrol® Pressure Balancing Shower Valve
- Metal lever handle
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap
- 2.0 GPM (7.6 L/min) flow rate standard
- Integral volume control

Compliance

- ASME A112.18.1/CSA B125.1
- Lever handle meets ADA requirements




Options/Modifications

- MB** Matte Black finish
- STN** Satin Nickel finish
- 15** 1.5 GPM (5.7 L/Min) aerator
- L1** Less showerhead
- L7** Less handle
- TC** With TA-10 flow control spindle + T-12A Assembly

Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.

10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



SKU Builder




Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
S4991	STN	L7	15	TRM		S4991STNL115TRM
S4991	MB			TRM	TC	S4991MBTRMTC

Note: No more than two modifiers (L1-L7) and modifier order will follow numerical order.

Architectural/Engineering Specification

Symmons _____ Includes Verity shower trim powered by the Temptrol® Pressure Balancing Shower Valve, featuring metal lever handle, integral volume control, and 1 mode showerhead with standard 2.0 gpm (7.6 L/min) flow restrictor. Components made from metal and nonmetallic materials plated in standard polished chrome finish. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant and lever handle meets ADA requirements. Available options: "15 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L7 - Less handle", "STN - Satin Nickel finish", "MB - Matte Black finish", "TC - Test Cap Trim".


Dimensions

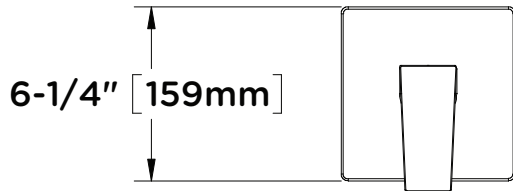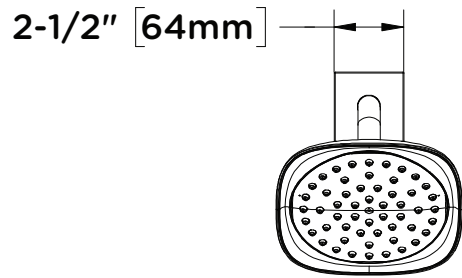

Rough-in:

2-3/8" ± 1/2" [60mm ± 13]

3-3/8" [85mm]



3-1/2" [89mm]

Notes:

- 1) All dimensions measured from nominal rough-in.
- 2) Dimensions are subject to change without notice.