

S3598BTRM
Shower/Hand Shower Trim
Specification Submittal

Location:

Model Numbers

- S3598BTRM**
Shower/ Handshower Trim
- Valve Options:**
- S262 Series Temptrol Shower Valve with TRM modifier
- S162 Series Temptrol Shower Valve requires TC modifier

Feature Highlights

- Dia Shower/Hand Shower Trim.
- Requires Temptrol® Pressure Balancing Tub/Shower Valve.
- Integral diverter control.
- Metal lever handle.
- 30" slide bar for hand shower wand.
- Dual checks for backflow protection.
- 60" flexible metal hose.
- 7 mode hand shower wand.
- 7 mode showerhead.
- 2.0 gpm (7.6 L/min) flow restrictors.
- Components shall be metal and nonmetal construction, plated in standard polished chrome finish.

Compliance

- ASME A112.18.1/CSA B125.1
- WaterSense 1.5 gpm (5.7 L/min) 1.75 gpm (6.6 L/MIn) 2.0 gpm (7.6 L/min)
- Hand shower and hand lever meet ADA requirements




Options/ Modifications

- 15** 1.5 gpm (5.7 L/min) flow restrictor
- 175** 1.75 gpm (6.6 L/min) flow restrictor
- Delete Suffix B** Chrome plastic escutcheon on valve with color graphic/indicators in place of standard brass escutcheon
- STN** Satin Nickel finish
- MB** Matte Black finish
- BBZ** Brushed Bronze finish
- L1** Less showerhead
- L2** Less hand shower wand
- L3** Less showerhead & hand shower wand
- L4** Less head, arm and flange
- L5** Less hand shower system (less bar/ cradle, hose, wand and elbow)
- L7** Less handle
- TC** Test Cap Trim (includes TA-10&T-12A) used with S16 series Temptrol Valve

Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.
10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



SKU Builder


Series	Finish	Modifier	Flow Rate	TRM (required)	TC	Final SKU
S3591B	STN		15	TRM		S3591BSTN15TRM
S3591	MB	L1		TRM	TC	S3591BML1TRMTC

Note: No more than two modifiers (L1-L7) and modifier order will follow numerical order.

Architectural/ Engineering Specification

Symmons Dia Shower and Hand Shower Trim _____ Includes Dia Shower and Hand Shower Trim powered by Temptrol® Pressure Balancing Tub and Shower Valve. Features integral diverter control, metal lever handle, 30" slide bar for hand shower wand, dual checks for backflow protection, 60" flexible metal hose, 7 mode hand shower wand, 7 mode showerhead, and standard 2.0 gpm (7.6 L/min) flow restrictors. Components shall be metal and nonmetal construction, plated in standard polished chrome finish. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 1.75 gpm (6.6 L/min), 2.0 gpm (7.6 L/min) compliant. Available options: "15 - 1.5 gpm (5.7 L/min) flow restrictor", "175 - 1.75 gpm (6.6 L/min) flow restrictor", "Delete Suffix B - Chrome plastic escutcheon, "STN - Satin Nickel finish", "MB - Matte Black finish", "BBZ - Brushed Bronze finish", "L1 - Less showerhead", "L2 - Less hand shower wand", "L3 - Less showerhead & hand shower wand", "L4 - Less head, arm and flange", "L5 - Less hand shower system (less bar/ cradle, hose, wand and elbow)", "L7 - Less handle", and "TC - Test Cap Trim".

Dimensions

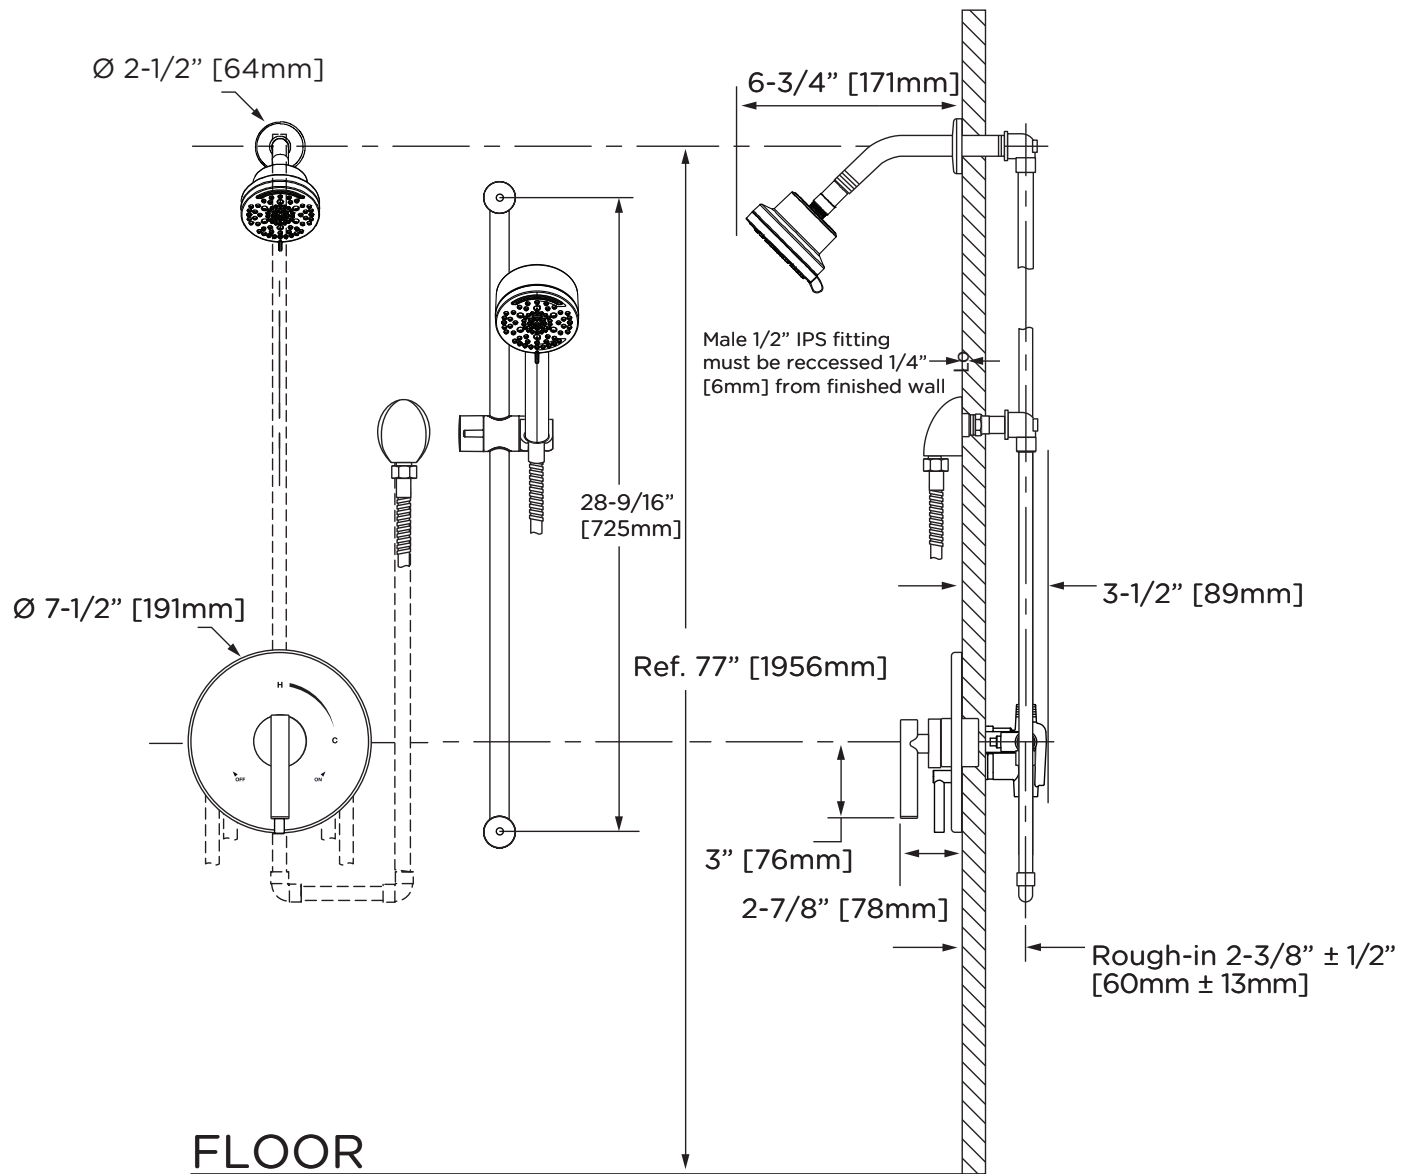

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls $1/2''$ or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.